



TEST REPORT

Applicant: BRAYTRON S.R.L.

Address of Applicant: B.DUL IULIU MANIU, NR.616, CORP B, ETAJ 1 SECTOR 6,
061129, BUCHAREST, ROMANIA

Equipment Under Test (EUT)

Product Name: LED LIGHTING FIXTURE

Brand Name: **Braytron**

Model No.: Please Refer To Page 5-7.

Applicable standards: EN IEC 55015:2019+A11:2020

EN IEC 61547: 2023

EN IEC 61000-3-2:2019+A1:2021

EN 61000-3-3:2013+A1:2019+A2:2021

Date of sample receipt: June 5, 2024

Date of Test: June 5, 2024 To June 12, 2024

Date of report issued: June 12, 2024

Test Result : PASS *

*In the configuration tested, the EUT complied with the standards specified above.

The CE mark as shown below can be used, under the responsibility of the manufacturer, after completion of an EU Declaration of Conformity and compliance with all relevant EU Directives.

Authorized Signature

Kevin Wang
Laboratory Manager





2 Version

Version No.	Date	Description
00	June 12, 2024	Original

Prepared By:

Gary Wang

Project Engineer

Date:

June 12, 2024



Reviewed By:

Kevin Wang

Reviewer

Date:

June 12, 2024

EBO assures objectivity and justness of the test, and fulfill the duty of confidentiality for applicant's information. Applicant should undertake responsibility for the authenticity of submitted sample and information. The result(s) shown in this report refer only to the sample(s) tested. The test results only reflect the evaluation of the sample under test and are not authorized for other purposes. EBO do not accept any liability to you for any loss arising out of or in connection with this report, in contract, tort, by statute or otherwise. This report is invalid without signatures of approver and special seal for inspection of EBO, or it has been reproduced in full or part. This report shall not be published as advertisement without the approval of EBO. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. This document is issued by the company under its General Conditions of Service accessible at <http://www.ebotest.com/zjyb/318.html>.



3 Contents

	Page
1 COVER PAGE	1
2 VERSION	2
3 CONTENTS	3
4 TEST SUMMARY	4
5 GENERAL INFORMATION	8
5.1 CLIENT INFORMATION	8
5.2 GENERAL DESCRIPTION OF E.U.T	8
5.3 TEST MODE	8
5.4 DESCRIPTION OF SUPPORT UNITS	8
5.5 DEVIATION FROM STANDARDS	8
5.6 ABNORMALITIES FROM STANDARD CONDITIONS.....	8
5.7 MONITORING OF EUT FOR ALL IMMUNITY TEST.....	8
6 TEST INSTRUMENTS LIST	9
7 EMISSION TEST RESULTS	12
7.1 RADIATED EMISSIONS (9KHz-30MHz).....	12
7.2 RADIATED EMISSIONS (30MHz-1000MHz).....	16
7.3 CONDUCTED EMISSIONS	19
7.4 HARMONICS CURRENT EMISSION	22
7.5 VOLTAGE FLUCTUATIONS AND FLICKER.....	22
8 IMMUNITY TEST RESULTS	23
8.1 PERFORMANCE CRITERIA DESCRIPTION OF EN IEC 61547	23
8.2 ELECTROSTATIC DISCHARGE.....	24
8.3 RADIATED IMMUNITY	26
8.4 ELECTRICAL FAST TRANSIENTS	28
8.5 SURGES	30
8.6 CONDUCTED IMMUNITY	32
8.7 VOLTAGE DIPS AND INTERRUPTIONS.....	34
9 EUT CONSTRUCTIONAL DETAILS	35

EBO assures objectivity and justness of the test, and fulfill the duty of confidentiality for applicant's information. Applicant should undertake responsibility for the authenticity of submitted sample and information. The result(s) shown in this report refer only to the sample(s) tested. The test results only reflect the evaluation of the sample under test and are not authorized for other purposes. EBO do not accept any liability to you for any loss arising out of or in connection with this report, in contract, tort, by statute or otherwise. This report is invalid without signatures of approver and special seal for inspection of EBO, or it has been reproduced in full or part. This report shall not be published as advertisement without the approval of EBO. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. This document is issued by the company under its General Conditions of Service accessible at <http://www.ebotest.com/zjyb/318.html>.



4 Test Summary

Test Item	Test Requirement	Test Method	Class / Severity	Result
Radiated Emissions (30MHz-1000MHz)	EN IEC 55015	EN IEC 55015	Table 10	Pass
Radiated Emissions (9kHz-30MHz)	EN IEC 55015	EN IEC 55015	Table 8	Pass
Conducted Emissions	EN IEC 55015	EN IEC 55015	Table 1	Pass
Harmonic Current Emission	EN IEC 61000-3-2	EN IEC 61000-3-2	Class C	Pass
Voltage Fluctuations and Flicker	EN 61000-3-3	EN 61000-3-3	Clause 5 of EN61000-3-3	Pass
Electrostatic discharges	EN IEC 61547	EN 61000-4-2	Contact \pm 4 kV Air \pm 8 kV	Pass
Radiated Immunity	EN IEC 61547	EN 61000-4-3	3V/m 80%, 1kHz, AM	Pass
Electrical Fast Transients	EN IEC 61547	EN 61000-4-4	AC \pm 1.0kV	Pass
Surges	EN IEC 61547	EN 61000-4-5	1kV Line to Line 2kV Line to Ground	Pass
Conducted Immunity	EN IEC 61547	EN 61000-4-6	3Vrms (emf), 80%, 1kHz Amp. Mod.	Pass
Voltage dips and Interruptions	EN IEC 61547	EN 61000-4-11	0 % UT for 0.5per 70 % UT for 10per UT is Supply Voltage	Pass

Remark:

UT* is the nominal supply voltage.

N/A: Not applicable.



Model No.:

BP01-62410	BP01-603X0	BP01-604X0	BP01-606X0
BP01-609X0	BP01-612X0	BP01-615X0	BP01-618X0
BP01-620X0	BP01-624X0	BP01-630X0	BP02-603X0
BP02-604X0	BP02-606X0	BP02-609X0	BP02-612X0
BP02-615X0	BP02-618X0	BP02-620X0	BP02-624X0
BP02-630X0	BP03-606X0	BP03-609X0	BP03-612X0
BP03-615X0	BP03-618X0	BP03-620X0	BP03-624X0
BP03-630X0	BP04-606X0	BP04-609X0	BP04-612X0
BP04-615X0	BP04-618X0	BP04-620X0	BP04-624X0
BP04-630X0	BP04-636X0	BP04-640X0	BP04-645X0
BP04-648X0	BP04-650X0	BP04-655X0	BP04-660X0
BP04-665X0	BP01-X03XX	BP01-X04XX	BP01-X06XX
BP01-X08XX	BP01-X09XX	BP01-X10XX	BP01-X12XX
BP01-X16XX	BP01-X18XX	BP01-X20XX	BP01-X24XX
BP01-X30XX	BP01-X32XX	BP01-X36XX	BP01-X40XX
BP01-X45XX	BP01-X50XX	BP01-X55XX	BP01-X60XX
BP01-X65XX	BP01-X70XX	BP01-X75XX	BP02-X03XX
BP02-X04XX	BP02-X06XX	BP02-X08XX	BP02-X09XX
BP02-X10XX	BP02-X12XX	BP02-X16XX	BP02-X18XX
BP02-X20XX	BP02-X24XX	BP02-X30XX	BP02-X32XX
BP02-X36XX	BP02-X40XX	BP02-X45XX	BP02-X50XX
BP02-X55XX	BP02-X60XX	BP02-X65XX	BP02-X70XX
BP02-X75XX	BP03-X03XX	BP03-X04XX	BP03-X06XX
BP03-X08XX	BP03-X09XX	BP03-X10XX	BP03-X12XX
BP03-X16XX	BP03-X18XX	BP03-X20XX	BP03-X24XX
BP03-X30XX	BP03-X32XX	BP03-X36XX	BP03-X40XX
BP03-X45XX	BP03-X50XX	BP03-X55XX	BP03-X60XX
BP03-X65XX	BP03-X70XX	BP03-X75XX	BP04-X03XX
BP04-X04XX	BP04-X06XX	BP04-X08XX	BP04-X09XX
BP04-X10XX	BP04-X12XX	BP04-X16XX	BP04-X18XX
BP04-X20XX	BP04-X24XX	BP04-X30XX	BP04-X32XX
BP04-X36XX	BP04-X40XX	BP04-X45XX	BP04-X50XX
BP04-X55XX	BP04-X60XX	BP04-X65XX	BP04-X70XX

EBO assures objectivity and justness of the test, and fulfill the duty of confidentiality for applicant's information. Applicant should undertake responsibility for the authenticity of submitted sample and information. The result(s) shown in this report refer only to the sample(s) tested. The test results only reflect the evaluation of the sample under test and are not authorized for other purposes. EBO do not accept any liability to you for any loss arising out of or in connection with this report, in contract, tort, by statute or otherwise. This report is invalid without signatures of approver and special seal for inspection of EBO, or it has been reproduced in full or part. This report shall not be published as advertisement without the approval of EBO. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. This document is issued by the company under its General Conditions of Service accessible at <http://www.ebotest.com/zjyb/318.html>.



BP04-X75XX	BP05-X03XX	BP05-X04XX	BP05-X06XX
BP05-X08XX	BP05-X09XX	BP05-X10XX	BP05-X12XX
BP05-X16XX	BP05-X18XX	BP05-X20XX	BP05-X24XX
BP05-X30XX	BP05-X32XX	BP05-X36XX	BP05-X40XX
BP05-X45XX	BP05-X50XX	BP05-X55XX	BP05-X60XX
BP05-X65XX	BP05-X70XX	BP05-X75XX	BP06-X03XX
BP06-X04XX	BP06-X06XX	BP06-X08XX	BP06-X09XX
BP06-X10XX	BP06-X12XX	BP06-X16XX	BP06-X18XX
BP06-X20XX	BP06-X24XX	BP06-X30XX	BP06-X32XX
BP06-X36XX	BP06-X40XX	BP06-X45XX	BP06-X50XX
BP06-X55XX	BP06-X60XX	BP06-X65XX	BP06-X70XX
BP06-X75XX	BP07-X03XX	BP07-X04XX	BP07-X06XX
BP07-X08XX	BP07-X09XX	BP07-X10XX	BP07-X12XX
BP07-X16XX	BP07-X18XX	BP07-X20XX	BP07-X24XX
BP07-X30XX	BP07-X32XX	BP07-X36XX	BP07-X40XX
BP07-X45XX	BP07-X50XX	BP07-X55XX	BP07-X60XX
BP07-X65XX	BP07-X70XX	BP07-X75XX	BP08-X03XX
BP08-X04XX	BP08-X06XX	BP08-X08XX	BP08-X09XX
BP08-X10XX	BP08-X12XX	BP08-X16XX	BP08-X18XX
BP08-X20XX	BP08-X24XX	BP08-X30XX	BP08-X32XX
BP08-X36XX	BP08-X40XX	BP08-X45XX	BP08-X50XX
BP08-X55XX	BP08-X60XX	BP08-X65XX	BP08-X70XX
BP08-X75XX	BP09-X03XX	BP09-X04XX	BP09-X06XX
BP09-X08XX	BP09-X09XX	BP09-X10XX	BP09-X12XX
BP09-X16XX	BP09-X18XX	BP09-X20XX	BP09-X24XX
BP09-X30XX	BP09-X32XX	BP09-X36XX	BP09-X40XX
BP09-X45XX	BP09-X50XX	BP09-X55XX	BP09-X60XX
BP09-X65XX	BP09-X70XX	BP09-X75XX	BP10-X03XX
BP10-X04XX	BP10-X06XX	BP10-X08XX	BP10-X09XX
BP10-X10XX	BP10-X12XX	BP10-X16XX	BP10-X18XX
BP10-X20XX	BP10-X24XX	BP10-X30XX	BP10-X32XX
BP10-X36XX	BP10-X40XX	BP10-X45XX	BP10-X50XX
BP10-X55XX	BP10-X60XX	BP10-X65XX	BP10-X70XX

EBO assures objectivity and justness of the test, and fulfill the duty of confidentiality for applicant's information. Applicant should undertake responsibility for the authenticity of submitted sample and information. The result(s) shown in this report refer only to the sample(s) tested. The test results only reflect the evaluation of the sample under test and are not authorized for other purposes. EBO do not accept any liability to you for any loss arising out of or in connection with this report, in contract, tort, by statute or otherwise. This report is invalid without signatures of approver and special seal for inspection of EBO, or it has been reproduced in full or part. This report shall not be published as advertisement without the approval of EBO. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. This document is issued by the company under its General Conditions of Service accessible at <http://www.ebotest.com/zjyb/318.html>.



BP10-X75XX	BP11-X03XX	BP11-X04XX	BP11-X06XX
BP11-X08XX	BP11-X09XX	BP11-X10XX	BP11-X12XX
BP11-X16XX	BP11-X18XX	BP11-X20XX	BP11-X24XX
BP11-X30XX	BP11-X32XX	BP11-X36XX	BP11-X40XX
BP11-X45XX	BP11-X50XX	BP11-X55XX	BP11-X60XX
BP11-X65XX	BP11-X70XX	BP11-X75XX	BP12-X03XX
BP12-X04XX	BP12-X06XX	BP12-X08XX	BP12-X09XX
BP12-X10XX	BP12-X12XX	BP12-X16XX	BP12-X18XX
BP12-X20XX	BP12-X24XX	BP12-X30XX	BP12-X32XX
BP12-X36XX	BP12-X40XX	BP12-X45XX	BP12-X50XX
BP12-X55XX	BP12-X60XX	BP12-X65XX	BP12-X70XX
BP12-X75XX	BP13-X03XX	BP13-X04XX	BP13-X06XX
BP13-X08XX	BP13-X09XX	BP13-X10XX	BP13-X12XX
BP13-X16XX	BP13-X18XX	BP13-X20XX	BP13-X24XX
BP13-X30XX	BP13-X32XX	BP13-X36XX	BP13-X40XX
BP13-X45XX	BP13-X50XX	BP13-X55XX	BP13-X60XX
BP13-X65XX	BP13-X70XX	BP13-X75XX	BP14-X03XX
BP14-X04XX	BP14-X06XX	BP14-X08XX	BP14-X09XX
BP14-X10XX	BP14-X12XX	BP14-X16XX	BP14-X18XX
BP14-X20XX	BP14-X24XX	BP14-X30XX	BP14-X32XX
BP14-X36XX	BP14-X40XX	BP14-X45XX	BP14-X50XX
BP14-X55XX	BP14-X60XX	BP14-X65XX	BP14-X70XX
BP14-X75XX			
X=0,1,2,3,4,5,6,7,8,9			
Remark: All models are identical in the same PCB layout, interior structure and electrical circuits. The only differences are the model name and appearance color for commercial purpose.			

EBO assures objectivity and justness of the test, and fulfill the duty of confidentiality for applicant's information. Applicant should undertake responsibility for the authenticity of submitted sample and information. The result(s) shown in this report refer only to the sample(s) tested. The test results only reflect the evaluation of the sample under test and are not authorized for other purposes. EBO do not accept any liability to you for any loss arising out of or in connection with this report, in contract, tort, by statute or otherwise. This report is invalid without signatures of approver and special seal for inspection of EBO, or it has been reproduced in full or part. This report shall not be published as advertisement without the approval of EBO. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. This document is issued by the company under its General Conditions of Service accessible at <http://www.ebotest.com/zjyb/318.html>.



5 General Information

5.1 Client Information

Applicant:	BRAYTRON S.R.L.
Address of Applicant:	B.DUL IULIU MANIU, NR.616, CORP B, ETAJ 1 SECTOR 6, 061129, BUCHAREST, ROMANIA
Manufacturer:	DEMGRUP INTERNATIONAL LIGHTING LIMITED
Address of Manufacturer:	UNIT D 16/F, ONE CAPITAL PLACE, 18 LUARD ROAD, WAN CHAI, HONG KONG

5.2 General Description of E.U.T

Product Name:	LED LIGHTING FIXTURE
Brand Name:	Braytron
Model No.:	Please Refer To Page 5-7
Test Model No.:	BP01-62410
Power Supply:	AC 220-240V, 24W, 50/60Hz

5.3 Test mode

On mode	Keep the EUT lighting
---------	-----------------------

5.4 Description of Support Units

None.

5.5 Deviation from Standards

None.

5.6 Abnormalities from Standard Conditions

None.

5.7 Monitoring of EUT for All Immunity Test

Visual:	Monitor the lighting of EUT
Audio:	N/A



6 Test Instruments List

Radiated Emission:						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
1	3m Semi- Anechoic Chamber	ZhongYu Electron	9.2(L)*6.2(W)* 6.4(H)	GTS250	N/A	N/A
2	Control Room	ZhongYu Electron	6.2(L)*2.5(W)* 2.4(H)	GTS251	N/A	N/A
3	EMI Test Receiver	ROHDE & SCHWARZ	ESRP	GTS602	Mar. 16 2024	Mar. 15 2025
4	BiConiLog Antenna	SCHWARZBECK	VULB 9168	GTS606	Mar. 16 2024	Mar. 15 2025
5	Double -ridged waveguide horn	SCHWARZBECK MESS-ELEKTRONIK	BBHA 9120 D	GTS208	June. 21 2023	June. 20 2024
6	Horn Antenna	ETS-LINDGREN	3160	GTS217	June. 21 2023	June. 20 2024
7	EMI Test Software	AUDIX	E3	N/A	N/A	N/A
8	Coaxial Cable	GTS	N/A	GTS213	June. 21 2023	June. 20 2024
9	Coaxial Cable	GTS	N/A	GTS211	June. 21 2023	June. 20 2024
10	Coaxial cable	GTS	N/A	GTS210	June. 21 2023	June. 20 2024
11	Coaxial Cable	GTS	N/A	GTS212	June. 21 2023	June. 20 2024
12	Amplifier(100kHz-3GHz)	N/A	LNA 0920N	GTS605	Mar. 16 2024	Mar. 15 2025
13	Amplifier(2GHz-20GHz)	HP	84722A	GTS206	June. 21 2023	June. 20 2024
14	Amplifier (18-26GHz)	Rohde & Schwarz	AFS33-18002 650-30-8P-44	GTS218	June. 21 2023	June. 20 2024
15	Band filter	Amindeon	82346	GTS219	June. 21 2023	June. 20 2024
16	Power Meter	Anritsu	ML2495A	GTS540	June. 21 2023	June. 20 2024
17	Power Sensor	Anritsu	MA2411B	GTS541	June. 21 2023	June. 20 2024
18	Wideband Radio Communication Tester	Rohde & Schwarz	CMW500	GTS575	June. 21 2023	June. 20 2024
19	Splitter	Agilent	11636B	GTS237	June. 21 2023	June. 20 2024
20	Loop Antenna	ZHINAN	ZN30900A	GTS534	June. 21 2023	June. 20 2024
21	Breitband hornantenne	SCHWARZBECK	BBHA 9170	GTS579	Oct. 6 2023	Oct. 5 2024
22	Amplifier	TDK	PA-02-02	GTS574	Oct. 6 2023	Oct. 5 2024
23	Amplifier	TDK	PA-02-03	GTS576	Oct. 6 2023	Oct. 5 2024
24	PSA Series Spectrum Analyzer	Rohde & Schwarz	FSP	GTS578	June. 21 2023	June. 20 2024

Conducted Emission						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
1	Shielding Room	ZhongYu Electron	7.3(L)x3.1(W)x2.9(H)	GTS252	May.14 2022	May.13 2025
2	EMI Test Receiver	R&S	ESCI 7	GTS552	June. 21 2023	June. 20 2024
3	Coaxial Switch	ANRITSU CORP	MP59B	GTS225	June. 21 2023	June. 20 2024
4	ENV216 2-L-V-NETZNACHB.DE	ROHDE&SCHWARZ	ENV216	GTS226	June. 21 2023	June. 20 2024
5	Coaxial Cable	GTS	N/A	GTS227	N/A	N/A
6	EMI Test Software	AUDIX	E3	N/A	N/A	N/A
7	Thermo meter	KTJ	TA328	GTS233	June. 21 2023	June. 20 2024
8	Absorbing clamp	Elektronik-Feinmechanik	MDS21	GTS229	June. 21 2023	June. 20 2024

EBO assures objectivity and justness of the test, and fulfill the duty of confidentiality for applicant's information. Applicant should undertake responsibility for the authenticity of submitted sample and information. The result(s) shown in this report refer only to the sample(s) tested. The test results only reflect the evaluation of the sample under test and are not authorized for other purposes. EBO do not accept any liability to you for any loss arising out of or in connection with this report, in contract, tort, by statute or otherwise. This report is invalid without signatures of approver and special seal for inspection of EBO, or it has been reproduced in full or part. This report shall not be published as advertisement without the approval of EBO. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. This document is issued by the company under its General Conditions of Service accessible at <http://www.ebotest.com/zjyb/318.html>.



9	ISN	SCHWARZBECK	NTFM 8158	GTS565	June. 21 2023	June. 20 2024
---	-----	-------------	-----------	--------	---------------	---------------

ESD						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
1	ESD Simulator	KIKUSUI	KES4021A	GTS242	June. 21 2023	June. 20 2024
2	Thermo meter	KTJ	TA328	GTS243	June. 21 2023	June. 20 2024

Conducted Immunity						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
1	Signal Generator	ROHDE & SCHWARZ	SMB 100A	GTS553	June. 21 2023	June. 20 2024
2	CDN	LionCEL	CDN-M3-16	GTS554	June. 21 2023	June. 20 2024
3	CDN	CYBERTEK	EM 5070	GTS559	June. 21 2023	June. 20 2024
4	Power amplifier	rflight	NTWPA-00010475	GTS555	June. 21 2023	June. 20 2024
5	ATT	SUNWAVE	SJ-50-06DB	GTS556	June. 21 2023	June. 20 2024
6	Clamp	SCHAFFNER	KEMZ 801	GTS558	June. 21 2023	June. 20 2024

Harmonic/ Flicker						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
1	Power Analyzer H/F	EMTEST	DPA500	GTS235	June. 21 2023	June. 20 2024
2	AC POWER SUPPLY	EMTEST	ACS500	GTS236	June. 21 2023	June. 20 2024
3	Thermo meter	KTJ	TA328	GTS256	June. 21 2023	June. 20 2024

EFT, Surge, Voltage dips and Interruption						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
1	EMTEST system	EMTEST	UCS500N	GTS239	June. 21 2023	June. 20 2024
2	Clamp	EMTEST	HFK	GTS557	June. 21 2023	June. 20 2024
3	Thermo meter	KTJ	TA328	GTS238	June. 21 2023	June. 20 2024

Radiated Immunity						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
1	Fully-Anechoic Chamber 2	Chang Zhou Zhong Shuo	854	SEM001-05	April. 07, 2024	April. 06, 2025
2	Power Sensor	Rohde & Schwarz	NRP-Z91	SEM009-09	April. 07, 2024	April. 06, 2025
3	Stacked Log.-Per.-Broadband Antenna (70MHz-10GHz)	Schwarzbeck	STLP 9129	SEM003-25	N/A	N/A
4	Signal Generator (9kHz-6GHz)	Rohde & Schwarz	SMB100A	SEM006-11	April. 07, 2024	April. 06, 2025
5	Broadband Amplifier (80MHz-1GHz)	Rohde & Schwarz	BBA150-BC250	SEM005-12	Sep. 19 2024	Sep. 18 2025
6	Broadband Amplifier(800MHz-3GHz)	Rohde & Schwarz	BBA150-D110	SEM005-13	April. 07, 2024	April. 06, 2025
7	Broadband Amplifier(2.5GHz-	Rohde & Schwarz	BBA150-E60	SEM005-16	April. 07, 2024	April. 06, 2025

EBO assures objectivity and justness of the test, and fulfill the duty of confidentiality for applicant's information. Applicant should undertake responsibility for the authenticity of submitted sample and information. The result(s) shown in this report refer only to the sample(s) tested. The test results only reflect the evaluation of the sample under test and are not authorized for other purposes. EBO do not accept any liability to you for any loss arising out of or in connection with this report, in contract, tort, by statute or otherwise. This report is invalid without signatures of approver and special seal for inspection of EBO, or it has been reproduced in full or part. This report shall not be published as advertisement without the approval of EBO. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. This document is issued by the company under its General Conditions of Service accessible at <http://www.ebotest.com/zjyb/318.html>.




	6GHz)					
8	Measurement Software	Rohde & Schwarz	EMC32 V9.25.00	N/A	N/A	N/A

General used equipment:						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
1	Humidity/ Temperature Indicator	KTJ	TA328	GTS243	June. 21 2023	June. 20 2024
2	Barometer	ChangChun	DYM3	GTS255	June. 21 2023	June. 20 2024

EBO assures objectivity and justness of the test, and fulfill the duty of confidentiality for applicant's information. Applicant should undertake responsibility for the authenticity of submitted sample and information. The result(s) shown in this report refer only to the sample(s) tested. The test results only reflect the evaluation of the sample under test and are not authorized for other purposes. EBO do not accept any liability to you for any loss arising out of or in connection with this report, in contract, tort, by statute or otherwise. This report is invalid without signatures of approver and special seal for inspection of EBO, or it has been reproduced in full or part. This report shall not be published as advertisement without the approval of EBO. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. This document is issued by the company under its General Conditions of Service accessible at <http://www.ebotest.com/zjyb/318.html>.

7 Emission Test Results


7.1 Radiated Emissions (9kHz-30MHz)

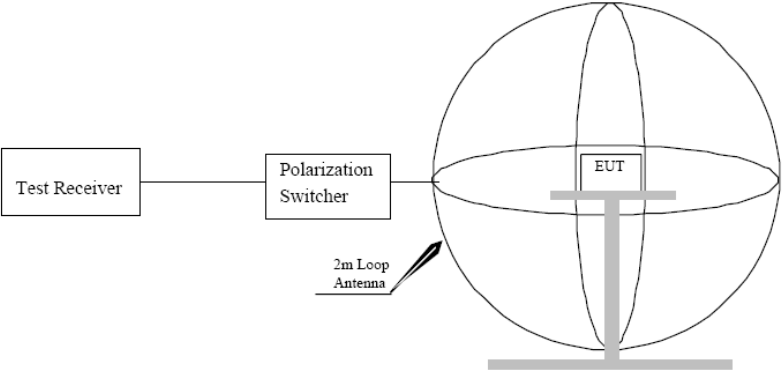Test Requirement:	EN IEC 55015		
Test Method:	EN IEC 55015		
Test Frequency Range:	9kHz to 30MHz		
Limit:	Frequency range (MHz)		Limits for loop diameter dBuA @2m
	0.009-0.070		88
	0.070-0.150		88 to 58*
	0.15-3.0		58 to 22*
	3.0-30		22
<p>*Decreasing linearly with the logarithm of the frequency. For electrodeless lamps and luminaires, the limit in the frequency range of 2,2 MHz to 3,0 MHz is 58 dB(μA) for 2 m, 51dB(μA) for 3 m and 45 dB(μA) for 4 m loop diameter.</p>			
Test Setup:			
Test procedure	<ol style="list-style-type: none"> 1. An initial pre-scan was performed in the 2m loop antenna using the spectrum analyser in peak detection mode. 2. The EUT was measured for X(A), Y(B), Z(C) polarities. 3. No further quasi-peak measurements were performed since no peak emissions from the EUT were detected within 6dB of the limit for 2m diameter loop antenna. 		
Test Instruments:	Temp.: 25 °C	Humid.: 50%	Press.: 1012mbar
Measurement Record:	Uncertainty: ± 4.5dB		
Test Instruments:	Refer to section 6 for details		
Test mode:	Refer to section 5.3 for details.		
Test results:	Pass		



Measurement Data

Axial: X

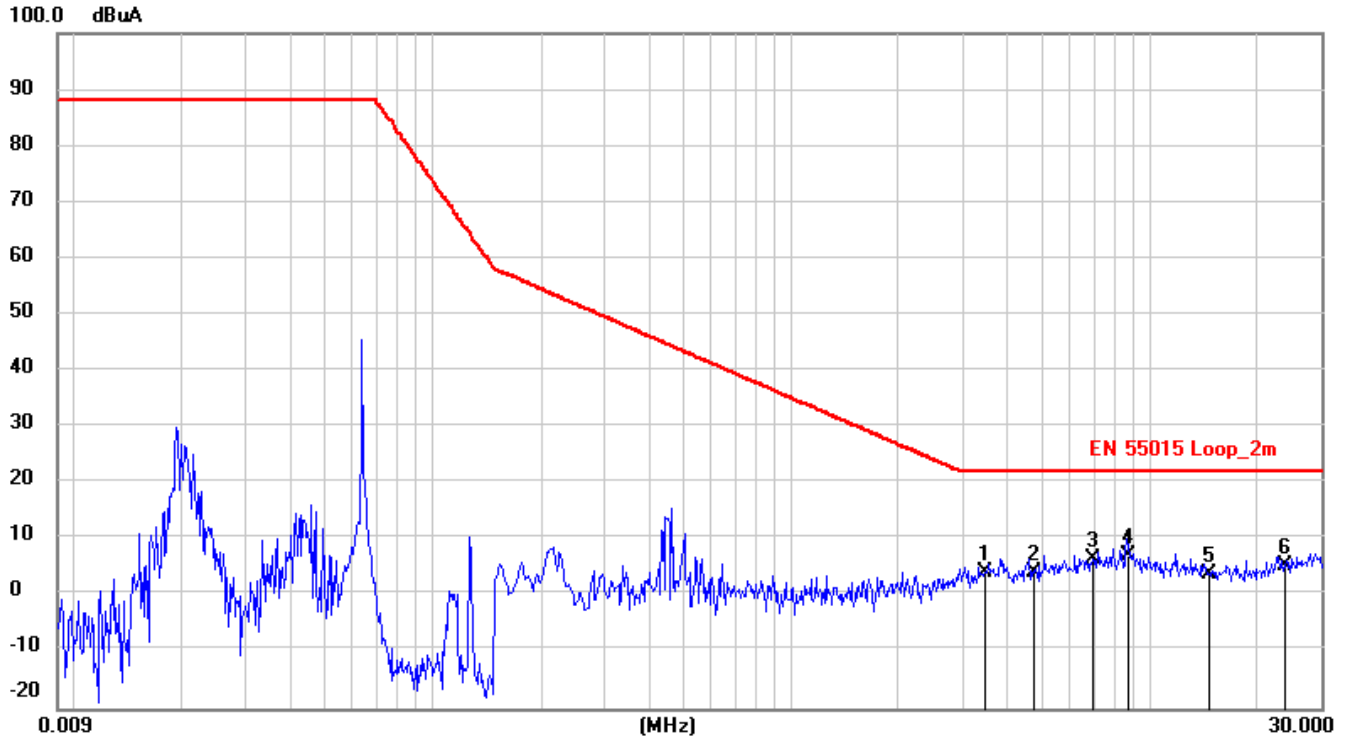


No.	Frequency (MHz)	Reading (dBuA)	Correct (dB)	Result (dBuA)	Limit (dBuA)	Margin (dB)	Remark
1	3.4891	-30.45	34.55	4.10	22.00	-17.90	QP
2	4.7581	-30.83	34.92	4.09	22.00	-17.91	QP
3	6.9631	-28.67	35.09	6.42	22.00	-15.58	QP
4	8.6776	-27.84	34.88	7.04	22.00	-14.96	QP
5	14.6491	-30.76	34.66	3.90	22.00	-18.10	QP
6	23.7391	-29.56	35.01	5.45	22.00	-16.55	QP

EBO assures objectivity and justness of the test, and fulfill the duty of confidentiality for applicant's information. Applicant should undertake responsibility for the authenticity of submitted sample and information. The result(s) shown in this report refer only to the sample(s) tested. The test results only reflect the evaluation of the sample under test and are not authorized for other purposes. EBO do not accept any liability to you for any loss arising out of or in connection with this report, in contract, tort, by statute or otherwise. This report is invalid without signatures of approver and special seal for inspection of EBO, or it has been reproduced in full or part. This report shall not be published as advertisement without the approval of EBO. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. This document is issued by the company under its General Conditions of Service accessible at <http://www.ebotest.com/zjyb/318.html>.



Axial: Y

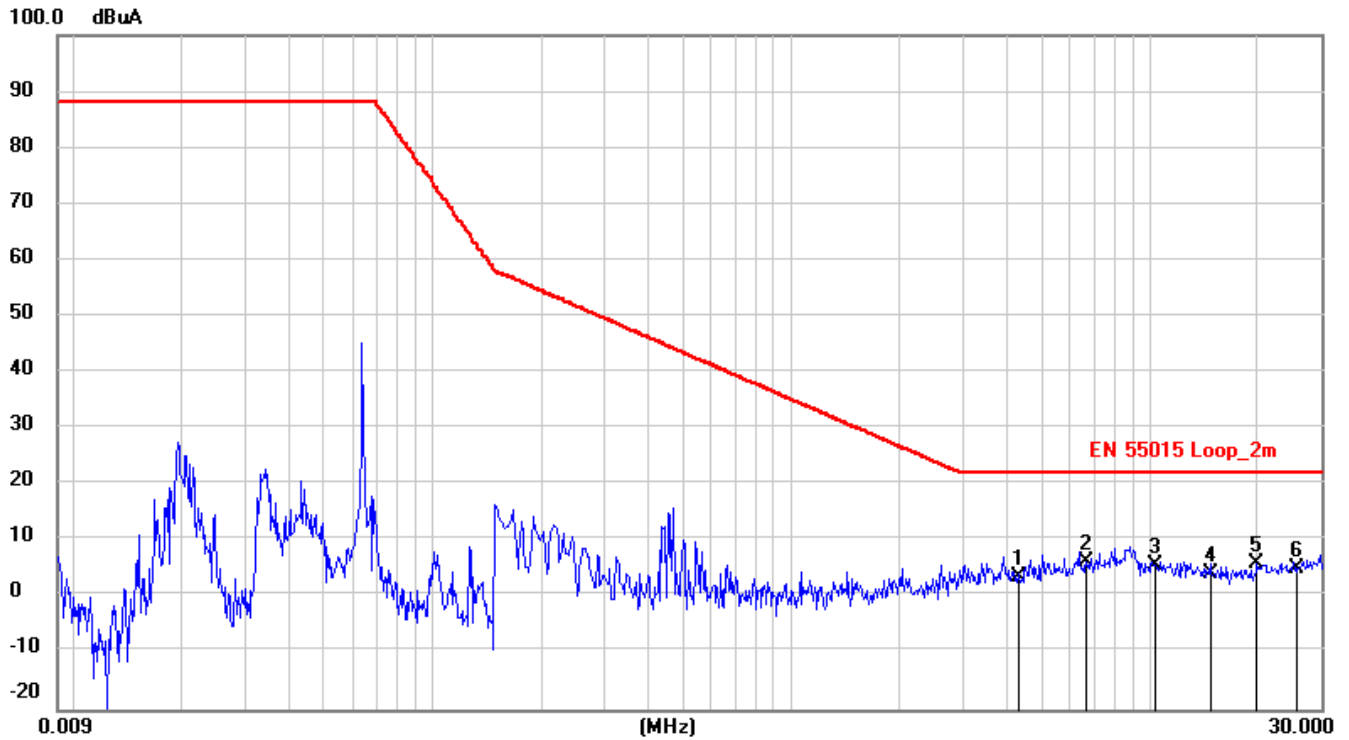


No.	Frequency (MHz)	Reading (dBuA)	Correct (dB)	Result (dBuA)	Limit (dBuA)	Margin (dB)	Remark
1	4.3351	-31.37	34.86	3.49	22.00	-18.51	QP
2	6.6751	-28.96	35.09	6.13	22.00	-15.87	QP
3	10.4326	-29.20	34.71	5.51	22.00	-16.49	QP
4	14.8516	-30.47	34.66	4.19	22.00	-17.81	QP
5	19.8466	-28.80	34.69	5.89	22.00	-16.11	QP
6	25.7731	-30.23	35.16	4.93	22.00	-17.07	QP

EBO assures objectivity and justness of the test, and fulfill the duty of confidentiality for applicant's information. Applicant should undertake responsibility for the authenticity of submitted sample and information. The result(s) shown in this report refer only to the sample(s) tested. The test results only reflect the evaluation of the sample under test and are not authorized for other purposes. EBO do not accept any liability to you for any loss arising out of or in connection with this report, in contract, tort, by statute or otherwise. This report is invalid without signatures of approver and special seal for inspection of EBO, or it has been reproduced in full or part. This report shall not be published as advertisement without the approval of EBO. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. This document is issued by the company under its General Conditions of Service accessible at <http://www.ebotest.com/zjyb/318.html>.




Axial: Z

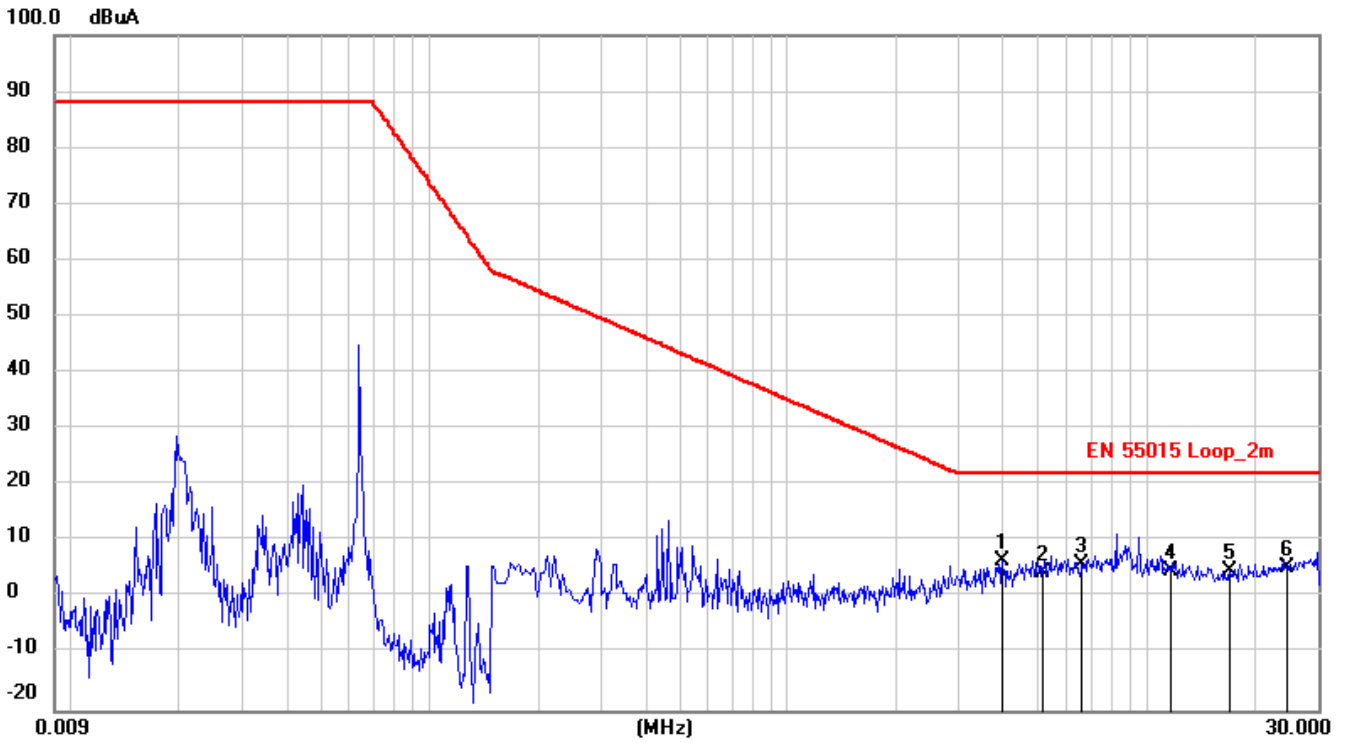

No.	Frequency (MHz)	Reading (dBuA)	Correct (dB)	Result (dBuA)	Limit (dBuA)	Margin (dB)	Remark
1	3.9751	-28.30	34.79	6.49	22.00	-15.51	QP
2	5.1450	-30.65	34.99	4.34	22.00	-17.66	QP
3	6.6301	-29.06	35.10	6.04	22.00	-15.96	QP
4	11.6251	-30.05	34.70	4.65	22.00	-17.35	QP
5	17.0296	-29.84	34.67	4.83	22.00	-17.17	QP
6	24.6616	-29.61	35.08	5.47	22.00	-16.53	QP

EBO assures objectivity and justness of the test, and fulfill the duty of confidentiality for applicant's information. Applicant should undertake responsibility for the authenticity of submitted sample and information. The result(s) shown in this report refer only to the sample(s) tested. The test results only reflect the evaluation of the sample under test and are not authorized for other purposes. EBO do not accept any liability to you for any loss arising out of or in connection with this report, in contract, tort, by statute or otherwise. This report is invalid without signatures of approver and special seal for inspection of EBO, or it has been reproduced in full or part. This report shall not be published as advertisement without the approval of EBO. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. This document is issued by the company under its General Conditions of Service accessible at <http://www.ebotest.com/zjyb/318.html>.


7.2 Radiated Emissions (30MHz-1000MHz)

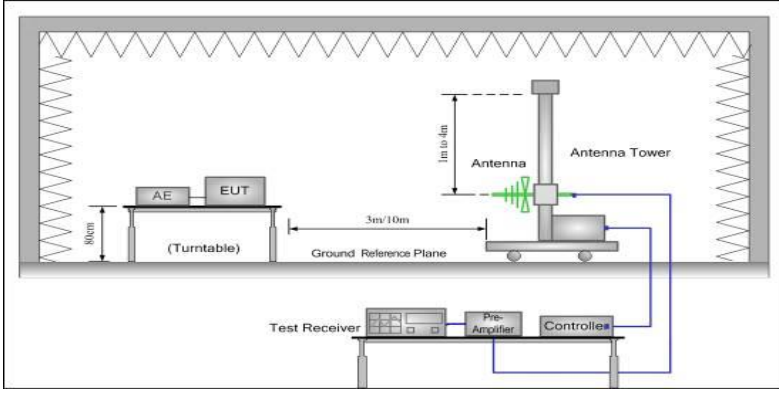Test Requirement:	EN IEC 55015		
Test Method:	EN IEC 55015		
Test Frequency Range:	30MHz to 1000MHz		
Measurement Distance:	3m		
Limit:	Frequency range(MHz)	Limit (dBuV/m)	
	30 to 230	40.00	
	230 to 1000	47.00	
Test setup:			
Test procedure	<ol style="list-style-type: none"> 1. The radiated emissions test was conducted in a semi-anechoic chamber. 2. The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane, but separated from metallic contact with the ground reference plane by 0.1m of insulation. 3. Before final measurements of radiated emissions, a pre-scan was performed in the spectrum mode with the peak detector to find out the maximum emissions spectrum plots of the EUT. 4. The frequencies of maximum emission were determined in the final radiated emissions measurement. At each frequency, the EUT was rotated 360°, and the antenna was raised and lowered from 1 to 4 meters in order to determine the maximum disturbance. Measurements were performed for both horizontal and vertical antenna polarization. 		
Test Instruments:	Temp.: 25 °C	Humid.: 50%	Press.: 1012mbar
Measurement Record:	Uncertainty: ± 4.50dB		
Test Instruments:	Refer to section 6 for details		
Test mode:	Refer to section 5.3 for details.		
Test results:	Pass		



Measurement Data

Test mode:	On mode	Antenna Polarity:	Horizontal
------------	---------	-------------------	------------

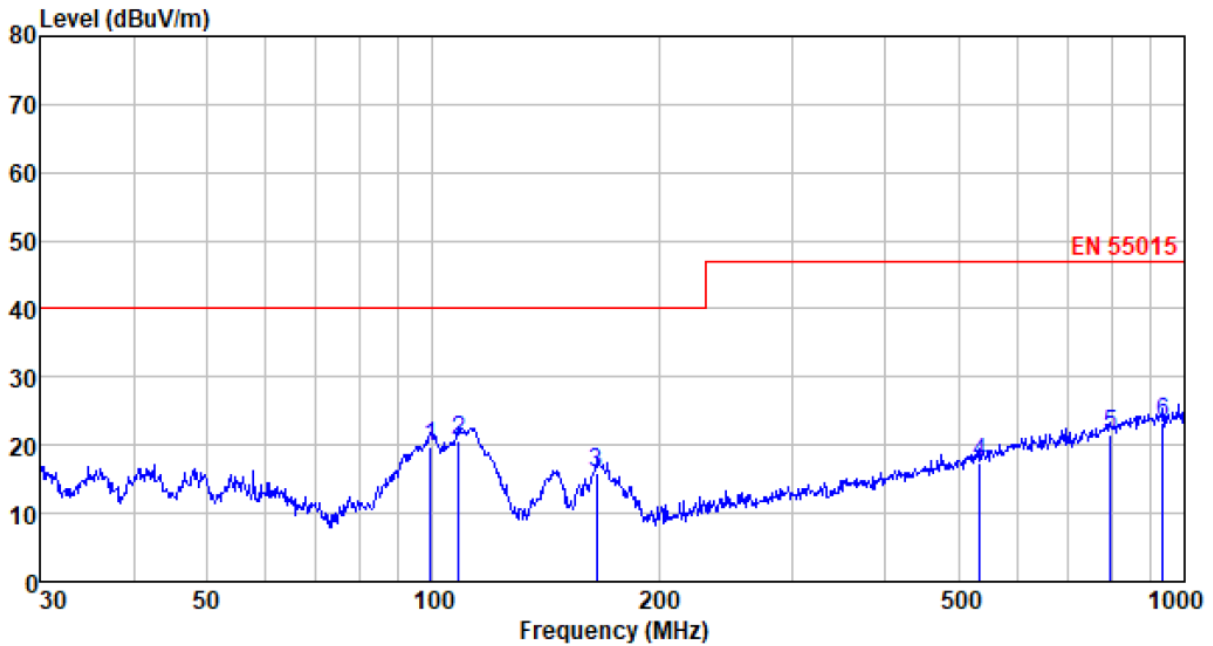


Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
99.180	43.12	12.13	1.18	36.71	19.72	40.00	-20.28	QP
108.267	44.93	11.26	1.26	36.79	20.66	40.00	-19.34	QP
164.908	43.05	8.40	1.66	37.16	15.95	40.00	-24.05	QP
533.832	33.38	18.07	3.46	37.52	17.39	47.00	-29.61	QP
796.183	33.26	21.34	4.45	37.62	21.43	47.00	-25.57	QP
935.546	33.47	22.45	4.99	37.57	23.34	47.00	-23.66	QP

Remarks: level = Reading level + Antenna factor + Cable loss - Preamp Factor

EBO assures objectivity and justness of the test, and fulfill the duty of confidentiality for applicant's information. Applicant should undertake responsibility for the authenticity of submitted sample and information. The result(s) shown in this report refer only to the sample(s) tested. The test results only reflect the evaluation of the sample under test and are not authorized for other purposes. EBO do not accept any liability to you for any loss arising out of or in connection with this report, in contract, tort, by statute or otherwise. This report is invalid without signatures of approver and special seal for inspection of EBO, or it has been reproduced in full or part. This report shall not be published as advertisement without the approval of EBO. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. This document is issued by the company under its General Conditions of Service accessible at <http://www.ebotest.com/zjyb/318.html>.



Test mode:	On mode	Antenna Polarity:	Vertical
------------	---------	-------------------	----------

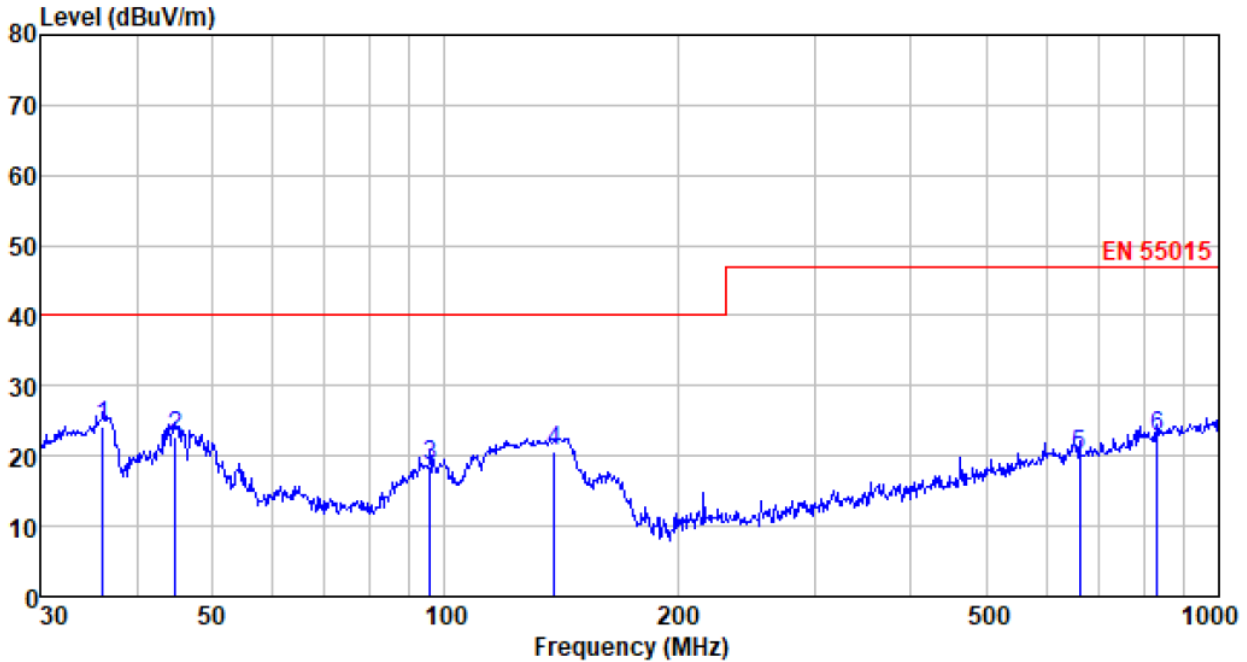

Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
36.127	47.44	11.52	0.62	35.43	24.15	40.00	-15.85	QP
44.901	45.62	12.25	0.72	35.93	22.66	40.00	-17.34	QP
95.762	42.59	11.59	1.16	36.69	18.65	40.00	-21.35	QP
138.387	48.53	7.54	1.50	37.01	20.56	40.00	-19.44	QP
661.151	34.22	19.56	3.95	37.60	20.13	47.00	-26.87	QP
833.317	33.97	21.71	4.58	37.61	22.65	47.00	-24.35	QP

Remarks: level = Reading level + Antenna factor + Cable loss - Preamp Factor



7.3 Conducted Emissions


Test Requirement:	EN IEC 55015		
Test Method:	EN IEC 55015		
Test Frequency Range:	9kHz to 30MHz		
Limit:	Frequency range (MHz)	Limit (dBuV)	
		Quasi-peak	Average
	0.009-0.05	110	-
	0.05-0.15	90-80*	-
	0.15-0.5	66 to 56*	56 to 46*
	0.5-5	56	46
	5-30	60	50
* Decreases with the logarithm of the frequency.			
Test setup:	<p><i>Remark:</i> E.U.T: Equipment Under Test LISN: Line Impedance Stabilization Network Test table height=0.8m</p>		
Test procedure	<ol style="list-style-type: none"> 1. The E.U.T and simulators are connected to the main power through a line impedance stabilization network(L.I.S.N.). The provide a 50ohm/50uH coupling impedance for the measuring equipment. 2. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm/50uH coupling impedance with 50ohm termination. (Please refers to the block diagram of the test setup and photographs). 3. Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to EN55022 Class B on conducted measurement. 		
Test Instruments:	Temp.: 25 °C	Humid.: 50%	Press.: 1012mbar
Measurement Record:	Uncertainty: ± 3.45dB		
Test Instruments:	Refer to section 6 for details		
Test mode:	Refer to section 5.3 for details.		
Test results:	Pass		

EBO assures objectivity and justness of the test, and fulfill the duty of confidentiality for applicant's information. Applicant should undertake responsibility for the authenticity of submitted sample and information. The result(s) shown in this report refer only to the sample(s) tested. The test results only reflect the evaluation of the sample under test and are not authorized for other purposes. EBO do not accept any liability to you for any loss arising out of or in connection with this report, in contract, tort, by statute or otherwise. This report is invalid without signatures of approver and special seal for inspection of EBO, or it has been reproduced in full or part. This report shall not be published as advertisement without the approval of EBO. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. This document is issued by the company under its General Conditions of Service accessible at <http://www.ebotest.com/zjyb/318.html>.



Measurement Data

Test mode:	On mode	Antenna Polarity:	Line
------------	---------	-------------------	------

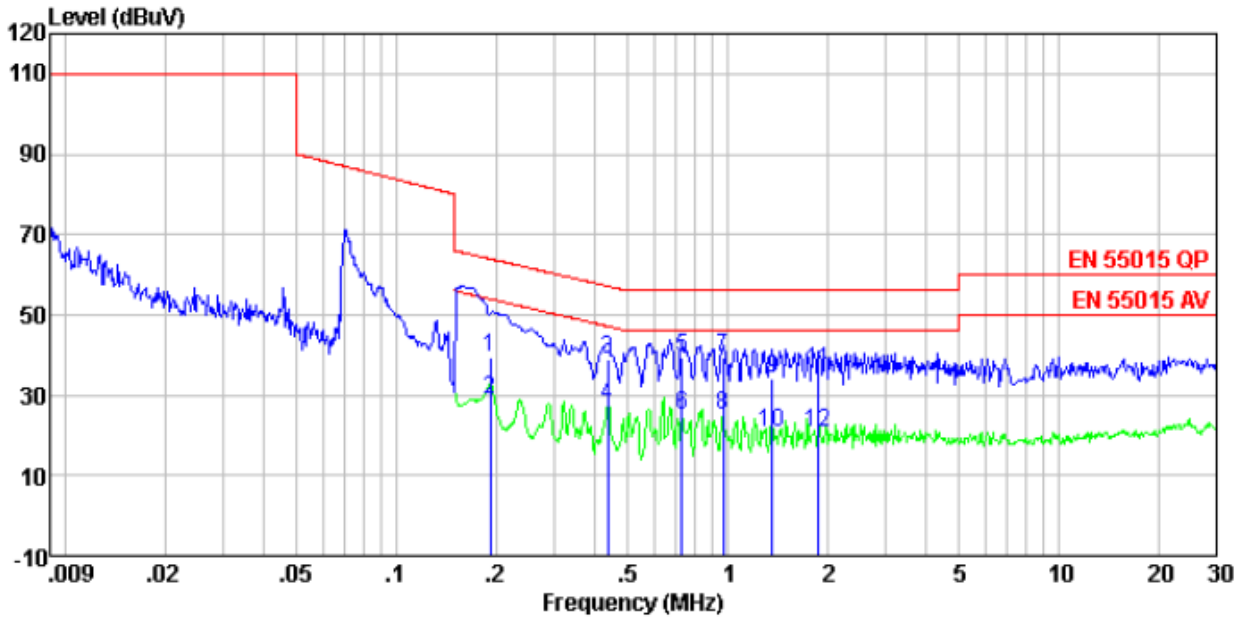


Freq MHz	Reading level dBuV	LISN/ISN factor dB/m	Cable loss dB	Level dBuV	Limit level dBuV	Over limit dB	Remark
0.19	19.01	20.40	0.11	39.52	63.93	-24.41	QP
0.19	8.22	20.40	0.11	28.73	53.93	-25.20	Average
0.44	18.63	20.34	0.11	39.08	57.15	-18.07	QP
0.44	6.79	20.34	0.11	27.24	47.15	-19.91	Average
0.73	18.92	20.25	0.13	39.30	56.00	-16.70	QP
0.73	4.51	20.25	0.13	24.89	46.00	-21.11	Average
0.97	19.05	20.20	0.15	39.40	56.00	-16.60	QP
0.97	4.49	20.20	0.15	24.84	46.00	-21.16	Average
1.37	13.62	20.20	0.16	33.98	56.00	-22.02	QP
1.37	0.31	20.20	0.16	20.67	46.00	-25.33	Average
1.89	15.82	20.20	0.17	36.19	56.00	-19.81	QP
1.89	0.48	20.20	0.17	20.85	46.00	-25.15	Average

EBO assures objectivity and justness of the test, and fulfill the duty of confidentiality for applicant's information. Applicant should undertake responsibility for the authenticity of submitted sample and information. The result(s) shown in this report refer only to the sample(s) tested. The test results only reflect the evaluation of the sample under test and are not authorized for other purposes. EBO do not accept any liability to you for any loss arising out of or in connection with this report, in contract, tort, by statute or otherwise. This report is invalid without signatures of approver and special seal for inspection of EBO, or it has been reproduced in full or part. This report shall not be published as advertisement without the approval of EBO. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. This document is issued by the company under its General Conditions of Service accessible at <http://www.ebotest.com/zjyb/318.html>.



Test mode:	On mode	Antenna Polarity:	Neutral
------------	---------	-------------------	---------

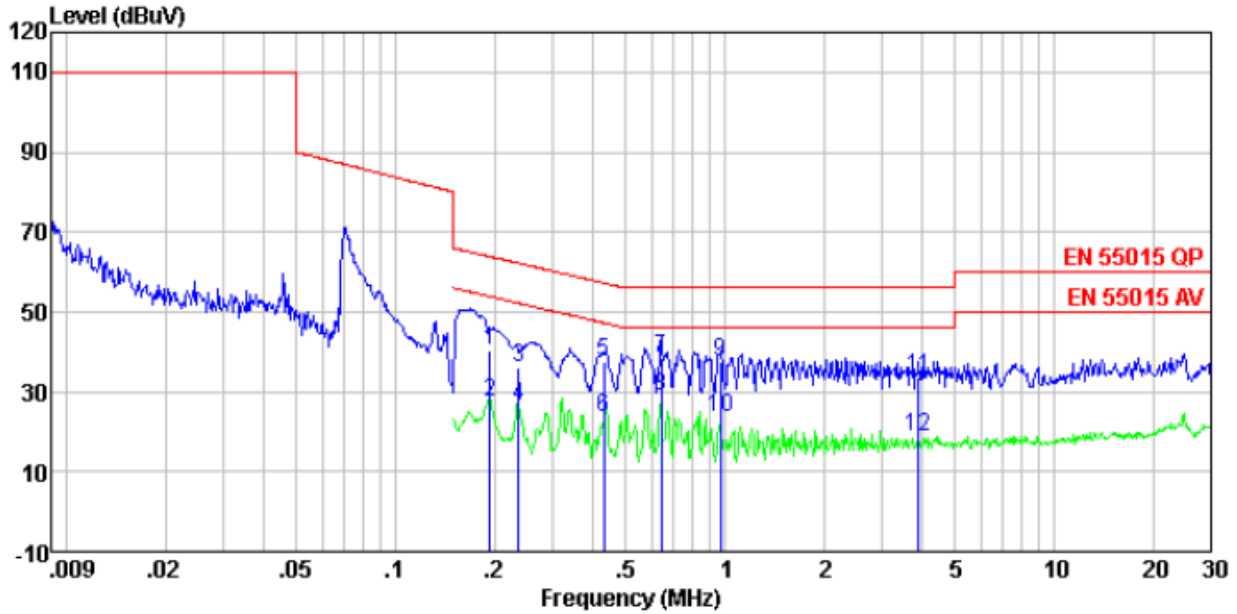

Freq MHz	Reading level dBuV	LISN/ISN factor dB/m	Cable loss dB	Level dBuV	Limit level dBuV	Over limit dB	Remark
0.19	20.07	20.40	0.11	40.58	63.89	-23.31	QP
0.19	6.85	20.40	0.11	27.36	53.89	-26.53	Average
0.24	15.38	20.40	0.11	35.89	62.22	-26.33	QP
0.24	5.86	20.40	0.11	26.37	52.22	-25.85	Average
0.43	17.10	20.34	0.11	37.55	57.24	-19.69	QP
0.43	2.91	20.34	0.11	23.36	47.24	-23.88	Average
0.64	18.22	20.27	0.12	38.61	56.00	-17.39	QP
0.64	8.37	20.27	0.12	28.76	46.00	-17.24	Average
0.97	16.97	20.20	0.15	37.32	56.00	-18.68	QP
0.97	3.30	20.20	0.15	23.65	46.00	-22.35	Average
3.88	13.35	20.20	0.18	33.73	56.00	-22.27	QP
3.88	-1.75	20.20	0.18	18.63	46.00	-27.37	Average

EBO assures objectivity and justness of the test, and fulfill the duty of confidentiality for applicant's information. Applicant should undertake responsibility for the authenticity of submitted sample and information. The result(s) shown in this report refer only to the sample(s) tested. The test results only reflect the evaluation of the sample under test and are not authorized for other purposes. EBO do not accept any liability to you for any loss arising out of or in connection with this report, in contract, tort, by statute or otherwise. This report is invalid without signatures of approver and special seal for inspection of EBO, or it has been reproduced in full or part. This report shall not be published as advertisement without the approval of EBO. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. This document is issued by the company under its General Conditions of Service accessible at <http://www.ebotest.com/zjyb/318.html>.



7.4 Harmonics Current Emission

Test Requirement:	EN IEC 61000-3-2		
Test Method:	EN IEC 61000-3-2		
Frequency range:	100Hz to 2kHz		
Measurement Time:	2.5 min		
Class/Severity:	Class C		
Detector:	As per EN 61000-3-2		
Test environment:	Temp.:24 °C	Humid.: 51%	Press.: 1012mbar
Test Instruments:	Refer to section 6 for details		
Test mode:	Refer to section 5.3 for details		
Test results:	Pass		

7.5 Voltage Fluctuations and Flicker

Test Requirement:	EN 61000-3-3		
Test Method:	EN 61000-3-3		
Class/Severity:	Clause 5 of EN 61000-3-3		
Measurement Time:	10 min		
Detector:	As per EN 61000-3-3		
Test environment:	Temp.:24 °C	Humid.: 51%	Press.: 1012mbar
Test Instruments:	Refer to section 6 for details		
Test mode:	Refer to section 5.3 for details		
Test results:	Pass		

Measurement Data

	EUT values	Limit	Result
Pst	0.024	1.00	PASS
dc [%]	0.000	3.30	PASS
dmax [%]	0.052	4.00	PASS
dt [s]	0.000	0.50	PASS

EBO assures objectivity and justness of the test, and fulfill the duty of confidentiality for applicant's information. Applicant should undertake responsibility for the authenticity of submitted sample and information. The result(s) shown in this report refer only to the sample(s) tested. The test results only reflect the evaluation of the sample under test and are not authorized for other purposes. EBO do not accept any liability to you for any loss arising out of or in connection with this report, in contract, tort, by statute or otherwise. This report is invalid without signatures of approver and special seal for inspection of EBO, or it has been reproduced in full or part. This report shall not be published as advertisement without the approval of EBO. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. This document is issued by the company under its General Conditions of Service accessible at <http://www.ebotest.com/zjyb/318.html>.




8 Immunity Test Results

8.1 Performance Criteria Description of EN IEC 61547

Criterion A:	During the test no change of the luminous intensity shall be observed and the regulating control, if any, shall operate during the test as intended.
Criterion B:	During the test the luminous intensity may change to any value. After the test the luminous intensity shall be restored to its initial value within 1 min(30min for high pressure gas discharge lamps). Regulating controls need not function during the test, but after the test the mode of the control shall be the same as before the test, provided that during the test no mode changing commands were given.
Criterion C:	During and after the test any change of the luminous intensity is allowed and the light source(s) may be extinguished. After the test, within 30 min, all functions shall return to normal if necessary by temporary interruption of the mains supply and/or operating the regulating control.

EBO assures objectivity and justness of the test, and fulfill the duty of confidentiality for applicant's information. Applicant should undertake responsibility for the authenticity of submitted sample and information. The result(s) shown in this report refer only to the sample(s) tested. The test results only reflect the evaluation of the sample under test and are not authorized for other purposes. EBO do not accept any liability to you for any loss arising out of or in connection with this report, in contract, tort, by statute or otherwise. This report is invalid without signatures of approver and special seal for inspection of EBO, or it has been reproduced in full or part. This report shall not be published as advertisement without the approval of EBO. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. This document is issued by the company under its General Conditions of Service accessible at <http://www.ebotest.com/zjyb/318.html>.

8.2 Electrostatic Discharge

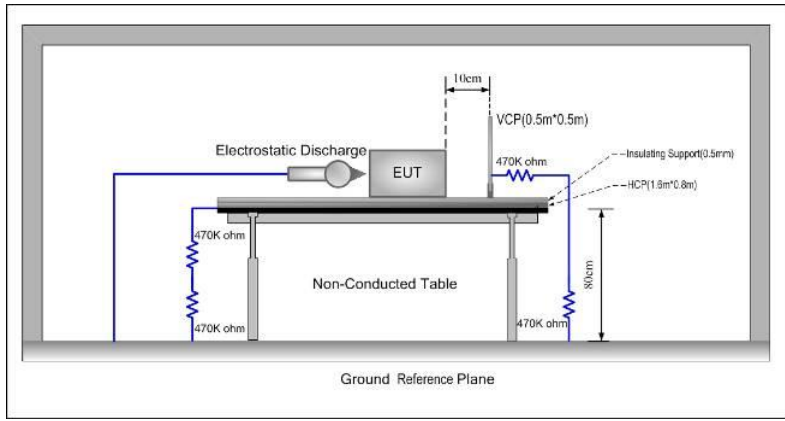Test Requirement:	EN IEC 61547
Test Method:	EN 61000-4-2
Discharge Voltage:	Contact Discharge: $\pm 4\text{kV}$ Air Discharge: $\pm 8\text{kV}$ HCP/VCP: $\pm 4\text{kV}$
Polarity:	Positive & Negative
Number of Discharge:	Minimum 10 times at each test point.
Discharge Mode:	Single Discharge
Discharge Period:	1 second minimum
Performance Criterion:	B
Test setup:	
Test Procedure:	<ol style="list-style-type: none"> Air discharge: The test was applied on non-conductive surfaces of EUT. The round discharge tip of the discharge electrode was approached as fast as possible to touch the EUT. After each discharge, the discharge electrode was removed from the EUT. The generator was re-triggered for a new single discharge and repeated 10 times for each pre-selected test point. This procedure was repeated until all the air discharge completed Contact Discharge: The test was applied on conductive surfaces of EUT. the generator was re-triggered for a new single discharge and repeated 10 times for each pre-selected test point. the tip of the discharge electrode was touch the EUT before the discharge switch was operated. Indirect discharge for horizontal coupling plane At least 10 single discharges shall be applied at the front edge of each HCP opposite the centre point of each unit of the EUT and 0.1m from the front of the EUT. The long axis of the discharge electrode shall be in the plane of the HCP and perpendicular to its front edge during the discharge. Consideration should be given to exposing all sides of the EUT.



	4. Indirect discharge for vertical coupling plane At least 10 single discharges were applied to the center of one vertical edge of the coupling plane. The coupling plane, of dimensions 0.5m X 0.5m, was placed parallel to, and positioned at a distance of 0.1m from the EUT. Discharges were applied to the coupling plane, with this plane in sufficient different positions that the four faces of the EUT are completely illuminated.		
Test environment:	Temp.: 24 °C	Humid.: 51%	Press.: 1012mbar
Test mode:	Refer to section 5.3 for detail		
Test Instruments:	Refer to section 6 for details		
Test results:	Pass		


Measurement Record:

Test points:	I: Metal shell			
	II: Seams			
Direct discharge				
Discharge Voltage (KV)	Type of discharge	Test points	Observations (Performance Criterion)	Result
± 4	Contact	I	A	Pass
± 8	Air	II	A	Pass
Indirect discharge				
Discharge Voltage (KV)	Type of discharge	Test points	Observation Performance	Result
± 4	HCP-Bottom/Top/ Front/Back/Left/Right	Edge of the HCP	A	Pass
± 4	VCP-Front/Back /Left/Right	Center of the VCP	A	Pass

Remark:

Performance Criteria: A, B, C: Refer to section 8.1 for details

8.3 Radiated Immunity

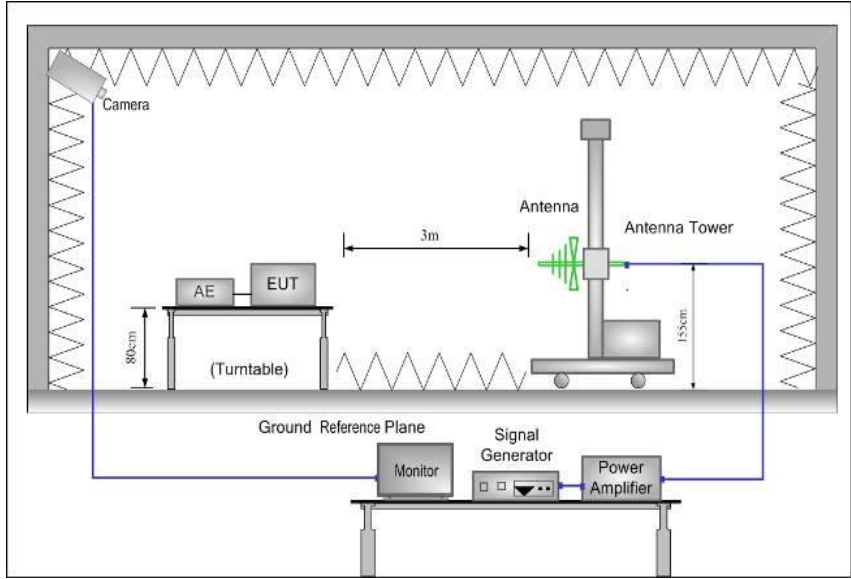Test Requirement:	EN IEC 61547
Test Method:	EN 61000-4-3
Frequency range:	80MHz to 1GHz
Test Level:	3V/m
Modulation:	80%, 1kHz Amplitude Modulation
Performance Criterion:	A
Test setup:	
Test Procedure:	<ol style="list-style-type: none"> 1. For table-top equipment, the EUT was placed in the chamber on a non-conductive table 0.8m high. For arrangement of floor-standing equipment, the EUT was mounted on a non-conductive support 0.1m above the supporting plane. For human body-mounted equipment, the EUT may be tested in the same manner as table top items. 2. If possible, a minimum of 1 m of cable is exposed to the electromagnetic field. Excess length of cables interconnecting units of the EUT shall be bundled low-inductively in the approximate center of the cable to form a bundle 30 cm to 40 cm in length. 3. The EUT was initially placed with one face coincident with the calibration plane. The EUT face being illuminated was contained within the UFA (Uniform Field Area). 4. The frequency ranges to be considered were swept with the signal modulated and pausing to adjust the RF signal level or to switch oscillators and antennas as necessary. Where the frequency range was swept incrementally, the step size was not exceed 1 % of the preceding frequency value. 5. The dwell time of the amplitude modulated carrier at each frequency was not be less than the time necessary for the EUT to be exercised and to respond, and was not less than 0,5 s. 6. The test normally was performed with the generating antenna facing

EBO assures objectivity and justness of the test, and fulfill the duty of confidentiality for applicant's information. Applicant should undertake responsibility for the authenticity of submitted sample and information. The result(s) shown in this report refer only to the sample(s) tested. The test results only reflect the evaluation of the sample under test and are not authorized for other purposes. EBO do not accept any liability to you for any loss arising out of or in connection with this report, in contract, tort, by statute or otherwise. This report is invalid without signatures of approver and special seal for inspection of EBO, or it has been reproduced in full or part. This report shall not be published as advertisement without the approval of EBO. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. This document is issued by the company under its General Conditions of Service accessible at <http://www.ebotest.com/zjyb/318.html>.



	each side of the EUT.		
	7. The polarization of the field generated by each antenna necessitates testing each selected side twice, once with the antenna positioned vertically and again with the antenna positioned horizontally.		
	8. The EUT was performed in a configuration to actual installation conditions, a video camera and/or a audio monitor were used to monitor the performance of the EUT.		
Test environment:	Temp.: 25 °C	Humid.: 52%	Press.: 1012mbar
Test Instruments:	Refer to section 6 for details		
Test mode:	Refer to section 5.3 for details		
Test results:	Pass		


Measurement Record:

Frequency	Level	Modulation	Antenna Polarization	EUT Face	Observations (Performance Criterion)
80 MHz-1 GHz	3 V/m	1 kHz, 80 % Amp. Mod, 1 % increment, dwell time=3seconds	V	Front	A
			H		A
			V	Rear	A
			H		A
			V	Left	A
			H		A
			V	Right	A
			H		A
			V	Top	A
			H		A
			V	Bottom	A
			H		A

Remarks:

Performance Criteria: A, B, C: Refer to section 8.1 for details

8.4 Electrical fast transients

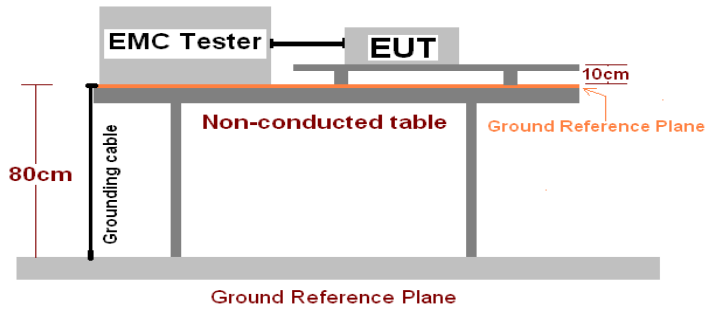Test Requirement:	EN IEC 61547
Test Method:	EN 61000-4-4
Test Level:	1.0kV on AC port
Polarity:	Positive & Negative
Repetition Frequency:	5kHz
Burst Duration:	15ms
Burst Period:	300ms
Test Duration:	2 minute per level & polarity
Performance Criterion:	B
Test setup:	
Test Procedure:	<ol style="list-style-type: none"> 1. The EUT and its simulators were placed on the ground reference plane and were insulated from it by a wood support 0.1m + 0.01m thick. 2. The ground reference plane was 1m*1m metallic sheet with 0.65mm minimum thickness. 3. This reference ground plane was project beyond the EUT by at least 0.1m on all sides and the minimum distance between EUT and all other conductive structure, except the ground plane was more than 0.5m. All cables to the EUT was placed on the wood support, cables not subject to EFT/B was routed as far as possible from the cable under test to minimize the coupling between the cables. 4. The EUT is connected to the power mains through a coupling device that directly couples the EFT/B interference signal. 5. Each of the Line and Neutral conductors is impressed with burst noise for 2 minutes. 6. The length of the signal and power lines between the coupling device and the EUT is 0.5m
Test environment:	Temp.: 26 °C Humid.: 54% Press.: 1012mbar
Test Instruments:	Refer to section 6 for details
Test mode:	Refer to section 5.3 for details
Test results:	Pass




Measurement Record:

Lead under Test	Level (\pmkV)	Coupling Direct/Clamp	Observations (Performance Criterion)	Result
L	± 1.0	Direct	A	Pass
N	± 1.0	Direct	A	Pass
L-N	± 1.0	Direct	A	Pass

Remarks:

Performance Criteria: A, B, C: Refer to section 8.1 for details

8.5 Surges

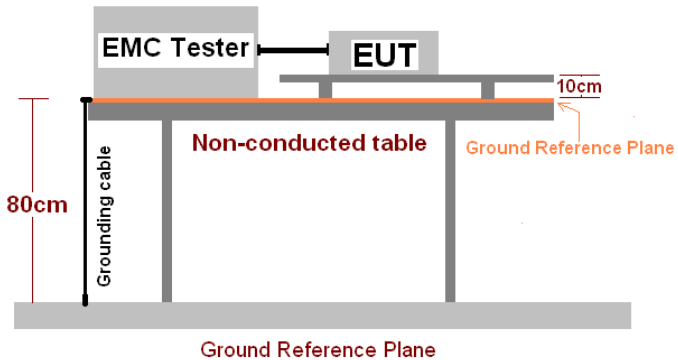Test Requirement:	EN IEC 61547		
Test Method:	EN 61000-4-5		
Test Level:	Test Levels		
	Characteristics	Self-ballasted lamps	Lighting equipment (except self-ballasted lamps ≤ 25W)
	Line to line	±0.5kV	±1kV
	Line to ground	N/A	±2kV
	Note: In addition to the specified test level, all lower test levels as detailed in IEC 61000-4-5 should also be satisfied.		
Polarity:	Positive & Negative		
Generator source impedance:	2Ω (line-line coupling)		
No. of surges:	5 positive at 90°, 5 negative at 270°		
Performance Criterion:	C		
Test setup:			
Test procedure	<ol style="list-style-type: none"> For line-to-line coupling mode, provide a 1.2/50us voltage surge (at open-circuit condition) and 8/20us current surge to EUT selected points, and for active line / neutral lines to ground. At least 5 positive and 5 negative (polarity) tests with a maximum 1/min repetition rate are applied during test. Different phase angles are done individually. Record the EUT operating situation during compliance test and decide the EUT immunity criterion for above each test. 		
Test environment:	Temp.: 26 °C	Humid.: 53%	Press.: 1012mbar
Test Instruments:	Refer to section 6 for details		
Test mode:	Refer to section 5.3 for details		
Test results:	Pass		



Measurement Record:


Location	Level(kV)	Pulse No	Surge Interval	Phase(deg)	Observations (Performance Criterion)	Result
L-N	+1	5	60s	90°	A	Pass
	-1			270°		

Remarks:

Performance Criteria: A, B, C: Refer to section 8.1 for details

EBO assures objectivity and justness of the test, and fulfill the duty of confidentiality for applicant's information. Applicant should undertake responsibility for the authenticity of submitted sample and information. The result(s) shown in this report refer only to the sample(s) tested. The test results only reflect the evaluation of the sample under test and are not authorized for other purposes. EBO do not accept any liability to you for any loss arising out of or in connection with this report, in contract, tort, by statute or otherwise. This report is invalid without signatures of approver and special seal for inspection of EBO, or it has been reproduced in full or part. This report shall not be published as advertisement without the approval of EBO. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. This document is issued by the company under its General Conditions of Service accessible at <http://www.ebotest.com/zjyb/318.html>.

8.6 Conducted Immunity

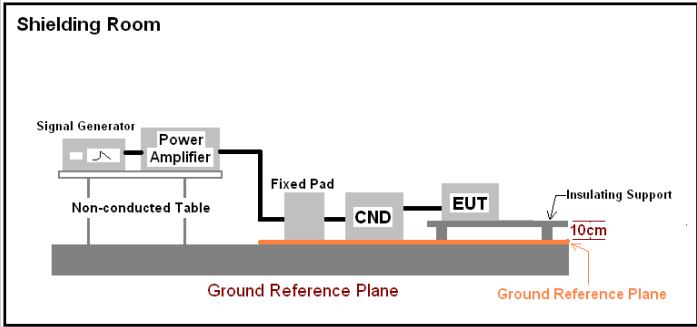Test Requirement:	EN IEC 61547
Test Method:	EN 61000-4-6
Frequency range:	0.15MHz to 80MHz
Test Level:	3V rms on AC Ports (unmodulated emf into 150 Ω)
Modulation:	80%, 1kHz Amplitude Modulation
Performance Criterion:	A
Test setup:	
Test Procedure:	<ol style="list-style-type: none"> 1. The EUT are placed on an insulating support 0.1m high above a ground reference plane. CDN (coupling and decoupling device) is placed on the ground plane about 0.3m from EUT. Cables between CDN and EUT are as short as possible, and their height above the ground reference plane shall be between 30 and 50 mm (where possible). 2. The disturbance signal described below is injected to EUT through CDN. 3. The EUT operates within its operational mode(s) under intended climatic conditions after power on. 4. Recording the EUT operating situation during compliance testing and decide the EUT immunity criterion.
Test environment:	Temp.: 24 °C Humid.: 51% Press.: 1012mbar
Test Instruments:	Refer to section 6 for details
Test mode:	Refer to section 5.3 for details
Test results:	Pass




Measurement Record:

Frequency	Injected Position	Level	Modulation	Observations (Performance Criterion)	Result
150kHz to 80MHz	AC Mains	3Vrms	1 kHz, 80 % Amp. Mod, 1 % increment, dwell time=2seconds	A	Pass

Remark:

Performance Criteria: A, B, C: Refer to section 8.1 for details

8.7 Voltage Dips and Interruptions

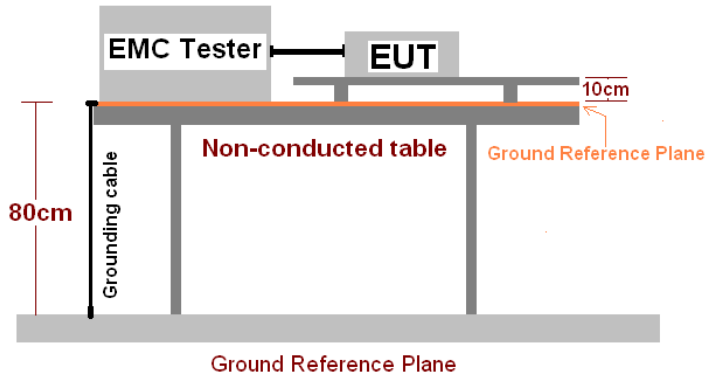Test Requirement:	EN IEC 61547
Test Method:	EN 61000-4-11
Test Level:	0% of U_T (Supply Voltage) for 0.5 Periods 70 % of U_T (Supply Voltage) for 10 Periods
No. of Dips / Interruptions:	3 per Level
Performance Criterion:	100% VD ----Performance criterion: B 30% VD ----Performance criterion: B
Test setup:	
Test Procedure:	<ol style="list-style-type: none"> The EUT and test generator were setup as shown on above setup photo. The interruptions are introduced at selected phase angles with specified duration. Record any degradation of performance.
Test environment:	Temp.: 26 °C Humid.: 53% Press.: 1 012mbar
Test Instruments:	Refer to section 6 for details
Test mode:	Refer to section 5.3 for details
Test results:	Pass


Measurement Record:

Test Level % U_T	Duration (Periods)	Phase angle	No. of drop out	Time between dropout	Observations (Performance Criterion)	Result
0	0.5	0°,90°,180°,270°	3	10s	A	Pass
70	10	0°,90°,180°,270°	3	10s	B	Pass



Remark:

Performance Criteria: A, B, C: Refer to section 8.1 for details


9 EUT Constructional Details

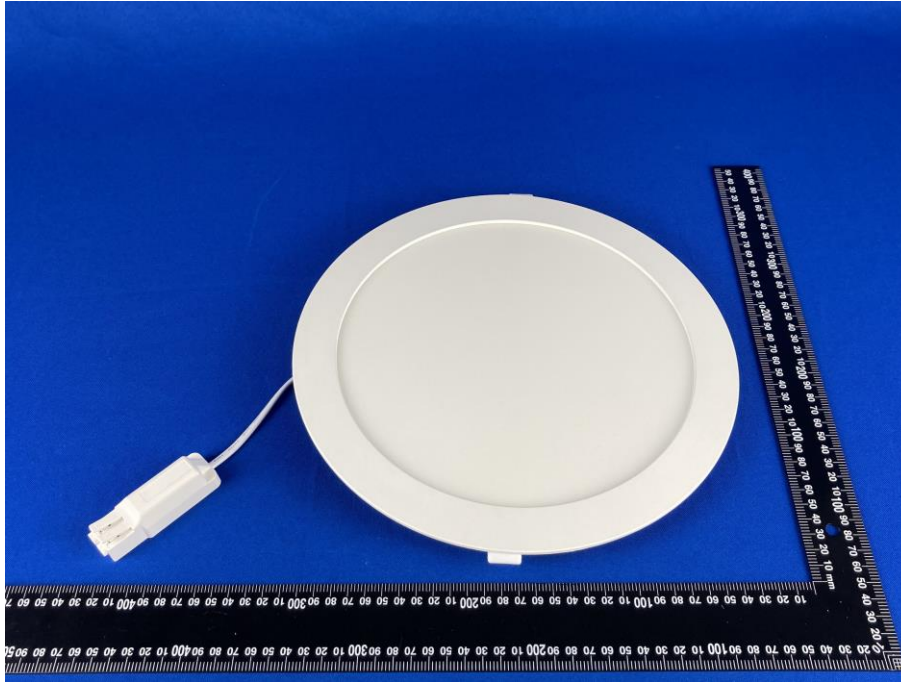

EBO assures objectivity and justness of the test, and fulfill the duty of confidentiality for applicant's information. Applicant should undertake responsibility for the authenticity of submitted sample and information. The result(s) shown in this report refer only to the sample(s) tested. The test results only reflect the evaluation of the sample under test and are not authorized for other purposes. EBO do not accept any liability to you for any loss arising out of or in connection with this report, in contract, tort, by statute or otherwise. This report is invalid without signatures of approver and special seal for inspection of EBO, or it has been reproduced in full or part. This report shall not be published as advertisement without the approval of EBO. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. This document is issued by the company under its General Conditions of Service accessible at <http://www.ebotest.com/zjyb/318.html>.

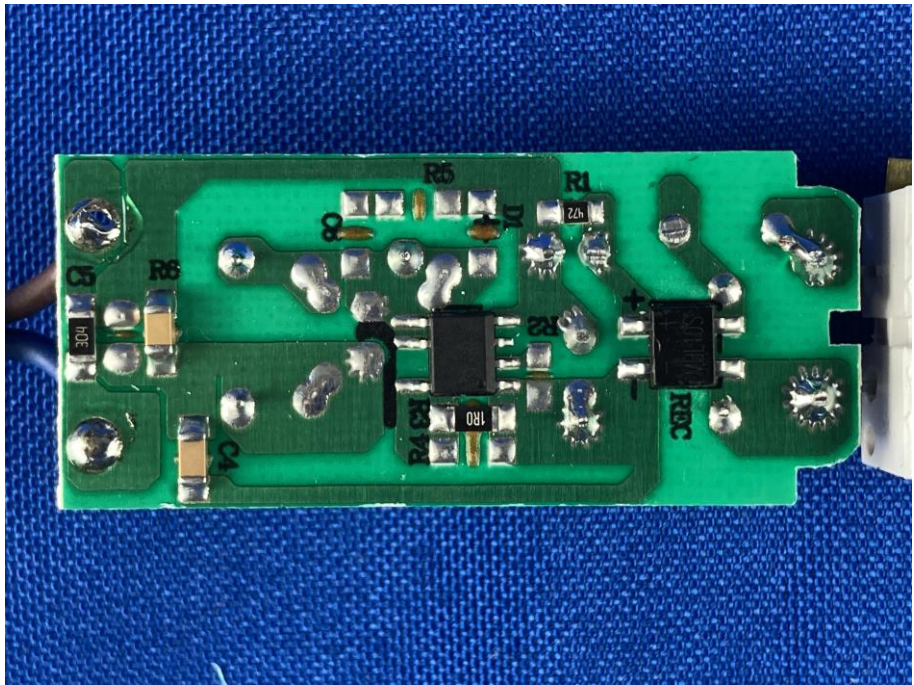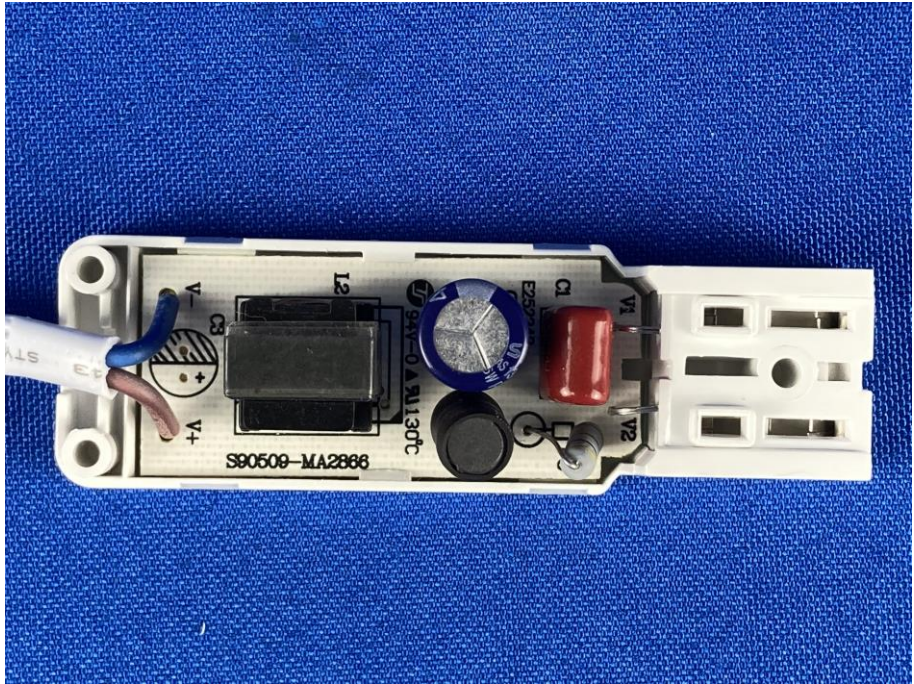

EBO assures objectivity and justness of the test, and fulfill the duty of confidentiality for applicant's information. Applicant should undertake responsibility for the authenticity of submitted sample and information. The result(s) shown in this report refer only to the sample(s) tested. The test results only reflect the evaluation of the sample under test and are not authorized for other purposes. EBO do not accept any liability to you for any loss arising out of or in connection with this report, in contract, tort, by statute or otherwise. This report is invalid without signatures of approver and special seal for inspection of EBO, or it has been reproduced in full or part. This report shall not be published as advertisement without the approval of EBO. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. This document is issued by the company under its General Conditions of Service accessible at <http://www.ebotest.com/zjyb/318.html>.

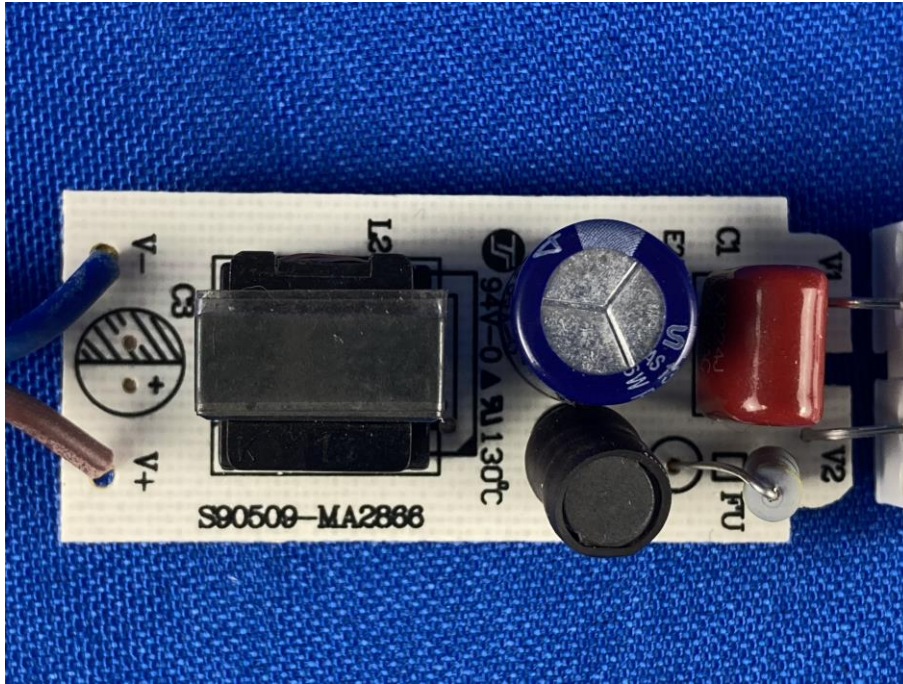

----- End-----