



## BRAYTRON S.R.L

# CE EMC REPORT

Applicant :	BRAYTRON S.R.L  B.DUL IULIU MANIU, NR.616, CORP B, ETAJ 1 SECTOR 6, 061129, BUCHAREST, ROMANIA
Product Name:	LED OUTDOOR LIGHTING FIXTURE
Trade Name:	<b>BRAYTRON</b>
Main Test Model :	BT07-61530
Additional Model:	See Annex B
Prepared By :	BST Testing(Shenzhen) Co., Ltd.  Add:No.7, New Era Industrial Zone, Guantian, Bao'an District, Shenzhen, Guangdong, China
Test Date:	Jan. 12-13, 2022
Date of Report :	Jan.14, 2022
Report No.:	BSTXD220121058901ER



## TABLE OF CONTENTS

<b>TEST REPORT DECLARATION</b> .....	<b>5</b>
<b>1. TEST RESULTS SUMMARY</b> .....	<b>6</b>
<b>2. GENERAL INFORMATION</b> .....	<b>7</b>
2.1. Report information.....	7
2.2. Measurement Uncertainty.....	7
<b>3. PRODUCT DESCRIPTION</b> .....	<b>8</b>
3.1. EUT Description.....	8
3.2. Block Diagram of EUT Configuration.....	8
3.3. Operating Condition of EUT.....	8
3.4. Test Conditions.....	8
3.5. Modifications.....	8
3.6. Abbreviations.....	9
3.7. Performance Criterion.....	9
<b>4. TEST EQUIPMENT USED</b> .....	<b>10</b>
4.1. For Conducted Emission Test.....	10
4.2. For Magnetic Test (In Shielding Room).....	10
4.3. For Radiated Emission Measurement.....	10
4.4. For Harmonic / Flicker Test.....	10
4.5. For Electrostatic Discharge Immunity Test.....	10
4.6. For RF Strength Susceptibility Test.....	11
4.7. For Electrical Fast Transient/Burst Immunity Test.....	11
4.8. For Surge Test.....	11
4.9. For Injected Currents Susceptibility Test.....	11
4.10. For Magnetic Field Immunity Test.....	11
4.11. For Voltage Dips and Interruptions Test.....	11
<b>5. POWER LINE CONDUCTED EMISSION TEST</b> .....	<b>12</b>
5.1. Block Diagram of Test Setup.....	12
5.2. Test Standard.....	12
5.3. Power Line Conducted Emission Limit.....	12
5.4. EUT Configuration on Test.....	12
5.5. Operating Condition of EUT.....	13
5.6. Test Procedure.....	13
5.7. Test Result.....	13
<b>6. MAGNETIC TEST</b> .....	<b>14</b>
6.1. Block Diagram of Test Setup.....	14
6.2. Test Standard.....	14
6.3. Magnetic Field Emission Limits.....	14
6.4. EUT Configuration on Test.....	14
6.5. Operating Condition of EUT.....	14
6.6. Test Procedure.....	15
6.7. Test Results.....	15
<b>7. RADIATED EMISSION TEST</b> .....	<b>16</b>



---

7.1.	Open Site Setup Diagram.....	16
7.2.	Test Standard.....	16
7.3.	Radiated Emission Limit.....	16
7.4.	EUT Configuration on Test.....	16
7.5.	Operating Condition of EUT.....	17
7.6.	Test Procedure.....	17
7.7.	Test Results.....	17
<b>8.</b>	<b>HARMONIC CURRENT EMISSION TEST.....</b>	<b>18</b>
8.1.	Block Diagram of Test Setup.....	18
8.2.	Test Standard.....	18
8.3.	Operating Condition of EUT.....	18
8.4.	Test Procedure.....	18
8.5.	Test Results.....	18
<b>9.</b>	<b>VOLTAGE FLUCTUATIONS &amp; FLICKER TEST.....</b>	<b>20</b>
9.1.	Block Diagram of Test Setup.....	20
9.2.	Test Standard.....	20
9.3.	Operating Condition of EUT.....	20
9.4.	Test Data.....	20
9.5.	Test Results.....	20
<b>10.</b>	<b>ELECTROSTATIC DISCHARGE TEST.....</b>	<b>21</b>
10.1.	Block Diagram of ESD Test Setup.....	21
10.2.	Test Standard.....	21
10.3.	Severity Levels and Performance Criterion.....	21
10.4.	EUT Configuration on Test.....	21
10.5.	Operating Condition of EUT.....	22
10.6.	Test Procedure.....	22
10.7.	Test Results.....	22
<b>11.</b>	<b>RF FIELD STRENGTH SUSCEPTIBILITY TEST.....</b>	<b>24</b>
11.1.	R/S Test Setup.....	24
11.2.	Test Standard.....	24
11.3.	Severity Levels and Performance Criterion.....	24
11.4.	EUT Configuration on Test.....	25
11.5.	Operating Condition of EUT.....	25
11.6.	Test Procedure.....	25
11.7.	Test Results.....	25
<b>12.</b>	<b>ELECTRICAL FAST TRANSIENT/BURST TEST.....</b>	<b>27</b>
12.1.	EFT Test Setup.....	27
12.2.	Test Standard.....	27
12.3.	Severity Levels and Performance Criterion.....	27
12.4.	EUT Configuration on Test.....	27
12.5.	Operating Condition of EUT.....	27
12.6.	Test Procedure.....	28
12.7.	Test Results.....	28
<b>13.</b>	<b>SURGE TEST.....</b>	<b>30</b>
13.1.	Surge Test Setup.....	30
13.2.	Test Standard.....	30
13.3.	Severity Levels and Performance Criterion.....	30

---



---

13.4. EUT Configuration on Test.....	30
13.5. Operating Condition of EUT.....	30
13.6. Test Procedure.....	31
13.7. Test Results.....	31
<b>14. INJECTED CURRENTS SUSCEPTIBILITY TEST.....</b>	<b>33</b>
14.1. Block Diagram of Test AC Mains Setup.....	33
14.2. Test Standard.....	33
14.3. Severity Levels and Performance Criterion.....	33
14.4. EUT Configuration on Test.....	33
14.5. Operating Condition of EUT.....	33
14.6. Test Procedure.....	34
14.7. Test Results.....	34
<b>15. MAGNETIC FIELD IMMUNITY TEST.....</b>	<b>36</b>
15.1. Block Diagram of Test Setup.....	36
15.2. Test Standard.....	36
15.3. Severity Levels and Performance Criterion.....	36
15.4. EUT Configuration on Test.....	36
15.5. Operating Condition of EUT.....	36
15.6. Test Procedure.....	37
15.7. Test Results.....	37
<b>16. VOLTAGE DIPS AND INTERRUPTIONS TEST.....</b>	<b>39</b>
16.1. Voltage Dips and Interruptions Test Setup.....	39
16.2. Test Standard.....	39
16.3. Severity Levels and Performance Criterion.....	39
16.4. EUT Configuration on Test.....	39
16.5. Operating Condition of EUT.....	39
16.6. Test Procedure.....	40
16.7. Test Result.....	40
<b>APPENDIX I.....</b>	<b>42</b>
<b>APPENDIX II.....</b>	<b>47</b>
<b>APPENDIX III.....</b>	<b>51</b>
<b>APPENDIX IV.....</b>	<b>54</b>



## TEST REPORT DECLARATION

Applicant	:	BRAYTRON S.R.L
Address	:	B.DUL IULIU MANIU, NR.616, CORP B, ETAJ 1 SECTOR 6, 061129, BUCHAREST, ROMANIA
EUT Description	:	LED OUTDOOR LIGHTING FIXTURE
Model Number	:	BT07-61530, See Annex B (Note: The series products have the same circuit diagram, PCB layout and functionality. The differences are the appearance, so, we select BT07-61530 to test.)

Test Standards:

- EN 55015:2019/A11:2020
- EN 61547:2009
- EN 61000-3-2:2019/A1:2021
- EN 61000-3-3:2013+A1:2019

The EUT described above is tested by BST Technology Co., Ltd. EMC Laboratory to determine the maximum emissions from the EUT and ensure the EUT to be compliance with the immunity requirements of the EUT. BST Technology Co., Ltd. EMC Laboratory is assumed full responsibility for the accuracy of the test results. Also, this report shows that the EUT technically complies with the 2014/30/EU directive and its amendment requirements.

The test report is valid for above tested sample only and shall not be reproduced in part without written approval of the laboratory.

Prepared by :

Assistant

Reviewer :

Approved & Authorized Signer :

Manager



## 1. TEST RESULTS SUMMARY

Table 1 Test Results Summary

Test Items	Test Results
Power Line Conducted Emission Test	PASS
Magnetic Test	PASS
Radiated Emission	PASS
Harmonic Current Emission Test	PASS
Voltage Fluctuations & Flicker Test	PASS
Electrostatic Discharge Test	PASS
RF Field Strength Susceptibility Test	PASS
Electrical Fast Transient/Burst Test	PASS
Surge Test	PASS
Injected Currents Susceptibility Test	PASS
Magnetic Field Immunity Test	PASS
Voltage Dips And Interruptions Test	PASS



## 2. GENERAL INFORMATION

### 2.1. Report information

- 2.1.1. This report is not a certificate of quality; it only applies to the sample of the specific product/equipment given at the time of its testing. The results are not used to indicate or imply that they are application to the similar items. In addition, such results must not be used to indicate or imply that BST approves recommends or endorses the manufacture, supplier or use of such product/equipment, or that BST in any way guarantees the later performance of the product/equipment.
- 2.1.2. The sample/s mentioned in this report is/are supplied by Applicant, BST therefore assumes no responsibility for the accuracy of information on the brand name, model number, origin of manufacture or any information supplied.
- 2.1.3. Additional copies of the report are available to the Applicant at an additional fee. No third part can obtain a copy of this report through BST, unless the applicant has authorized BST in writing to do so.

### 2.2. Measurement Uncertainty

Available upon request.




### 3. PRODUCT DESCRIPTION

#### 3.1.EUT Description

Description	:	LED OUTDOOR LIGHTING FIXTURE
Applicant	:	BRAYTRON S.R.L B.DUL IULIU MANIU, NR.616, CORP B, ETAJ 1 SECTOR 6, 061129,BUCHAREST,ROMANIA
Manufacturer	:	DEMGRUP INTERNATIONAL LIGHTING LIMITED UNIT D 16/F, ONE CAPITAL PLACE, 18 LUARD ROAD, WAN CHAI, HONG KONG
Model Number	:	BT07-61530, See Annex B(Note:The series products have the same circuit diagram, PCB layout and functionality. The differences are the appearance, so, we select BT07-61530 to test.

#### 3.2.Block Diagram of EUT Configuration



#### 3.3.Operating Condition of EUT

Test mode 1: ON

#### 3.4.Test Conditions

Temperature: 23-26°C

Relative Humidity: 55-68 %

#### 3.5.Modifications

No modification was made.





---

### 3.6. Abbreviations

AC	Alternating Current
AMN	Artificial Mains Network
DC	Direct Current
EM	ElectroMagnetic
EMC	ElectroMagnetic Compatibility
EUT	Equipment Under Test
IF	Intermediate Frequency
RF	Radio Frequency
rms	root mean square
EMI	Electromagnetic Interference
EMS	Electromagnetic Susceptibility

### 3.7. Performance Criterion

**Criterion A:** The equipment shall continue to operate as intended without operator intervention. No degradation of performance or loss of function is allowed below a performance level specified by the manufacturer when the equipment is used as intended.

**Criterion B:** After the test, the equipment shall continue to operate as intended without operator intervention. No degradation of performance or loss of function is allowed, after the application of the phenomena below a performance level specified by the manufacturer, when the equipment is used as intended.

**Criterion C:** Loss of function is allowed, provided the function is self-recoverable, or can be restored by the operation of the controls by the user in accordance with the manufacturer's instructions.



## 4. TEST EQUIPMENT USED

### 4.1. For Conducted Emission Test

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	Test Receiver	Rohde & Schwarz	ESHS30	828985/018	Jun. 01, 22	1 Year
2.	Pulse Limiter	Rohde & Schwarz	ESH3-Z2	100006	Jun. 01, 22	1 Year
3.	L.I.S.N.	Rohde & Schwarz	ESH2-Z5	834549/005	Jun. 01, 22	1 Year
4.	Conical	Emtek	N/A	N/A	N/A	N/A
5.	Voltage Probe	Schwarzbeck	TK9416	N/A	Jun. 01, 22	1 Year
6.	Coaxial Switch	Anritsu	MP59B	6100214550	Jun. 01, 22	1 Year

### 4.2. For Magnetic Test (In Shielding Room)

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	Test Receiver	Rohde & Schwarz	ESHS20	836600/006	Jun. 01, 22	1 Year
2.	Triple-loop Antenna	Rohde & Schwarz	HM020	843885/002	Jun. 01, 22	1 Year
3.	RF Cable	MIYAZAKI	5D-2W	Tri-loop Cable	Sep. 01, 22	1/2 Year
4.	Coaxial Switch	Anritsu	MP59B	M73989	Jun. 01, 22	1/2 Year

### 4.3. For Radiated Emission Measurement

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	Spectrum Analyzer	ANRITSU	MS2661C	6200140915	Jun 01, 22	1 Year
2.	Test Receiver	Rohde&Schwarz	ESC830	828982/018	Jun 01, 22	1 Year
3.	Bilog Antenna	Schwarzbeck	VULB9163	142	Jun 01, 22	1 Year
4.	50 Coaxial Switch	Anritsu Corp	MP59B	6100237248	Jun 01, 22	1 Year
5.	Cable	Schwarzbeck	AK9513	ACRX1	Jun 01, 22	1 Year
6.	Cable	Rosenberger	N/A	FR2RX2	Jun 01, 22	1 Year
7.	Cable	Schwarzbeck	AK9513	CRRX2	Jun 01, 22	1 Year
8.	Cable	Schwarzbeck	AK9513	CRRX2	Jun 01, 22	1 Year
9.	Signal Generator	HP	864A	3625U00573	Jun 01, 22	1 Year

### 4.4. For Harmonic / Flicker Test

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	Power Frequency test system	HAEFELY	PHF555	080419-03	Jun. 01, 22	1 Year

### 4.5. For Electrostatic Discharge Immunity Test

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	ESD Tester	HAEFELY	PSD 1600	H911'292	Jun. 01, 22	1 Year



#### 4.6.For RF Strength Susceptibility Test

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	Signal Generator	HP	8648A	3633A02081	Jun. 01, 22	1 Year
2.	Amplifier	A&R	500A100	17034	NCR	NCR
3.	Amplifier	A&R	100W/1000M1	17028	NCR	NCR
4.	Isotropic Field Monitor	A&R	FM2000	16829	NCR	NCR
5.	Isotropic Field Probe	A&R	FLW220100	16755	Jun. 01, 22	1 Year
6.	Biconic Antenna	EMCO	3108	9507-2534	NCR	NCR
7.	Log-periodic Antenna	A&R	AT1080	16812	NCR	NCR
8.	PC	N/A	486DX2	N/A	N/A	N/A

#### 4.7.For Electrical Fast Transient/Burst Immunity Test

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	Burst Tester	HAEFELY	PEFT 4010	080981-16	Jun. 01, 22	1 Year

#### 4.8.For Surge Test

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	Surge Tester	HAEFELY	PSURGE4.1	080107-04	Jun. 01, 22	1 Year

#### 4.9.For Injected Currents Susceptibility Test

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	Simulator	EMTEST	CWS 500C	0900-12	Jun. 01, 22	1 Year
2.	CDN	EMTEST	CDN-M2	510010010010	Jun. 01, 22	1 Year
3.	VDN	EMTEST	CDN-M3	0900-11	Jun. 01, 22	1 Year
4.	Injection Clamp	EMTEST	F-2031-23MM	368	Jun. 01, 22	1 Year
5.	Attenuator	EMTEST	ATT6	0010222a	Jun. 01, 22	1 Year

#### 4.10.For Magnetic Field Immunity Test

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	Magnetic Field Tester	HEAFELY	MAG100.1	083858-10	Jun. 01, 22	1 Year


#### 4.11.For Voltage Dips and Interruptions Test

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
2.	Dips Tester	HEAFELY	PLINE 1610	083732-18	Jun. 01, 22	1 Year



## 5. POWER LINE CONDUCTED EMISSION TEST

### 5.1. Block Diagram of Test Setup

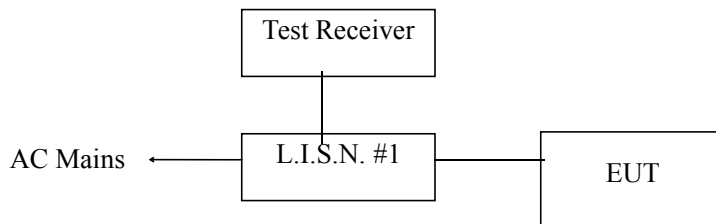

### 5.2. Test Standard

EN 55015:2019/A11:2020

### 5.3. Power Line Conducted Emission Limit

Frequency	At mains terminals (dB $\mu$ V)	
	Quasi-peak Level	Average Level
9KHz ~ 50KHz	110	--
50KHz ~ 150KHz	90 ~ 80*	--
150KHz ~ 0.5MHz	66 ~ 56*	56 ~ 46*
0.5MHz ~ 2.51MHz	56	46
2.51MHz ~ 3.0MHz	73	63
3.0MHz ~ 5.0MHz	56	46
5.0MHz ~ 30MHz	60	50

1. At the transition frequency the lower limit applies.
2. \* decreasing linearly with logarithm of the frequency.

### 5.4. EUT Configuration on Test

The following equipments are installed on conducted emission test to meet EN55015 requirement and operating in a manner, which tends to maximize its emission characteristics in a normal application.

#### 5.4.1. EUT Information

Model Number : BT07-61530  
 Manufacturer : DEMGRUP INTERNATIONAL LIGHTING LIMITED



## 5.5. Operating Condition of EUT

- 5.5.1. Setup the EUT and simulators as shown in Section 5.1.
- 5.5.2. Turn on the power of all equipments.
- 5.5.3. Let the EUT work in test mode (ON) and test it.

## 5.6. Test Procedure

The EUT is put on the table which is 0.8 meter high above the ground and connected to the AC mains through a Line Impedance Stabilization Network (L.I.S.N.). This provided a 50ohm coupling impedance for the tested equipments. Both sides of AC line are checked to find out the maximum conducted emission according to the EN55015 regulations during conducted emission test. And the voltage probe had been used for the load terminals test according to the EN55015 standard.

The bandwidth of the test receiver (R&S ESHS20) is set at 10KHz. in 150KHz~30MHz and 200Hz bandwidth in 9KHz~150KHz.

The frequency range from 9KHz to 30MHz is checked.


All the test results are listed in Section 5.7. The scanning waveform is put in **Appendix I**.

## 5.7. Test Result

**PASS.**

## 6. MAGNETIC TEST

### 6.1. Block Diagram of Test Setup

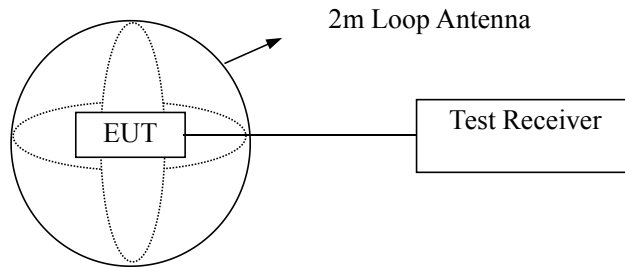

(EUT: LED OUTDOOR LIGHTING FIXTURE )

### 6.2. Test Standard

EN 55015:2019/A11:2020

### 6.3. Magnetic Field Emission Limits

Frequency	Limits for loop diameter (dB $\mu$ A)
	2m
9KHz ~ 70KHz	88
70KHz ~ 150KHz	88 ~ 58*
150KHz ~ 2.2MHz	58 ~ 26*
2.2MHz ~ 3.0MHz	58
3.0MHz ~ 30MHz	22

1. At the transition frequency the lower limit applies.
2. \* decreasing linearly with logarithm of the frequency.

### 6.4. EUT Configuration on Test

The configuration of the EUT is same as Section 3.2..

### 6.5. Operating Condition of EUT

- 6.5.1. Setup the EUT as shown in Section 6.1.
- 6.5.2. Turn on the power of all equipments.
- 6.5.3. Let the EUT work in test mode (ON) and test it.



## 6.6. Test Procedure

The EUT is placed on a wood table in the center of a loop antenna. The induced current in the loop antenna is measured by means of a current probe and the test receiver. Three field components is checked by means of a coax switch.

The frequency range from 9KHz to 30MHz is investigated. The receiver is measured with the quasi-peak detector. For frequency band 9KHz to 150KHz, the bandwidth of the field strength meter (R&S test receiver ESHS20) is set at 200Hz. For frequency band 150KHz to 30MHz, the bandwidth is set at 10KHz.

All the test results are listed in Section 6.7. and all the scanning waveform is put in **Appendix II**.


## 6.7. Test Results

**PASS.**

The frequency range from 9KHz to 30MHz is investigated. As the peak value is too low against the limit, so the Quasi-peak value has been omitted.

## 7. RADIATED EMISSION TEST

### 7.1. Open Site Setup Diagram

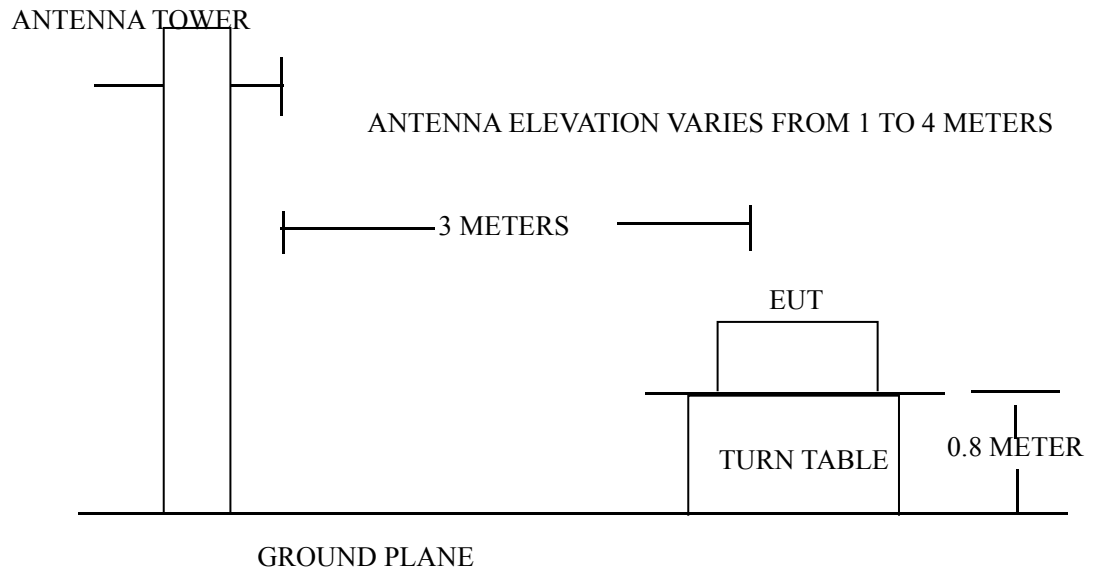

### 7.2. Test Standard

EN 55015:2019/A11:2020

### 7.3. Radiated Emission Limit

All emanations from a computing devices or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified below:

FREQUENCY (MHz)	DISTANCE (Meters)	FIELD STRENGTHS LIMITS (dB $\mu$ V/m)
30 ~ 230	3	40
230 ~ 300	3	47

- Note: (1) The tighter limit shall apply at the edge between two frequency bands.  
 (2) Distance refers to the distance in meters between the measuring instruments antenna and the closed point of any part of the EUT.

### 7.4. EUT Configuration on Test

The EN55015 regulations test method must be used to find the maximum emission during radiated emission test.





## 7.5. Operating Condition of EUT

- 7.5.1. Setup the EUT as shown on Section 7.1.
- 7.5.2. Turn on the power of all equipments.
- 7.5.3. Let the EUT work in test mode (ON) and test it.

## 7.6. Test Procedure

The EUT is placed on a turn table which is 0.8 meter above ground. The turn table can rotate 360 degrees to determine the position of the maximum emission level. The EUT is set 3 meters away from the receiving antenna which is mounted on a antenna tower. The antenna can move up and down between 1 to 4 meters to find out the maximum emission level. Broadband antenna (calibrated by dipole antenna) are used as a receiving antenna. Both horizontal and vertical polarization of the antenna are set on test. The bandwidth setting on the test receiver (R&S TEST RECEIVER ESCS20) is 120 KHz. The EUT is tested in Semi-Anechoic Chamber. and all the scanning waveform is put in **Appendix III.**


## 7.7. Test Results

**PASS.**



## 8. HARMONIC CURRENT EMISSION TEST

### 8.1. Block Diagram of Test Setup

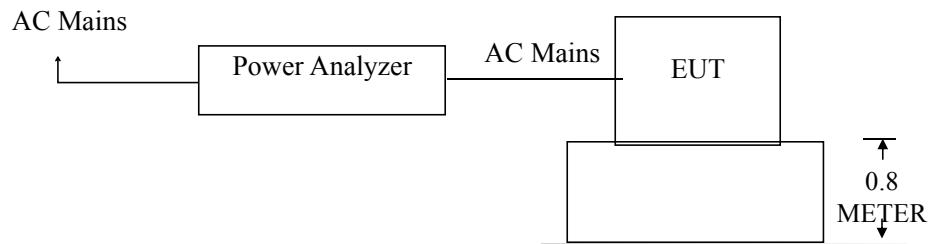

(EUT: LED OUTDOOR LIGHTING FIXTURE )

### 8.2. Test Standard

EN 61000-3-2:2019/A1:2021

Class C

### 8.3. Operating Condition of EUT

- 8.3.1. Setup the EUT as shown in Section 8.1.
- 8.3.2. Turn on the power of all equipments.
- 8.3.3. Let the EUT work in test mode (ON) and test it.

### 8.4. Test Procedure

The power cord of the EUT is connected to the output of the test system. Turn on the Power of the EUT and use the test system to test the harmonic current level.

### 8.5. Test Results

**PASS.**

**Average harmonic current results**

Hn	I <sub>eff</sub> [A]	I <sub>eff</sub> [%]	Limit [%]	Result
2	643.854E-6	0.308	2.00	PASS
3	34.646E-3	16.574	28.78	PASS
4	585.303E-6	0.280		PASS
5	1.618E-3	0.774	10.00	PASS
6	627.926E-6	0.300		PASS
7	13.165E-3	6.298	7.00	PASS
8	585.277E-6	0.280		PASS
9	2.347E-3	1.123	5.00	PASS
10	577.112E-6	0.276		PASS
11	8.990E-3	2.901	3.00	PASS
12	606.176E-6	0.290		PASS
13	770.152E-6	0.368	3.00	PASS
14	918.463E-6	0.439		PASS
15	5.977E-3	2.859	3.00	PASS
16	568.535E-6	0.272		PASS
17	2.112E-3	1.010	3.00	PASS
18	632.016E-6	0.302		PASS
19	4.910E-3	2.349	3.00	PASS
20	646.103E-6	0.309		PASS
21	3.480E-3	1.665	3.00	PASS
22	614.498E-6	0.294		PASS
23	2.163E-3	1.035	3.00	PASS
24	578.800E-6	0.277		PASS
25	2.539E-3	1.215	3.00	PASS
26	660.642E-6	0.316		PASS
27	1.810E-3	0.866	3.00	PASS
28	630.027E-6	0.301		PASS
29	1.330E-3	0.636	3.00	PASS
30	573.405E-6	0.274		PASS
31	829.468E-6	0.397	3.00	PASS
32	618.478E-6	0.296		PASS
33	955.132E-6	0.457	3.00	PASS
34	636.128E-6	0.304		PASS
35	1.500E-3	0.717	3.00	PASS
36	576.647E-6	0.276		PASS
37	958.335E-6	0.458	3.00	PASS
38	588.266E-6	0.281		PASS
39	1.361E-3	0.651	3.00	PASS
40	647.027E-6	0.310		PASS



## 9. VOLTAGE FLUCTUATIONS & FLICKER TEST

### 9.1. Block Diagram of Test Setup

Same as Section 7.1..

### 9.2. Test Standard

EN61000-3-3:2013+A1:2019

### 9.3. Operating Condition of EUT

Same as Section 7.3.. The power cord of the EUT is connected to the output of the test system. Turn on the power of the EUT and use the test system to test the harmonic current level.

Flicker Test Limit

Test items	Limits
Pst	1.0
dc	3.3%
dmax	4.0%
dt	Not exceed 3.3% for 500ms

### 9.4. Test Data

Flicker test Data

Model No.:BT07-61530		
Test Mode: 1		
Items	Reading	Limit
dmax	0.01	4.0%
dc	0.03	3.3%
dt	0.05	Not exceed 3.3% for 500ms
Pst	0.001	1.0


### 9.5. Test Results

**PASS.**



## 10. ELECTROSTATIC DISCHARGE TEST

### 10.1. Block Diagram of ESD Test Setup

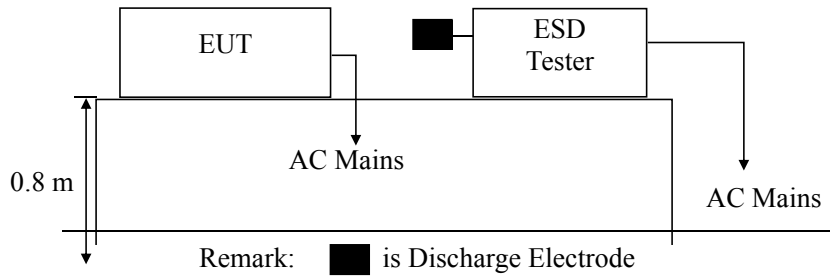

### 10.2. Test Standard

EN61547:2009 (EN61000-4-2:2009)  
Severity Level 3 for Air Discharge at 8KV  
Severity Level 2 for Contact Discharge at 4KV

### 10.3. Severity Levels and Performance Criterion

#### 10.3.1. Severity level

Level	Test Voltage Contact Discharge (KV)	Test Voltage Air Discharge (KV)
1.	2	2
2.	4	4
3.	6	8
4.	8	15
X.	Special	Special

#### 10.3.2. Performance criterion: B

### 10.4. EUT Configuration on Test

The configuration of EUT are listed in Section 3.2.



## 10.5. Operating Condition of EUT

- 10.5.1. Setup the EUT as shown in Section 10.1.
- 10.5.2. Turn on the power of all equipments.
- 10.5.3. Let the EUT work in test mode (ON) and test it.

## 10.6. Test Procedure

### 10.6.1. Air Discharge:

This test is done on a non-conductive surfaces. The round discharge tip of the discharge electrode shall be approached as fast as possible to touch the EUT. After each discharge, the discharge electrode shall be removed from the EUT. The generator is then re-triggered for a new single discharge and repeated 10 times for each pre-selected test point. This procedure shall be repeated until all the air discharge completed.

### 10.6.2. Contact Discharge:

All the procedure shall be same as Section 10.6.1. except that the tip of the discharge electrode shall touch the EUT before the discharge switch is operated.

### 10.6.3. Indirect discharge for horizontal coupling plane

At least 20 single discharges shall be applied to the horizontal coupling plane, at points on each side of the EUT. The discharge electrode positions vertically at a distance of 0.1m from the EUT and with the discharge electrode touching the coupling plane.

### 10.6.4. Indirect discharge for vertical coupling plane

At least 20 single discharge shall be applied to the center of one vertical edge of the coupling plane. The coupling plane, of dimensions 0.5m X 0.5m, is placed parallel to, and positioned at a distance of 0.1m from the EUT. Discharges shall be applied to the coupling plane, with this plane in sufficient different positions that the four faces of the EUT are completely illuminated.

## 10.7. Test Results

**PASS.**



## Electrostatic Discharge Test Results


BST Testing(Shenzhen) Co., Ltd.

<i>Applicant</i> : BRAYTRON S.R.L	<i>Test Date</i> : Jan. 13,2022	
<i>EUT</i> : LED OUTDOOR LIGHTING FIXTURE	<i>Temperature</i> : 22 °C	
<i>M/N</i> : BT07-61530	<i>Humidity</i> : 50 %	
<i>Power Supply</i> : AC220-240V,50/60Hz	<i>Test Mode</i> : ON	
<i>Air Discharge: ±8KV For each point positive 10 times and negative 10 times discharge.</i>		
<i>Contact Discharge: ±4KV</i>		
<i>Location</i>	<i>Kind</i> <i>A-Air Discharge</i> <i>C-Contact Discharge</i>	<i>Result</i>
<i>Slots</i>	<i>A</i>	<i>PASS</i>
<i>Metal Parts</i>	<i>C</i>	<i>PASS</i>
<i>HCP</i>	<i>C</i>	<i>PASS</i>
<i>VCP</i>	<i>C</i>	<i>PASS</i>

*Discharge should be considered on Contact and Air and Horizontal Coupling Plane (HCP) and Vertical Coupling Plane (VCP).*

## 11. RF FIELD STRENGTH SUSCEPTIBILITY TEST

### 11.1.R/S Test Setup

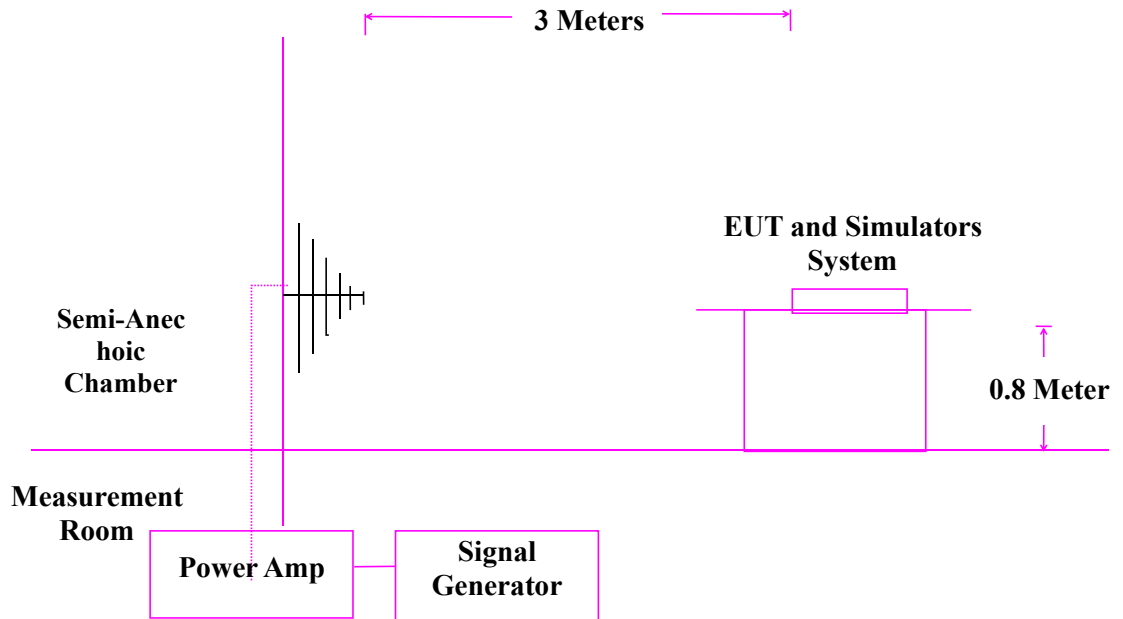

### 11.2. Test Standard

EN61547:2009 (EN61000-4-3:2006)  
Severity Level 2 at 3V / m

### 11.3. Severity Levels and Performance Criterion

#### 11.3.1. Severity level

Level	Field Strength V/m
1.	1
2.	3
3.	10
X.	Special

#### 11.3.2. Performance criterion : A





#### 11.4.EUT Configuration on Test

The configuration of EUT are listed in Section 3.2.

#### 11.5.Operating Condition of EUT

Setup the EUT as shown in Section 11.1.. The operating condition of EUT are listed in section 3.3.

#### 11.6.Test Procedure

The EUT and its simulators are placed on a turn table which is 0.8 meter above the ground. The EUT is set 3 meters away from the transmitting antenna which is mounted on an antenna tower. Both horizontal and vertical polarization of the antenna are set on test. Each of the four sides of EUT must be faced this transmitting antenna and measured individually. In order to judge the EUT performance, a CCD camera is used to monitor the EUT. All the scanning conditions are as follows :

Condition of Test	Remarks
1. Fielded Strength	3 V/m (Severity Level 2)
2. Radiated Signal	Modulated
3. Scanning Frequency	80 - 1000 MHz, 1.4GHz-2.7GHz
4. Sweeping time of radiated	0.0015 decade/s
5. Dwell Time	1 Sec.

#### 11.7.Test Results

**PASS.**

Please refer to the following page.



## RF Field Strength Susceptibility Test Results


BST Testing(Shenzhen) Co., Ltd.

<i>Applicant</i> : BRAYTRON S.R.L	<i>Test Date</i> : Jan. 13,2022
<i>EUT</i> : LED OUTDOOR LIGHTING FIXTURE	<i>Temperature</i> : 22 °C
<i>M/N</i> : BT07-61530	<i>Humidity</i> : 50 %
<i>Power Supply</i> : AC220-240V,50/60Hz	<i>Test Mode</i> : ON
<i>Frequency Range</i> : 80 MHz to 1000 MHz, 1.4GHz-2.7GHz	
<i>Modulation</i> : <input checked="" type="checkbox"/> AM <input type="checkbox"/> Pulse <input type="checkbox"/> none 1 KHz 80%	
<i>Criterion</i> : A	
	<i>Frequency Rang</i> : 80-1000MHZ, 1.4GHz-2.7GHz
<i>Steps</i>	1% <span style="margin-left: 100px;">1%</span>
	<i>Horizontal</i> <span style="margin-left: 100px;"><i>Vertical</i></span>
<i>Front</i>	<i>Pass</i> <span style="margin-left: 100px;"><i>Pass</i></span>
<i>Right</i>	<i>Pass</i> <span style="margin-left: 100px;"><i>Pass</i></span>
<i>Rear</i>	<i>Pass</i> <span style="margin-left: 100px;"><i>Pass</i></span>
<i>Left</i>	<i>Pass</i> <span style="margin-left: 100px;"><i>Pass</i></span>



## 12. ELECTRICAL FAST TRANSIENT/BURST TEST

### 12.1. EFT Test Setup

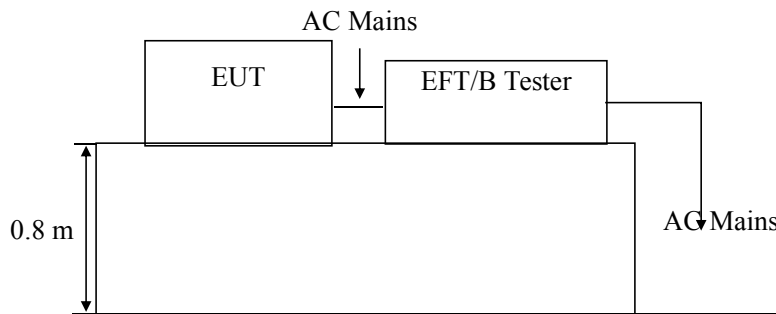

### 12.2. Test Standard

EN61547:2009 (EN61000-4-4:2012)  
Severity Level 2 at 1KV

### 12.3. Severity Levels and Performance Criterion

#### 12.3.1. Severity level

Level	Open Circuit Output Test Voltage $\pm 10\%$	
	On Power Supply Lines	On I/O (Input/Output) Signal data and control lines
1.	0.5 KV	0.25 KV
2.	1 KV	0.5 KV
3.	2 KV	1 KV
4.	4 KV	2 KV
X	Special	Special

#### 12.3.2. Performance criterion : B

### 12.4. EUT Configuration on Test

The configuration of EUT are listed in Section 3.2..

### 12.5. Operating Condition of EUT

Setup the EUT as shown in Section 12.1.. The operating condition of EUT are listed in section 3.3.



## 12.6. Test Procedure

The EUT is put on the table which is 0.8 meter high above the ground. This reference ground plane shall project beyond the EUT by at least 0.1m on all sides and the minimum distance between the EUT and all other conductive structure, except the ground plane beneath the EUT, shall be more than 0.5m.

### 12.6.1. For input and output AC power ports:

The EUT is connected to the power mains by using a coupling device which couples the EFT interference signal to AC power lines. Both polarities of the test voltage should be applied during compliance test and the duration of the test is 2 mins.

### 12.6.2. For signal lines and control lines ports:

It's unnecessary to test.

### 12.6.3. For DC output line ports:

It's unnecessary to test.

## 12.7. Test Results

**PASS.**

Please refer to the following page.




## Electrical Fast Transient/Burst Test Results

BST Testing(Shenzhen) Co., Ltd.

<i>Applicant</i>	: BRAYTRON S.R.L	<i>Test Date</i>	: Jan. 13,2022						
<i>EUT</i>	: LED OUTDOOR LIGHTING FIXTURE	<i>Temperature</i>	: 22 °C						
<i>M/N</i>	: BT07-61530	<i>Humidity</i>	: 50 %						
<i>Power Supply</i>	: AC220-240V,50/60Hz	<i>Test Mode</i>	: ON						
<i>Inject Place : AC Mains</i>									
<i>Inject Line</i>	<i>Voltage KV</i>	<i>Inject Time(s)</i>	<i>Inject Method</i>	<i>Results</i>	<i>Inject Line</i>	<i>Voltage KV</i>	<i>Inject Time(s)</i>	<i>Inject Method</i>	<i>Results</i>
L	±1	120	Direct	PASS					
N	±1	120	Direct	PASS					
L N	±1	120	Direct	PASS					

## 13.SURGE TEST

### 13.1.Surge Test Setup

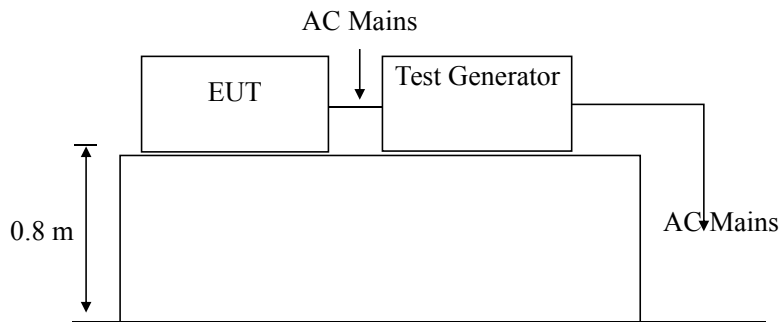

### 13.2.Test Standard

EN61547:2009 (EN61000-4-5:2014)  
Severity Level 2 for Line to Neutral at 1.0KV

### 13.3.Severity Levels and Performance Criterion

#### 13.3.1.Severity level

Severity Level	Open-Circuit Test Voltage KV
1	0.5
2	1.0
3	2.0
4	4.0
*	Special

Performance criterion : **B**

### 13.4.EUT Configuration on Test

The configuration of EUT are listed in Section 3.2.

### 13.5.Operating Condition of EUT

13.5.1.Setup the EUT as shown in Section 13.1..

13.5.2.Turn on the power of all equipments.

13.5.3.Let the EUT work in test mode (ON) and test it..



### 13.6.Test Procedure

- 1) Set up the EUT and test generator as shown on Section 13.1
- 2) For line to line coupling mode, provide a 1KV 1.2/50us voltage surge (at open-circuit condition) and 8/20us current surge to EUT selected points.
- 3) At least 5 positive and 5 negative (polarity) tests with a maximum 1/min repetition rate are conducted during test.
- 4) Different phase angles are done individually.
- 5) Record the EUT operating situation during compliance test and decide the EUT immunity criterion for above each test.

### 13.7.Test Results

**PASS.**

Please refer to the following page.



## Surge Immunity Test Results


BST Testing(Shenzhen) Co., Ltd.

<i>Applicant</i> : BRAYTRON S.R.L				<i>Test Date</i> : Jan. 13,2022	
<i>EUT</i> : LED OUTDOOR LIGHTING FIXTURE				<i>Temperature</i> : 22 °C	
<i>M/N</i> : BT07-61530				<i>Humidity</i> : 50 %	
<i>Power Supply</i> : AC220-240V,50/60Hz				<i>Test Mode</i> : ON	
<i>Location</i>	<i>Polarity</i>	<i>Phase Angle</i>	<i>No of Pulse</i>	<i>Pulse Voltage (KV)</i>	<i>Result</i>
L-N	+	0	5	1.0	PASS
	+	90	5	1.0	PASS
	+	180	5	1.0	PASS
	+	270	5	1.0	PASS
	-	0	5	1.0	PASS
	-	90	5	1.0	PASS
	-	180	5	1.0	PASS
	-	270	5	1.0	PASS



## 14. INJECTED CURRENTS SUSCEPTIBILITY TEST

### 14.1. Block Diagram of Test AC Mains Setup

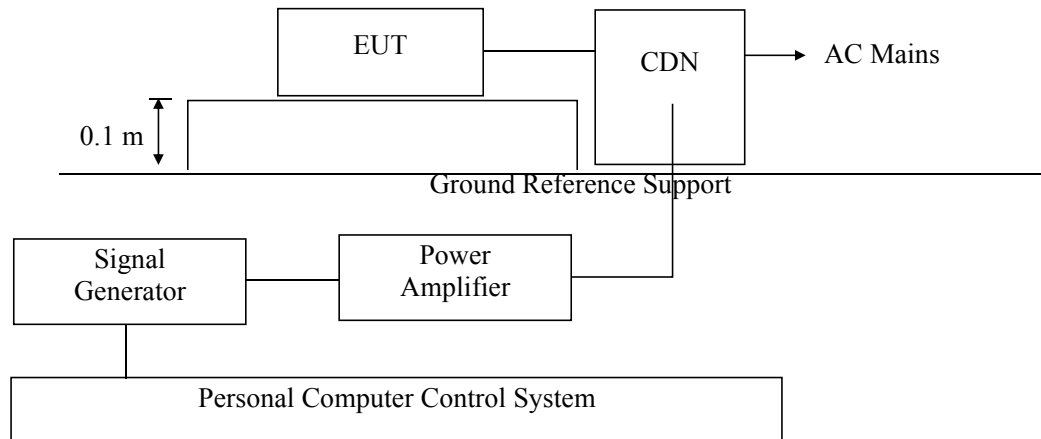

### 14.2. Test Standard

EN61547:2009 (EN61000-4-6: 2014)  
Severity Level 2 at 3 V (rms), 0.15MHz ~ 80MHz

### 14.3. Severity Levels and Performance Criterion

#### 14.3.1. Severity level

Level	Field Strength V/m
1.	1
2.	3
3.	10
X	Special

#### 14.3.2. Performance criterion: A

### 14.4. EUT Configuration on Test

The configuration of EUT are listed in Section 3.2.

### 14.5. Operating Condition of EUT

Setup the EUT as shown in Section 14.1.. The operating condition of EUT are listed in section 3.3.



#### 14.6. Test Procedure

- 1) Set up the EUT, CDN and test generators as shown on Section 14.1.
- 2) Let the EUT work in test mode and test it.
- 3) The EUT are placed on an insulating support 0.8m high above a ground reference plane. CDN (coupling and decoupling device) is placed on the ground plane about 0.3m from EUT. Cables between CDN and EUT are as short as possible, and their height above the ground reference plane shall be between 30 and 50 mm (where possible).
- 4) The disturbance signal described below is injected to EUT through CDN.
- 5) The EUT operates within its operational mode(s) under intended climatic conditions after power on.
- 6) The frequency range is swept from 150KHz to 80MHz using 3V signal level, and with the disturbance signal 80% amplitude modulated with a 1KHz sine wave.
- 7) The rate of sweep shall not exceed  $1.5 \cdot 10^{-3}$  decades/s. Where the frequency is swept incrementally, the step size shall not exceed 1% of the start and thereafter 1% of the preceding frequency value.
- 8) Recording the EUT operating situation during compliance testing and decide the EUT immunity criterion.

#### 14.7. Test Results

**PASS.**

Please refer to the following page.




## Injected Currents Susceptibility Test Results

BST Testing(Shenzhen) Co., Ltd.

<i>Applicant</i> : BRAYTRON S.R.L		<i>Test Date</i> : Jan. 13,2022		
<i>EUT</i> : LED OUTDOOR LIGHTING FIXTURE		<i>Temperature</i> : 22 °C		
<i>M/N</i> : BT07-61530		<i>Humidity</i> : 50 %		
<i>Power Supply</i> : AC220-240V,50/60Hz		<i>Test Mode</i> : ON		
<i>Frequency Range (MHz)</i>	<i>Injected Position</i>	<i>Strength</i>	<i>Criterion</i>	<i>Result</i>
0.15 ~ 20	AC Line	3V(rms), Unmodulated	A	PASS
20 ~ 80	AC Line	3V(rms), Unmodulated	A	PASS
		<i>Note:</i>		

## 15. MAGNETIC FIELD IMMUNITY TEST

### 15.1. Block Diagram of Test Setup

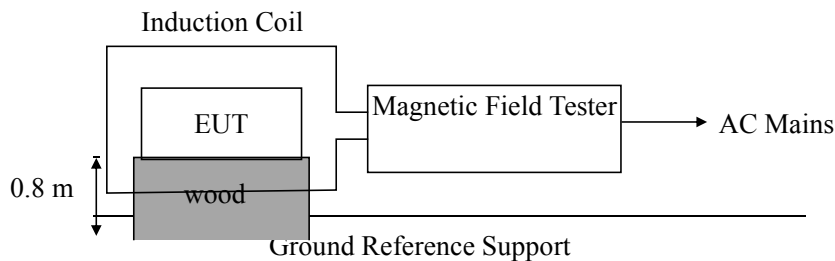

### 15.2. Test Standard

EN61547:2009 (EN61000-4-8: 2010)

Severity Level 2 at 3A/m

### 15.3. Severity Levels and Performance Criterion

#### 15.3.1. Severity level

Level	Magnetic Field Strength A/m
1.	1
1.	3
2.	10
3.	30
4.	100
X.	Special

#### 15.3.2. Performance criterion : A

### 15.4. EUT Configuration on Test

The configuration of EUT are listed in Section 3.2.

### 15.5. Operating Condition of EUT

15.5.1. Setup the EUT as shown in Section 15.1

15.5.2. Turn on the power of all equipments.

15.5.3. Let the EUT work in test mode (ON) and test it.



## 15.6. Test Procedure

The EUT shall be subjected to the test magnetic field by using the induction coil of standard dimensions (1m\*1m) and shown in Section 15.1. The induction coil shall then be rotated by 90° in order to expose the EUT to the test field with different orientations.

## 15.7. Test Results

**PASS.**

Please refer to the following page.




## Magnetic Field Immunity Test Results

Shenzhen BST Technology Co.,Ltd.

<i>Applicant : BRAYTRON S.R.L</i>		<i>Test Date : Jan. 13,2022</i>		
<i>EUT : LED OUTDOOR LIGHTING FIXTURE</i>		<i>Temperature : 22 °C</i>		
<i>M/N : BT07-61530</i>		<i>Humidity : 60 %</i>		
<i>Power Supply : AC220-240V,50/60Hz</i>				
<i>Test Mode: ON</i>				
<i>Test Level</i>	<i>Testing Duration</i>	<i>Coil Orientation</i>	<i>Criterion</i>	<i>Result</i>
<i>3A/M</i>	<i>5 mins</i>	<i>Horizontal</i>	<i>A</i>	<i>PASS</i>
<i>3A/M</i>	<i>5 mins</i>	<i>Vertical</i>	<i>A</i>	<i>PASS</i>
<i>Remark:</i>		<i>Test Equipment : Magnetic Field Tester MAG100.1</i>		

## 16. VOLTAGE DIPS AND INTERRUPTIONS TEST

### 16.1. Voltage Dips and Interruptions Test Setup

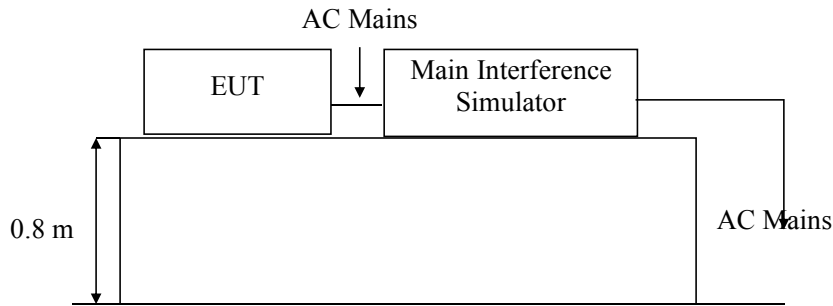

Remark: Combination wave generator and decoupling network are included in test generator.

### 16.2. Test Standard

EN61547:2009 (EN61000-4-11:2004)

### 16.3. Severity Levels and Performance Criterion

#### 16.3.1. Severity level

Test Level %U <sub>T</sub>	Voltage dip and short interruptions %U <sub>T</sub>	Duration (in period)
0	100	250p
40	60	5p
70	30	0.5p

#### 16.3.2. Performance criterion : C&B

### 16.4. EUT Configuration on Test

The configuration of EUT are listed in Section 3.2.

### 16.5. Operating Condition of EUT

16.5.1. Setup the EUT as shown in Section 16.1..

16.5.2. Turn on the power of all equipments.

16.5.3. Let the EUT work in test mode (ON) and test it.



## 16.6. Test Procedure

- 1) Set up the EUT and test generator as shown on Section 16.1.
- 2) The interruptions is introduced at selected phase angles with specified duration.
- 3) Record any degradation of performance.

## 16.7. Test Result

**PASS.**

Please refer to the following page.






## Voltage Dips And Interruptions Test Results

Shenzhen BST Technology Co., Ltd

<i>Applicant : BRAYTRON S.R.L</i>			<i>Test Date : Jan. 13,2022</i>		
<i>EUT : LED OUTDOOR LIGHTING FIXTURE</i>			<i>Temperature : 22 °C</i>		
<i>M/N :BT07-61530</i>			<i>Humidity : 64 %</i>		
<i>Power Supply : AC220-240V,50/60Hz</i>					
<i>Test Mode: ON</i>					
<i>Test Level % U<sub>T</sub></i>	<i>Voltage Dips &amp; Short Interruptions % U<sub>T</sub></i>	<i>Duration (in period)</i>	<i>Phase Angle</i>	<i>Criterion</i>	<i>Result</i>
<i>70</i>	<i>30</i>	<i>10P</i>	<i>90°</i>	<i>C</i>	<i>PASS</i>
<i>0</i>	<i>100</i>	<i>0.5P</i>	<i>180°</i>	<i>B</i>	<i>PASS</i>
<i>Remark: U<sub>T</sub> is the rated voltage for the equipment.</i>			<i>Test Equipment : Main Interference Simulator (HEAFELY PLINE1610)</i>		



## **APPENDIX I**

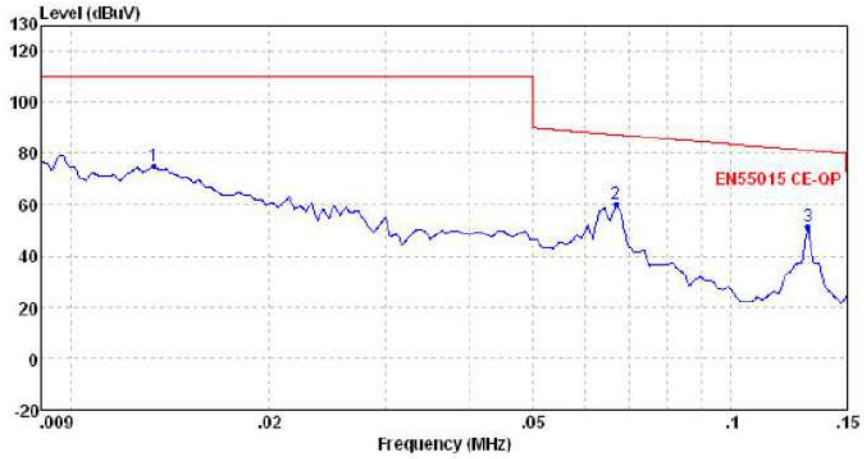


Site : Shenzhen BST Technology Co.,Ltd.

Condition:

: RBW:0.200KHz VBW:30.000KHz

	Freq	Level	Limit	Over	Remark	Pol/Phase
	MHz	dBuV	dBuV	dB		
1	0.01	75.21	110.00	-34.79	Peak	LINE
2 Max	0.07	60.05	87.35	-27.30	Peak	LINE
3	0.13	51.66	81.25	-29.59	Peak	LINE

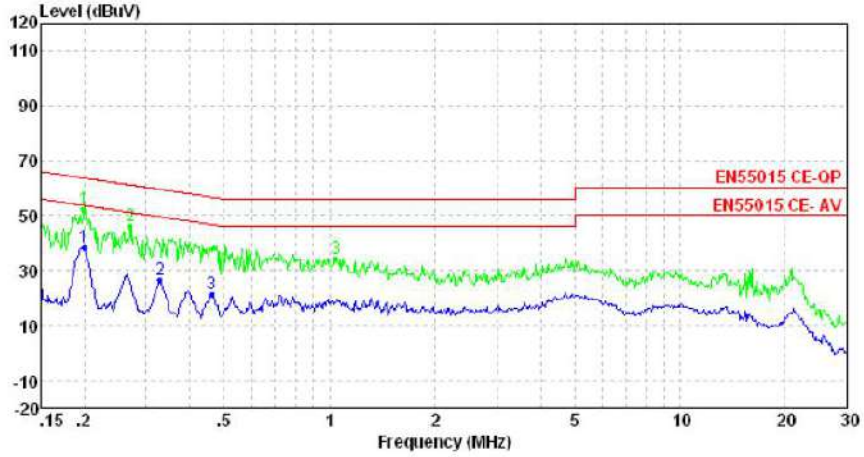

Site : Shenzhen BST Technology Co.,Ltd.

Condition:

: RBW:9.000KHz VBW:30.000KHz

	Freq	Level	Limit	Over	Remark	Pol/Phase
	MHz	dBuV	dBuV	dB		

1	Max	0.20	38.61	53.62	-15.01	Average	LINE
2		0.33	26.37	49.49	-23.12	Average	LINE
3		0.46	21.18	46.67	-25.49	Average	LINE


Site : Shenzhen BST Technology Co.,Ltd.

Condition:

: RBW:9.000KHz VBW:30.000KHz

	Freq	Level	Limit	Over	Remark	Pol/Phase
	MHz	dBuV	dBuV	dB		

1	Max	0.20	52.15	63.67	-11.52	Peak	LINE
2		0.27	46.01	61.12	-15.11	Peak	LINE
3		1.04	34.39	56.00	-21.61	Peak	LINE

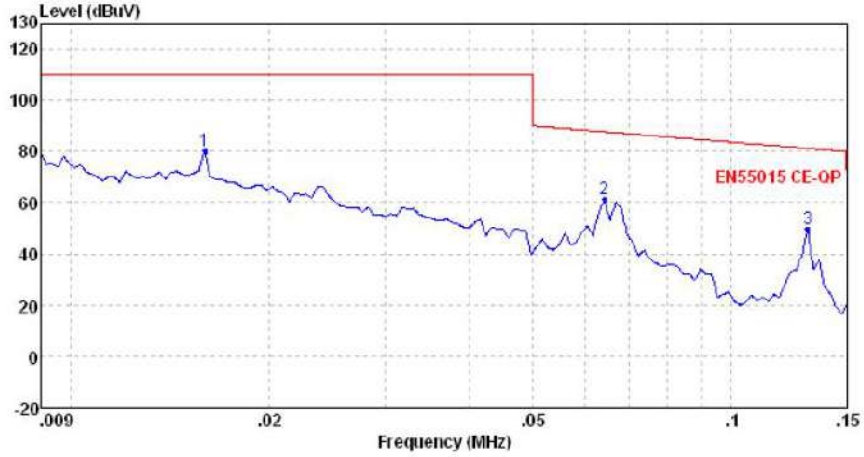


Site : Shenzhen BST Technology Co.,Ltd.

Condition:

: RBW:0.200KHz VBW:30.000KHz

	Freq	Level	Limit	Over	Remark	Pol/Phase
	MHz	dBuV	dBuV	dB		
1	0.02	80.14	110.00	-29.86	Peak	NEUTRAL
2 Max	0.06	81.14	87.71	-26.57	Peak	NEUTRAL
3	0.13	49.99	81.25	-31.26	Peak	NEUTRAL

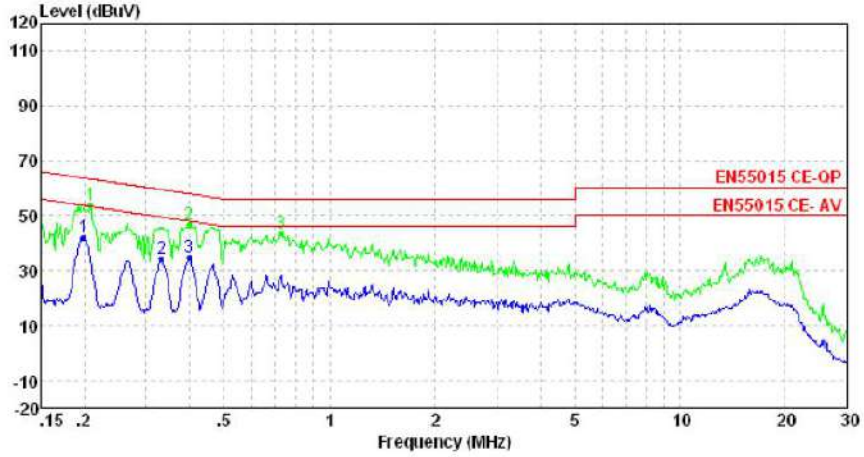

Site : Shenzhen BST Technology Co.,Ltd.

Condition:

: RBW:9.000KHz VBW:30.000KHz

	Freq	Level	Limit	Over	Remark	Pol/Phase
	MHz	dBuV	dBuV	dB		
1 Max	0.20	42.07	53.67	-11.60	Average	NEUTRAL
2	0.33	34.16	49.40	-15.24	Average	NEUTRAL
3	0.40	34.95	47.90	-12.95	Average	NEUTRAL

Site : Shenzhen BST Technology Co.,Ltd.


Condition:

: RBW:9.000KHz VBW:30.000KHz

	Freq	Level	Limit	Over	Remark	Pol/Phase
	MHz	dBuV	dBuV	dB		
1 Max	0.21	53.76	63.27	-9.51	Peak	NEUTRAL
2	0.40	46.53	57.90	-11.37	Peak	NEUTRAL
3	0.73	43.61	56.00	-12.39	Peak	NEUTRAL



## **APPENDIX II**

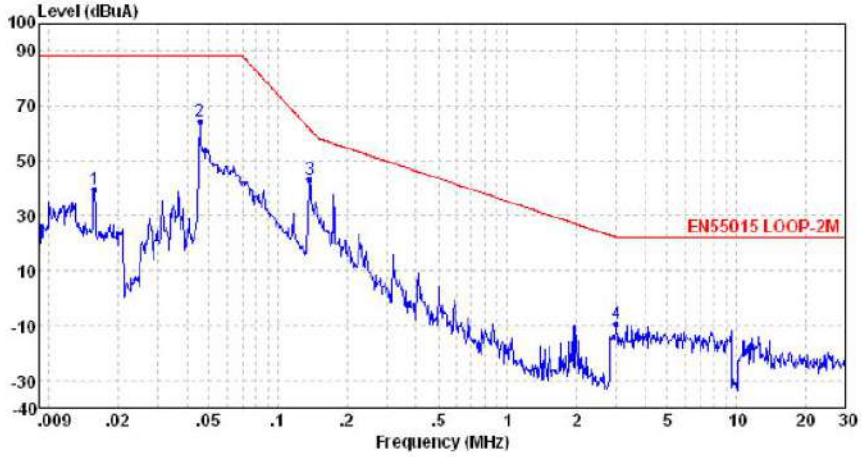

Site : Shenzhen BST Technology Co.,Ltd.

Condition:


: RBW:120.000KHz VBW:300.000KHz

Limit	Over
Line	Limit

Pol/Phase

Line	Freq	Level	Limit	Over	Pol/Phase
	MHz	dBuA	dBuA	dB	
1	0.02	39.50	88.02	-48.52	
2	0.05	64.37	88.02	-23.65	
3 Max	0.14	43.12	61.48	-18.36	
4	3.00	-9.62	22.03	-31.65	



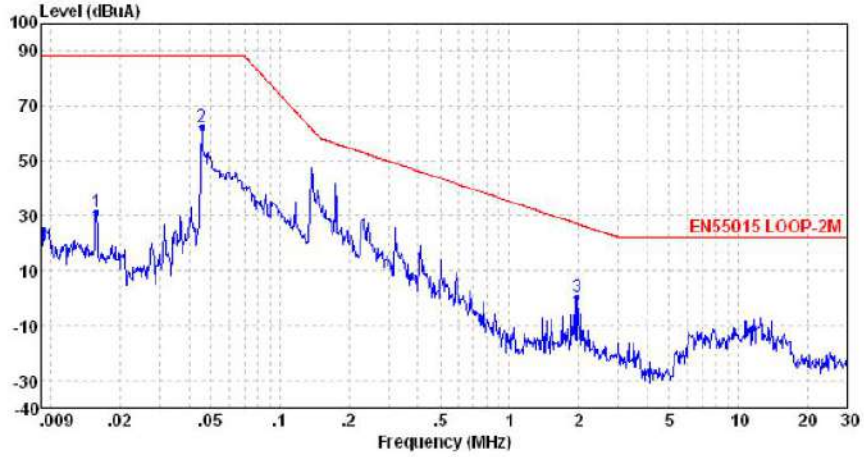


Site : Shenzhen BST Technology Co.,Ltd.

Condition:

: RBW:120.000KHz VBW:300.000KHz

Freq	Level	Limit	Over	Pol/Phase
MHz	dBuA	dBuA	dB	

1	0.02	31.50	88.02	-56.52
2 Max	0.05	62.37	88.02	-25.65
3	1.98	0.13	27.01	-26.88

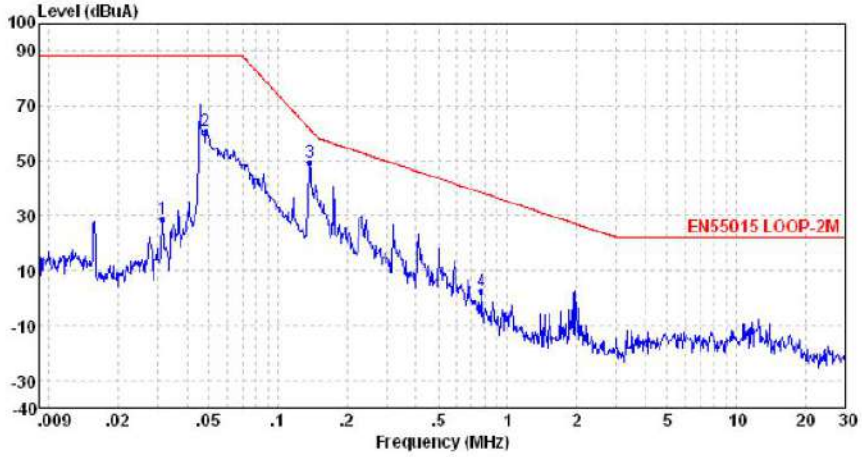

Site : Shenzhen BST Technology Co.,Ltd.

Condition:

: RBW:120.000KHz VBW:300.000KHz

Line	Limit	Over
1	88.02	-59.38
2	88.02	-27.24
3	61.48	-12.36
4	38.31	-35.88


Line	Level	Pol/Phase
1	28.64	
2	60.78	
3	49.12	
4	2.43	

Line	Limit	Over
1	88.02	-59.38
2	88.02	-27.24
3	61.48	-12.36
4	38.31	-35.88

Line	Freq	Level	Limit	Over	Pol/Phase
	MHz	dBuA	dBuA	dB	
1	0.03	28.64	88.02	-59.38	
2	0.05	60.78	88.02	-27.24	
3 Max	0.14	49.12	61.48	-12.36	
4	0.77	2.43	38.31	-35.88	




## **APPENDIX III**

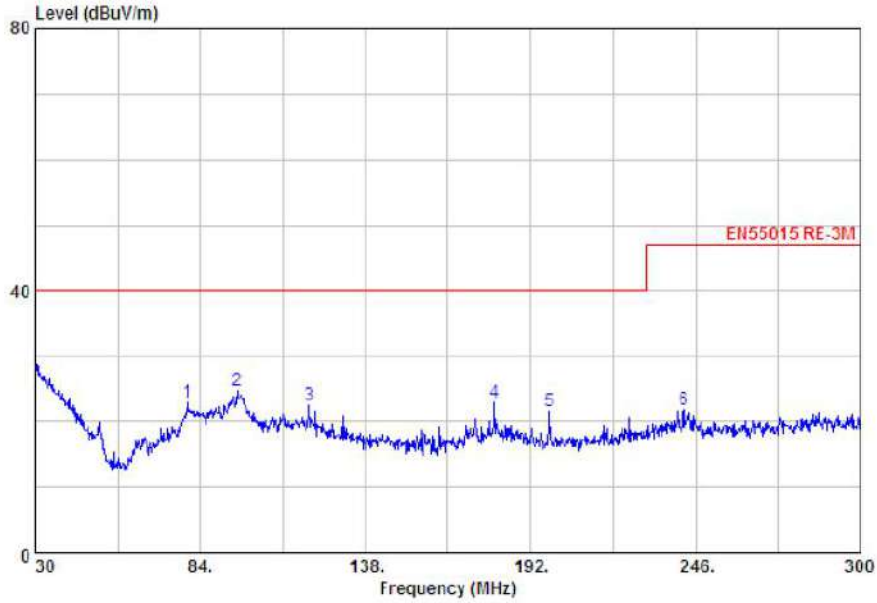

Condition : EN55015 RE-3M 3m HORIZONTAL  
 : RBW:120.000KHz VBW:300.000KHz SVT:Auto

	Freq	Level	Remark	Pol/Phase	Limit	Over
	MHz	dBuV/m			dBuV/m	dB
1	79.950	22.9	Peak	HORIZONTAL	40.0	-17.1
2 max	96.150	24.8	Peak	HORIZONTAL	40.0	-15.2
3	119.640	22.5	Peak	HORIZONTAL	40.0	-17.5
4	180.120	22.9	Peak	HORIZONTAL	40.0	-17.1
5	198.210	21.7	Peak	HORIZONTAL	40.0	-16.3
6	242.220	21.8	Peak	HORIZONTAL	47.0	-25.2

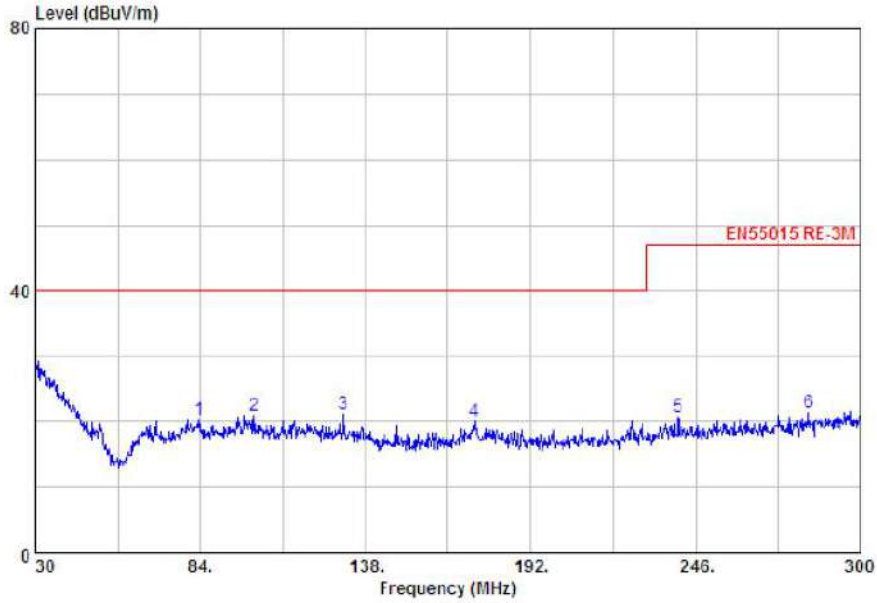

Condition : EN55015 RE-3M 3m VERTICAL  
 : RBW:120.000KHz VBW:300.000KHz SWT:Auto

	Freq	Level	Remark	Pol/Phase	Limit	Over
	MHz	dBuV/m			dBuV/m	dB
1	83.460	20.3	Peak	VERTICAL	40.0	-19.7
2	101.550	21.0	Peak	VERTICAL	40.0	-19.0
3 max	130.710	21.2	Peak	VERTICAL	40.0	-18.8
4	173.640	20.0	Peak	VERTICAL	40.0	-20.0
5	240.060	20.6	Peak	VERTICAL	47.0	-26.2
6	282.090	21.4	Peak	VERTICAL	47.0	-25.6



## **APPENDIX IV**

**Photo 1 General Appearance of the EUT**



**Photo 2 Test View**

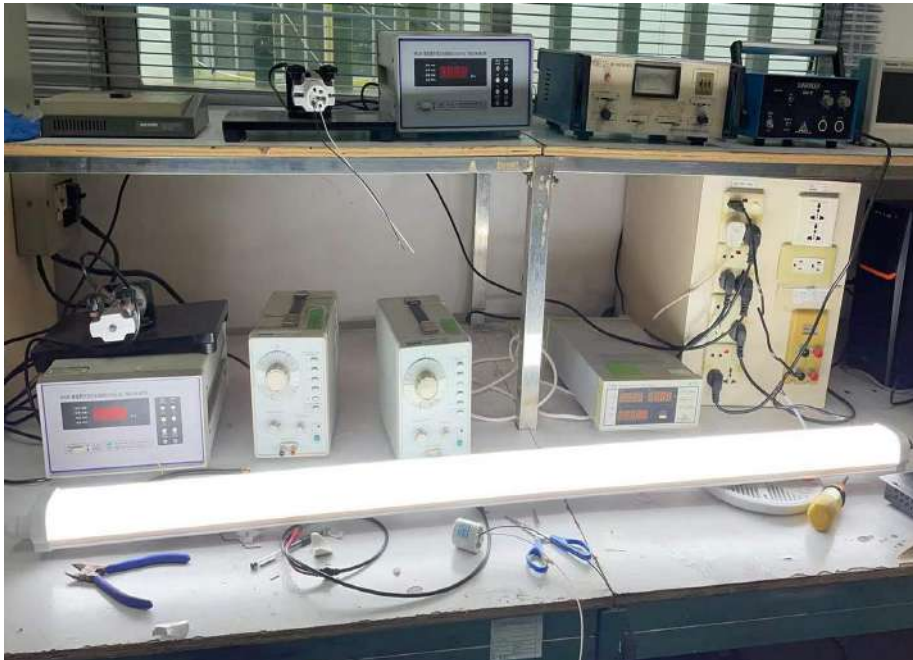




Photo 3 Test View







**Annex B**

**Additional Model :**

BT01-001XX BT01-002XX BT01-003XX BT01-004XX BT01-005XX BT01-006XX BT01-007XX  
BT01-008XX BT01-009XX BT01-010XX BT01-011XX BT01-012XX BT01-013XX BT01-014XX  
BT01-015XX BT01-016XX BT01-017XX BT01-018XX BT01-019XX BT01-020XX BT01-021XX  
BT01-022XX BT01-023XX BT01-024XX BT01-025XX BT01-026XX BT01-027XX BT01-028XX  
BT01-029XX BT01-030XX BT01-031XX BT01-032XX BT01-033XX BT01-034XX BT01-035XX  
BT01-036XX BT01-037XX BT01-038XX BT01-039XX BT01-040XX BT02-006XX BT02-012XX  
BT02-015XX BT03-006XX BT03-012XX BT03-015XX BT04-006XX BT04-012XX BT04-015XX  
BT06-006XX BT06-012XX BT06-015XX BT04-106XX BT04-112XX BT04-115XX BT06-106XX  
BT06-112XX BT06-115XX BT04-206XX BT04-212XX BT04-215XX BT06-206XX BT06-212XX  
BT06-215XX BT04-306XX BT04-312XX BT04-315XX BT06-306XX BT06-312XX BT06-315XX  
BT04-406XX BT04-412XX BT04-415XX BT06-406XX BT06-412XX BT06-415XX BT04-406XX  
BT04-412XX BT04-415XX BT06-406XX BT07-006XX BT07-009XX BT07-012XX BT07-015XX  
BT07-106XX BT07-109XX BT07-112XX BT07-115XX BT07-206XX BT07-209XX BT07-212XX  
BT07-215XX BT07-306XX BT07-309XX BT07-312XX BT07-315XX BT07-406XX BT07-409XX  
BT07-412XX BT07-415XX BT07-506XX BT07-509XX BT07-512XX BT07-515XX BT07-606XX  
BT07-609XX BT07-612XX BT07-615XX BT07-706XX BT07-709XX BT07-712XX BT07-715XX  
BT07-806XX BT07-809XX BT07-812XX BT07-815XX BT07-906XX BT07-909XX BT07-912XX  
BT07-915XX BT08-006XX BT08-009XX BT08-012XX BT08-015XX BT08-106XX BT08-109XX  
BT08-112XX BT08-115XX BT08-206XX BT08-209XX BT08-212XX BT08-215XX BT08-306XX  
BT08-309XX BT08-312XX BT08-315XX BT08-406XX BT08-409XX BT08-412XX BT08-415XX  
BT08-506XX BT08-509XX BT08-512XX BT08-515XX BT08-606XX BT08-609XX BT08-612XX  
BT08-615XX BT08-706XX BT08-709XX BT08-712XX BT08-715XX BT08-806XX BT08-809XX  
BT08-812XX BT08-815XX BT08-906XX BT08-909XX BT08-912XX BT08-915XX BT09-006XX  
BT09-009XX BT09-012XX BT09-015XX BT09-106XX BT09-109XX BT09-112XX BT09-115XX  
BT09-206XX BT09-209XX BT09-212XX BT09-215XX BT09-306XX BT09-309XX BT09-312XX  
BT09-315XX BT09-406XX BT09-409XX BT09-412XX BT09-415XX BT09-506XX BT09-509XX  
BT09-512XX BT09-515XX BT09-606XX BT09-609XX BT09-612XX BT09-615XX BT09-706XX  
BT09-709XX BT09-712XX BT09-715XX BT09-806XX BT09-809XX BT09-812XX BT09-815XX  
BT09-906XX BT09-909XX BT09-912XX BT09-915XX (X=0,1,2,3,4,5,6,7,8,9)