

Test Report issued under the responsibility of:



TEST REPORT
EN 60598-2-4
Luminaires
Luminaires, Part 2: Particular requirements
Section 4: Portable general purpose luminaires

Report Number..... : TCT240815S901
Date of issue..... : 2024-08-20
Total number of pages : 39 (not including attachments)

Name of Testing Laboratory preparing the Report : Shenzhen TCT Testing Technology Co., Ltd.

Applicant's name : BRAYTRON S.R.L
Address..... : B.DUL IULIU MANIU, NR.616, CORP B, ETAJ 1 SECTOR 6, 061129, BUCHAREST, ROMANIA

Test specification:

Standard : EN 60598-2-4:2018 for use in conjunction with EN IEC 60598-1:2021+A11:2022
Test procedure : LVD
Non-standard test method : N/A

TRF template used..... : IECEE OD-2020-F1:2020, Ed.1.3
Test Report Form No. : IEC60598_2_4I
Test Report Form(s) Originator : UL (US)
Master TRF : Dated 2021-06-10

Copyright © 2021 IEC System of Conformity Assessment Schemes for Electrotechnical Equipment and Components (IECEE System). All rights reserved.


This publication may be reproduced in whole or in part for non-commercial purposes as long as the IECEE is acknowledged as copyright owner and source of the material. IECEE takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

If this Test Report Form is used by non-IECEE members, the IECEE/IEC logo and the reference to the CB Scheme procedure shall be removed.

This report is not valid as a CB Test Report unless signed by an approved IECEE Testing Laboratory and appended to a CB Test Certificate issued by an NCB in accordance with IECEE 02.

General disclaimer:

The test results presented in this report relate only to the object tested.
This report shall not be reproduced, except in full, without the written approval of the Issuing NCB. The authenticity of this Test Report and its contents can be verified by contacting the NCB, responsible for this Test Report.

Test item description :	DESK LAMP	
Trade Mark(s)	BRAYTRON	
Manufacturer	DEMGRUP INTERNATIONAL LIGHTING LIMITED UNIT D 16/F, ONE CAPITAL PLACE, 18 LUARD ROAD, WAN CHAI, HONG KONG	
Model/Type reference	BK06-00080 (Other models See Model list)	
Ratings	Input: 5V $\overline{=}$, 1A, 5W Light source power: 3W Battery: 3.6VDC, 2600mAh	
Responsible Testing Laboratory (as applicable), testing procedure and testing location(s):		
<input type="checkbox"/>	CB Testing Laboratory:	Shenzhen TCT Testing Technology Co., Ltd.
	Testing location/ address :	2101 & 2201, Zhenchang Factory, Renshan Industrial Zone, Fuhai Subdistrict, Bao'an District, Shenzhen, Guangdong, China
	Tested by (name, function, signature)	Mick Li
	Approved by (name, function, signature) :	Thomas
		
<input type="checkbox"/>	Testing procedure: CTF Stage 1:	
	Testing location/ address :	
	Tested by (name, function, signature)	
	Approved by (name, function, signature) :	
<input type="checkbox"/>	Testing procedure: CTF Stage 2:	
	Testing location/ address :	
	Tested by (name + signature)	
	Witnessed by (name, function, signature) .:	
	Approved by (name, function, signature) :	
<input type="checkbox"/>	Testing procedure: CTF Stage 3:	
<input type="checkbox"/>	Testing procedure: CTF Stage 4:	
	Testing location/ address :	
	Tested by (name, function, signature)	
	Witnessed by (name, function, signature) .:	
	Approved by (name, function, signature) :	
	Supervised by (name, function, signature) :	

<p>List of Attachments (including a total number of pages in each attachment): See attachments</p>	
<p>Summary of testing:</p>	
<p>Tests performed (name of test and test clause): All applicable test</p>	<p>Testing location: Same as page 2 of report</p>
<p>Summary of compliance with National Differences (List of countries addressed): Europe</p> <p><input checked="" type="checkbox"/> The product fulfils the requirements of below standards: EN IEC 60598-1:2021+A11:2022 EN 60598-2-4:2018 EN IEC 62031:2020+A11:2021 EN 62493:2015+A1:2022</p>	
<p>Statement concerning the uncertainty of the measurement systems used for the tests (may be required by the product standard or client)</p> <p><input type="checkbox"/> Internal procedure used for type testing through which traceability of the measuring uncertainty has been established: Procedure number, issue date and title:</p> <p>Calculations leading to the reported values are on file with the NCB and testing laboratory that conducted the testing.</p> <p><input type="checkbox"/> Statement not required by the standard used for type testing</p> <p>(Note: When IEC or ISO standard requires a statement concerning the uncertainty of the measurement systems used for tests, this should be reported above. The informative text in parenthesis should be delete in both cases after selecting the applicable option)</p>	

Copy of marking plate:

The artwork below may be only a draft. The use of certification marks on a product must be authorized by the respective NCBS that own these marks.

Braytron BK06-00080
TOWER

5w 200lm 3000K WHITE
5V DC MADE IN P.R.C. B/N: 24BR031



Rating label for other models are same as model BK06-00080, only the model no. is different.

Location: Sticking on external surface.

(Size: height of CE mark at least 5mm, height of WEEE mark at least 7mm, height of other marks at least 5mm, height of letters and numerals at least 2mm.)

Test item particulars:	
Classification of installation and use: Portable and for indoor use only	
Supply Connection: DC Inlet and Li-ion Battery	
.....:	
Possible test case verdicts:	
- test case does not apply to the test object.....: N/A	
- test object does meet the requirement.....: P (Pass)	
- test object does not meet the requirement.....: F (Fail)	
Testing:	
Date of receipt of test item: 2024-06-12	
Date (s) of performance of tests: 2024-06-12~2024-07-02	
.....	
General remarks:	
"(See Enclosure #)" refers to additional information appended to the report. "(See appended table)" refers to a table appended to the report.	
Throughout this report a <input type="checkbox"/> comma / <input checked="" type="checkbox"/> point is used as the decimal separator.	
Clause numbers between brackets refer to clauses in IEC 60598-1	
Manufacturer's Declaration per sub-clause 4.2.5 of IEC 60598-1:	
The application for obtaining a CB Test Certificate includes more than one factory location and a declaration from the Manufacturer stating that the sample(s) submitted for evaluation is (are) representative of the products from each factory has been provided :	<input type="checkbox"/> Yes <input checked="" type="checkbox"/> Not applicable
When differences exist; they shall be identified in the General product information section.	
Name and address of factory (ies) : Same as manufacturer	
.....	
General product information and other remarks:	
1. All models have same diagram circuit, except different model names and appearance colors. 2. All tests are carried out on model BK06-00080. 3. All sections of IEC 62493:2015+AMD1:2022, EN 62493:2015+A1:2022 have been evaluated. According to clause 4.2 and Annex H, because the samples are LED-light-source technology, so, all samples were deemed to comply with the requirements of this standard without testing because it fulfils the inherent-compliance conditions.	

Model list

BK01-001XX, BK01-050XX, BK02-001XX, BK05-0001X, BK05-0050X, BK06-0001X, BK06-0050X, BK07-0001X, BK07-0050X,
BK01-002XX, BK01-051XX, BK02-002XX, BK05-0002X, BK05-0051X, BK06-0002X, BK06-0051X, BK07-0002X, BK07-0051X,
BK01-003XX, BK01-052XX, BK02-003XX, BK05-0003X, BK05-0052X, BK06-0003X, BK06-0052X, BK07-0003X, BK07-0052X,
BK01-004XX, BK01-053XX, BK02-004XX, BK05-0004X, BK05-0053X, BK06-0004X, BK06-0053X, BK07-0004X, BK07-0053X,
BK01-005XX, BK01-054XX, BK02-005XX, BK05-0005X, BK05-0054X, BK06-0005X, BK06-0054X, BK07-0005X, BK07-0054X,
BK01-006XX, BK01-055XX, BK02-006XX, BK05-0006X, BK05-0055X, BK06-0006X, BK06-0055X, BK07-0006X, BK07-0055X,
BK01-007XX, BK01-056XX, BK02-007XX, BK05-0007X, BK05-0056X, BK06-0007X, BK06-0056X, BK07-0007X, BK07-0056X,
BK01-008XX, BK01-057XX, BK02-008XX, BK05-0008X, BK05-0057X, BK06-0008X, BK06-0057X, BK07-0008X, BK07-0057X,
BK01-009XX, BK01-058XX, BK02-009XX, BK05-0009X, BK05-0058X, BK06-0009X, BK06-0058X, BK07-0009X, BK07-0058X,
BK01-010XX, BK01-059XX, BK02-010XX, BK05-0010X, BK05-0059X, BK06-0010X, BK06-0059X, BK07-0010X, BK07-0059X,
BK01-011XX, BK01-060XX, BK02-011XX, BK05-0011X, BK05-0060X, BK06-0011X, BK06-0060X, BK07-0011X, BK07-0060X,
BK01-012XX, BK01-061XX, BK02-012XX, BK05-0012X, BK05-0061X, BK06-0012X, BK06-0061X, BK07-0012X, BK07-0061X,
BK01-013XX, BK01-062XX, BK02-013XX, BK05-0013X, BK05-0062X, BK06-0013X, BK06-0062X, BK07-0013X, BK07-0062X,
BK01-014XX, BK01-063XX, BK02-014XX, BK05-0014X, BK05-0063X, BK06-0014X, BK06-0063X, BK07-0014X, BK07-0063X,
BK01-015XX, BK01-064XX, BK02-015XX, BK05-0015X, BK05-0064X, BK06-0015X, BK06-0064X, BK07-0015X, BK07-0064X,
BK01-016XX, BK01-065XX, BK02-016XX, BK05-0016X, BK05-0065X, BK06-0016X, BK06-0065X, BK07-0016X, BK07-0065X,
BK01-017XX, BK01-066XX, BK02-017XX, BK05-0017X, BK05-0066X, BK06-0017X, BK06-0066X, BK07-0017X, BK07-0066X,
BK01-018XX, BK01-067XX, BK02-018XX, BK05-0018X, BK05-0067X, BK06-0018X, BK06-0067X, BK07-0018X, BK07-0067X,
BK01-019XX, BK01-068XX, BK02-019XX, BK05-0019X, BK05-0068X, BK06-0019X, BK06-0068X, BK07-0019X, BK07-0068X,
BK01-020XX, BK01-069XX, BK02-020XX, BK05-0020X, BK05-0069X, BK06-0020X, BK06-0069X, BK07-0020X, BK07-0069X,
BK01-021XX, BK01-070XX, BK02-021XX, BK05-0021X, BK05-0070X, BK06-0021X, BK06-0070X, BK07-0021X, BK07-0070X,
BK01-022XX, BK01-071XX, BK02-022XX, BK05-0022X, BK05-0071X, BK06-0022X, BK06-0071X, BK07-0022X, BK07-0071X,
BK01-023XX, BK01-072XX, BK02-023XX, BK05-0023X, BK05-0072X, BK06-0023X, BK06-0072X, BK07-0023X, BK07-0072X,
BK01-024XX, BK01-073XX, BK02-024XX, BK05-0024X, BK05-0073X, BK06-0024X, BK06-0073X, BK07-0024X, BK07-0073X,
BK01-025XX, BK01-074XX, BK02-025XX, BK05-0025X, BK05-0074X, BK06-0025X, BK06-0074X, BK07-0025X, BK07-0074X,
BK01-026XX, BK01-075XX, BK02-026XX, BK05-0026X, BK05-0075X, BK06-0026X, BK06-0075X, BK07-0026X, BK07-0075X,
BK01-027XX, BK01-076XX, BK02-027XX, BK05-0027X, BK05-0076X, BK06-0027X, BK06-0076X, BK07-0027X, BK07-0076X,
BK01-028XX, BK01-077XX, BK02-028XX, BK05-0028X, BK05-0077X, BK06-0028X, BK06-0077X, BK07-0028X, BK07-0077X,
BK01-029XX, BK01-078XX, BK02-029XX, BK05-0029X, BK05-0078X, BK06-0029X, BK06-0078X, BK07-0029X, BK07-0078X,
BK01-030XX, BK01-079XX, BK02-030XX, BK05-0030X, BK05-0079X, BK06-0030X, BK06-0079X, BK07-0030X, BK07-0079X,
BK01-031XX, BK01-080XX, BK02-031XX, BK05-0031X, BK05-0080X, BK06-0031X, BK06-0080X, BK07-0031X, BK07-0080X,
BK01-032XX, BK01-081XX, BK02-032XX, BK05-0032X, BK05-0081X, BK06-0032X, BK06-0081X, BK07-0032X, BK07-0081X,
BK01-033XX, BK01-082XX, BK02-033XX, BK05-0033X, BK05-0082X, BK06-0033X, BK06-0082X, BK07-0033X, BK07-0082X,
BK01-034XX, BK01-083XX, BK02-034XX, BK05-0034X, BK05-0083X, BK06-0034X, BK06-0083X, BK07-0034X, BK07-0083X,
BK01-035XX, BK01-084XX, BK02-035XX, BK05-0035X, BK05-0084X, BK06-0035X, BK06-0084X, BK07-0035X, BK07-0084X,
BK01-036XX, BK01-085XX, BK02-036XX, BK05-0036X, BK05-0085X, BK06-0036X, BK06-0085X, BK07-0036X, BK07-0085X,
BK01-037XX, BK01-086XX, BK02-037XX, BK05-0037X, BK05-0086X, BK06-0037X, BK06-0086X, BK07-0037X, BK07-0086X,
BK01-038XX, BK01-087XX, BK02-038XX, BK05-0038X, BK05-0087X, BK06-0038X, BK06-0087X, BK07-0038X, BK07-0087X,
BK01-039XX, BK01-088XX, BK02-039XX, BK05-0039X, BK05-0088X, BK06-0039X, BK06-0088X, BK07-0039X, BK07-0088X,
BK01-040XX, BK01-089XX, BK02-040XX, BK05-0040X, BK05-0089X, BK06-0040X, BK06-0089X, BK07-0040X, BK07-0089X,
BK01-041XX, BK01-090XX, BK02-041XX, BK05-0041X, BK05-0090X, BK06-0041X, BK06-0090X, BK07-0041X, BK07-0090X,
BK01-042XX, BK01-091XX, BK02-042XX, BK05-0042X, BK05-0091X, BK06-0042X, BK06-0091X, BK07-0042X, BK07-0091X,
BK01-043XX, BK01-092XX, BK02-043XX, BK05-0043X, BK05-0092X, BK06-0043X, BK06-0092X, BK07-0043X, BK07-0092X,
BK01-044XX, BK01-093XX, BK02-044XX, BK05-0044X, BK05-0093X, BK06-0044X, BK06-0093X, BK07-0044X, BK07-0093X,
BK01-045XX, BK01-094XX, BK02-045XX, BK05-0045X, BK05-0094X, BK06-0045X, BK06-0094X, BK07-0045X, BK07-0094X,
BK01-046XX, BK01-095XX, BK02-046XX, BK05-0046X, BK05-0095X, BK06-0046X, BK06-0095X, BK07-0046X, BK07-0095X,
BK01-047XX, BK01-096XX, BK02-047XX, BK05-0047X, BK05-0096X, BK06-0047X, BK06-0096X, BK07-0047X, BK07-0096X,
BK01-048XX, BK01-097XX, BK02-048XX, BK05-0048X, BK05-0097X, BK06-0048X, BK06-0097X, BK07-0048X, BK07-0097X,
BK01-049XX, BK01-098XX, BK02-049XX, BK05-0049X, BK05-0098X, BK06-0049X, BK06-0098X, BK07-0049X, BK07-0098X,
(X=0, 1, 2, 3, 4, 5, 6, 7, 8, 9)

IEC 60598-2-4			
Clause	Requirement + Test	Result - Remark	Verdict
4.4 (0)	GENERAL TEST REQUIREMENTS		P
4.4 (0.3)	More sections applicable	Yes <input type="checkbox"/> No <input checked="" type="checkbox"/> Section/s:	—
4.4 (0.5)	Components	(see Annex 1)	—
4.4 (0.7)	Information for luminaire design in light sources standards		—
4.4 (0.7.2)	Light source safety standard		—
	Luminaire design in the light source safety standard		P
4.5 (2)	CLASSIFICATION OF LUMINAIRES		P
4.5 (2.2)	Type of protection	Class III	P
4.5 (2.3)	Degree of protection	IP44	—
4.5 (2.4)	Luminaire suitable for direct mounting on normally flammable surfaces	Yes <input checked="" type="checkbox"/> No <input type="checkbox"/>	—
4.5 (2.5)	Luminaire for normal use	Yes <input checked="" type="checkbox"/> No <input type="checkbox"/>	—
	Luminaire for rough service	Yes <input type="checkbox"/> No <input checked="" type="checkbox"/>	—
4.5.1 (-)	Ordinary luminaire classified "for indoor use only" ... :	Yes <input type="checkbox"/> No <input checked="" type="checkbox"/>	—
	Luminaires other than ordinary classified "for indoor use only"	Yes <input type="checkbox"/> No <input checked="" type="checkbox"/>	—
	Luminaires other than ordinary classified for "outdoor use" and "for indoor use"	Yes <input checked="" type="checkbox"/> No <input type="checkbox"/>	—
4.5.2 (-)	Portable luminaire for outdoor use classified IPX4 or higher	IP44	P
4.5.3 (-)	Luminaires designed for standing on a floor or table classified as suitable for direct mounting on normally flammable surfaces		P
4.6 (3)	MARKING		P
4.6 (3.2)	Mandatory markings		P
	Position of the marking		P
	Format of symbols/text		P
4.6 (3.3)	Additional information		P
	Language of instructions	English	P
4.6 (3.3.1)	Combination luminaires		N/A
4.6 (3.3.2)	Nominal frequency in Hz		N/A
4.6 (3.3.3)	Operating temperature		N/A
4.6 (3.3.5)	Wiring diagram		N/A
4.6 (3.3.6)	Special conditions		N/A

IEC 60598-2-4			
Clause	Requirement + Test	Result - Remark	Verdict
4.6 (3.3.7)	Metal halide lamp luminaire – warning		N/A
4.6 (3.3.8)	Limitation for semi-luminaires		N/A
4.6 (3.3.9)	Power factor and supply current		N/A
4.6 (3.3.10)	Suitability for use indoors		P
4.6 (3.3.11)	Luminaires with remote control		N/A
4.6 (3.3.12)	Clip-mounted luminaire – warning		N/A
4.6 (3.3.13)	Specifications of protective shields		N/A
4.6 (3.3.14)	Symbol for nature of supply	---	P
4.6 (3.3.15)	Rated current of socket outlet		N/A
4.6 (3.3.16)	Rough service luminaire		N/A
4.6 (3.3.17)	Mounting instruction for type Y, type Z and some type X attachments		N/A
4.6 (3.3.18)	Non-ordinary luminaires with PVC cable		N/A
4.6 (3.3.19)	Protective conductor current in instruction if applicable		N/A
4.6 (3.3.20)	Provided with information if not intended to be mounted within arm's reach		N/A
4.6 (3.3.21)	Non replaceable and non-user replaceable light sources information provided	Non replaceable light sources	P
4.6 (3.3.22)	Controllable luminaires, classification of insulation provided		N/A
4.6 (3.3.23)	Luminaires without controlgear provided with necessary information for selection of appropriate component		P
4.6 (3.3.24)	If not supplied with terminal block, information on the packaging		N/A
4.6 (3.3.25)	Luminaires employing light sources emitting UV on mains wiring, information provided		N/A
4.6 (3.3.26)	Wall mounted luminaire using external flexible cable or cord longer than 0.3 m, information provided		N/A
4.6 (3.4)	Test with water	15s	P
	Test with hexane	15s	P
	Legible after test		P
	Label attached		P
4.6.1 (-)	Luminaire not suitable for outdoor application		N/A
	Required symbol		N/A
	Information in the instructions		N/A
4.6.2 (-)	Outdoor use, socket outlet incorporated in the luminaire		N/A

IEC 60598-2-4			
Clause	Requirement + Test	Result - Remark	Verdict
	Maximum power rating marked		N/A
	Position of the marking		N/A
4.7 (4)	CONSTRUCTION		P
4.7 (4.2)	Components replaceable without difficulty		P
4.7 (4.3)	Wireways smooth and free from sharp edges		P
4.7 (4.4)	Lampholders		N/A
4.7 (4.4.1)	Integral lampholder		N/A
4.7 (4.4.2)	Wiring connection		N/A
4.7 (4.4.3)	Lampholder for end-to-end mounting		N/A
4.7 (4.4.4)	Positioning		N/A
	- pressure test (N)		—
	After test the lampholder comply with relevant standard sheets and show no damage		N/A
	After test on single-capped lampholder the lampholder have not moved from its position and show no permanent deformation		N/A
	- bending test (N)		—
	After test the lampholder has not moved from its position and show no permanent deformation		N/A
4.7 (4.4.5)	Peak pulse voltage		N/A
4.7 (4.4.6)	Centre contact		N/A
4.7 (4.4.7)	Parts in rough service luminaires resistant to tracking		N/A
4.7 (4.4.8)	Lamp connectors		N/A
4.7 (4.4.9)	Caps and bases correctly used		N/A
4.7 (4.4.10)	Light source for lampholder or connection according IEC 60061 not connected another way		N/A
4.7 (4.5)	Starter holders		N/A
	Starter holder in luminaires other than class II		N/A
	Starter holder class II construction		N/A
4.7 (4.6)	Terminal blocks		N/A
	Tails		N/A
	Unsecured blocks		N/A
4.7 (4.7)	Terminals and supply connections		P
4.7 (4.7.1)	Contact to metal parts		N/A
4.7 (4.7.2)	Test 8 mm live conductor		N/A
	Test 8 mm earth conductor		N/A

IEC 60598-2-4			
Clause	Requirement + Test	Result - Remark	Verdict
4.7 (4.7.3)	Terminals for supply conductors		P
4.7 (4.7.3.1)	Welded method and material		N/A
	- stranded or solid conductor		N/A
	- spot welding		N/A
	- welding between wires		N/A
	- Type Z attachment		N/A
	- mechanical test according to 15.6.2		N/A
	- electrical test according to 15.6.3		N/A
	- heat test according to 15.6.3.2.3 and 15.6.3.2.4		N/A
4.7 (4.7.4)	Terminals other than supply connection		P
4.7 (4.7.5)	Heat-resistant wiring/sleeves		N/A
4.7 (4.7.6)	Multi-pole plug		N/A
	- test at 30 N		N/A
4.7 (4.8)	Switches		P
	- adequate rating		P
	- adequate fixing		P
	- polarized supply		N/A
	- compliance with IEC 61058-1 for electronic switches		P
4.7 (4.9)	Insulating lining and sleeves		N/A
4.7 (4.9.1)	Retainment		N/A
	Method of fixing		N/A
4.7 (4.9.2)	Insulated linings and sleeves:		N/A
	Resistant to a temperature > 20 °C to the wire temperature or		N/A
	a) & c) Insulation resistance and electric strength		N/A
	b) Ageing test. Temperature (°C)		N/A
4.7 (4.10)	Double or reinforced insulation		N/A
4.7 (4.10.1)	No contact, mounting surface – accessible metal parts – wiring of basic insulation		N/A
	Safe installation fixed luminaires		N/A
	Capacitors and switches		N/A
4.7 (4.10.2)	Assembly gaps:		N/A
	- not coincidental		N/A
	- no straight access with test probe		N/A
4.7 (4.10.3)	Retainment of insulation:		N/A

IEC 60598-2-4			
Clause	Requirement + Test	Result - Remark	Verdict
	- fixed		N/A
	- unable to be replaced; luminaire inoperative		N/A
	- sleeves retained in position		N/A
	- lining in lampholder		N/A
4.7 (4.10.4)	Protective impedance device		N/A
	Basic and supplementary insulation bridged by resistor(s) or appropriate capacitor		N/A
	Double or reinforced insulation bridged by at least two separate resistors in series or appropriate capacitor(s)		N/A
	Capacitors comply with IEC 60384-14		N/A
	Resistors comply with test (a) in 14.2 of IEC 60065		N/A
4.7 (4.11)	Electrical connections and current-carrying parts		P
4.7 (4.11.1)	Contact pressure		P
4.7 (4.11.2)	Screws:		N/A
	- self-tapping screws		N/A
	- thread-cutting screws		N/A
4.7 (4.11.3)	Screw locking:		N/A
	- spring washer		N/A
	- rivets		N/A
4.7 (4.11.4)	Material of current-carrying parts		P
4.7 (4.14.7)	No contact to wood or mounting surface		P
4.7 (4.14.7)	Electro-mechanical contact systems		P
4.7 (4.12)	Screws and connections (mechanical) and glands		P
4.7 (4.12.1)	Screws not made of soft metal		P
	Screws of insulating material		N/A
	Torque test: torque (Nm); part..... :	Fixed PCB: 0.5Nm	P
	Torque test: torque (Nm); part..... :	Fixed Battery: 0.5Nm	P
	Torque test: torque (Nm); part..... :		N/A
4.7 (4.12.2)	Screws with diameter < 3 mm screwed into metal		N/A
4.7 (4.12.4)	Locked connections:		N/A
	- fixed arms; torque (Nm)		N/A
	- lampholder; torque (Nm)		N/A
	- push-button switches; torque 0,8 Nm		N/A
4.7 (4.12.5)	Screwed glands; force (Nm)..... :		N/A

IEC 60598-2-4			
Clause	Requirement + Test	Result - Remark	Verdict
4.7 (4.13)	Mechanical strength		P
4.7 (4.13.1)	Impact tests:		P
	- fragile parts; energy (Nm)		N/A
	- other parts; energy (Nm)	0.5Nm	P
	1) live parts		P
	2) linings		N/A
	3) protection		P
	4) covers		P
4.7 (4.13.2)	Metal parts have adequate mechanical strength		N/A
4.7 (4.13.3)	Straight test finger		N/A
4.7 (4.13.4)	Rough service luminaires		N/A
	- IP54 or higher		N/A
	a) fixed		N/A
	b) hand-held		N/A
	c) delivered with a stand		N/A
	d) for temporary installations and suitable for mounting on a stand		N/A
4.7 (4.13.6)	Tumbling barrel		N/A
4.7 (4.14)	Suspensions, fixings and means of adjusting		N/A
4.7 (4.14.1)	Mechanical load:		N/A
	A) four times the weight		N/A
	B) torque 2,5 Nm		N/A
	C) bracket arm; bending moment (Nm).....		N/A
	D) load track-mounted luminaires		N/A
	E) clip-mounted luminaires, glass-shelve. Thickness (mm)		N/A
	Metal rod. diameter (mm)		N/A
	Fixed luminaire or independent control gear without fixing devices		N/A
4.7 (4.14.2)	Load to flexible cables		N/A
	Mass (kg)		—
	Stress in conductors (N/mm ²)		N/A
	Mass (kg) of semi-luminaire		N/A
	Bending moment (Nm) of semi-luminaire		N/A
4.7 (4.14.3)	Adjusting devices:		N/A
	- flexing test; number of cycles.....		N/A

IEC 60598-2-4			
Clause	Requirement + Test	Result - Remark	Verdict
	- strands broken		N/A
	- electric strength test afterwards		N/A
4.7 (4.14.4)	Telescopic tubes: cords not fixed to tube; no strain on conductors		N/A
4.7 (4.14.5)	Guide pulleys		N/A
4.7 (4.14.6)	Strain on socket-outlets		N/A
4.7 (4.15)	Flammable materials		P
	- glow-wire test 650°C	See Test Table 1.15 (13.3.2)	P
	- spacing ≥ 30 mm		N/A
	- screen withstanding test of 13.3.1		N/A
	- screen dimensions		N/A
	- no fiercely burning material		P
	- thermal protection		N/A
	- electronic circuits exempted		N/A
4.7 (4.15.2)	Luminaires made of thermoplastic material with lamp control gear		N/A
	a) construction		N/A
	b) temperature sensing control		N/A
	c) surface temperature		N/A
4.7 (4.16)	Luminaires for mounting on normally flammable surfaces		P
	No lamp control gear	(compliance with Section 12)	P
	Provided with adaptor for a track meet the requirements for direct mounting on normally flammable surfaces		N/A
4.7 (4.16.1)	Lamp control gear spacing:		N/A
	- spacing 35 mm		N/A
	- spacing 10 mm		N/A
4.7 (4.16.2)	Thermal protection:		N/A
	- in lamp control gear		N/A
	- external		N/A
	- fixed position		N/A
	- temperature marked lamp control gear		N/A
4.7 (4.16.3)	Design to satisfy the test of 12.6	(see clause 12.6)	N/A
4.7 (4.17)	Drain holes		N/A
	Clearance at least 5 mm		N/A
4.7 (4.18)	Resistance to corrosion		N/A
4.7 (4.18.1)	- rust-resistance		N/A

IEC 60598-2-4			
Clause	Requirement + Test	Result - Remark	Verdict
4.7 (4.18.2)	- season cracking in copper		N/A
4.7 (4.18.3)	- corrosion of aluminium		N/A
4.7 (4.19)	Igniters compatible with ballast		N/A
4.7 (4.20)	Rough service vibration		N/A
4.7 (4.21)	Protective shield		N/A
4.7 (4.21.1)	Shield fitted if tungsten halogen lamps or metal halide lamps		N/A
	Shield of glass if tungsten halogen lamps		N/A
4.7 (4.21.2)	Particles from a shattering lamp not impair safety		N/A
4.7 (4.21.3)	No direct path		N/A
4.7 (4.21.4)	Impact test on shield		N/A
	Glow-wire test on lamp compartment..... :	See Test Table 1.15 (13.3.2)	N/A
4.7 (4.22)	Attachments to lamps not cause overheating or damage		N/A
4.7 (4.23)	Semi-luminaires comply Class II		N/A
4.7 (4.24)	Photobiological hazards		P
4.7 (4.24.1)	No excessive UV radiation if tungsten halogen lamps and metal halide lamps (Annex P)		N/A
4.7 (4.24.2)	Retinal blue light hazard		P
	Class of risk group assessed according to IEC/TR 62778		—
	Luminaires with E_{thr} :		N/A
	a) Fixed luminaires		N/A
	- distance x m, borderline between RG1 and RG2 .. :		N/A
	- marking and instruction according 3.2.23		N/A
	b) Portable and handheld luminaires	RG1	P
	- marking according 3.2.23 if RG1 exceeded at 200 mm according to IEC/TR 62778		N/A
	Portable luminaires for children IEC 60598-2-10 and Mains socket outlet nightlights IEC 60598-2-12 not exceed RG1 at 200 mm according to IEC/62778		N/A
4.7 (4.25)	Mechanical hazard		P
	No sharp point or edges		P
4.7 (4.26)	Short-circuit protection		N/A
4.7 (4.26.1)	Adequate means of uninsulated accessible SELV or PELV parts		N/A
4.7 (4.26.2)	Short-circuit test with test chain according 4.26.3		N/A
	Supply source ES1 PSE		N/A

IEC 60598-2-4			
Clause	Requirement + Test	Result - Remark	Verdict
	Test chain not melt through		N/A
	Test sample not exceed values of Table 12.1 and 12.2		N/A
4.7 (4.27)	Terminal blocks with integrated screwless protective earthing contacts		N/A
	Test according Annex V		N/A
	Pull test of terminal fixing (20 N)		N/A
	After test, resistance < 0,05 Ω		N/A
	Pull test of mechanical connection (50 N)		N/A
	After test, resistance < 0,05 Ω		N/A
	Voltage drop test, resistance < 0,05 Ω		N/A
4.7 (4.28)	Fixing of thermal sensing control		N/A
	Not plug-in or easily replaceable type		N/A
	Reliably kept in position		N/A
	No adhesive fixing if UV radiations from a lamp can degrade the fixing		N/A
	Not outside the luminaire enclosure		N/A
	Test of adhesive fixing:		N/A
	Max. temperature on adhesive material (°C) :		—
	100 cycles between t_{min} and t_{max}		N/A
	Temperature sensing control still in position		N/A
4.7 (4.29)	Luminaires with non-replaceable light source		P
	Not possible to replace light source		P
	Live part not accessible after parts have been opened by hand or tools		N/A
4.7 (4.30)	Luminaires with non-user replaceable light source		N/A
	If protective cover provide protection against electric shock and marked with “caution, electric shock risk” symbol:		N/A
	At least one fixing means requiring use of tool		N/A
4.7 (4.31)	Insulation between circuits		P
	Circuits insulated from LV supply fulfil requirements according 4.31.1 – 4.31.3		P
	Controllable luminaires requiring same level of insulation for all components, the insulation between control terminals and LV supply fulfil requirements according 4.31.1 – 4.31.3		N/A
4.7 (4.31.1)	SELV or PELV circuits		P
	Used SELV or PELV source		P

IEC 60598-2-4			
Clause	Requirement + Test	Result - Remark	Verdict
	Voltage ≤ ELV		P
	Insulating of SELV or PELV circuits from LV supply		N/A
	Insulating of SELV or PELV circuits from other non SELV or PELV circuits		N/A
	Insulating of SELV or PELV circuits from FELV		N/A
	Insulating of SELV or PELV circuits from other SELV or PELV circuits		N/A
	SELV or PELV circuits insulated from accessible parts according Table X.1		N/A
	Plugs not able to make any electrical contact with socket-outlets of other voltage systems		N/A
	Socket outlets does not admit plugs of other voltage systems		N/A
	Plugs and socket-outlets does not have protective conductor contact		N/A
4.7 (4.31.2)	FELV circuits		N/A
	Used FELV source		N/A
	Voltage ≤ ELV		N/A
	Insulating of FELV circuits from LV supply		N/A
	FELV circuits insulated from accessible parts according Table X.1		N/A
	Plugs not able to make any electrical contact with socket-outlets of other voltage systems		N/A
	Socket outlets does not admit plugs of other voltage systems		N/A
	Socket-outlets have protective conductor contact		N/A
4.7 (4.31.3)	Other circuits		N/A
	Other circuits insulated from accessible parts according Table X.1		N/A
	Class II construction with equipotential bonding for protection against indirect contacts with live parts:		N/A
	- conductive parts are connected together		N/A
	- test according 7.2.3		N/A
	- conductive part does not cause an electric shock in case of an insulation fault		N/A
	- equipotential bonding in master/slave applications		N/A
	- master luminaire provided with terminal for accessible conductive parts of slave luminaires		N/A
	- slave luminaire constructed as class I		N/A

IEC 60598-2-4			
Clause	Requirement + Test	Result - Remark	Verdict
4.7 (4.32)	Overvoltage protective devices		N/A
	Comply with IEC 61643-11		N/A
	External to controlgear and connected to earth:		N/A
	- only in fixed luminaires		N/A
	- only connected to protective earth		N/A
4.7 (4.33)	Luminaire powered via information technology communication cabling		P
	Requirements for Class III luminaire		P
	Rated voltage within the range of ES1 and does not exceed maximum voltage of used connector		P
	Luminaire does not create any hazard from overvoltage	(see Annex 2)	P
4.7 (4.34)	Electromagnetic fields (EMF)		P
	No harmful electromagnetic fields		P
4.7 (4.35)	Protection against moving fan blades		N/A
	Test with a standard test finger		N/A
	Test with test probe acc. to Figure 13 (IEC 61032) for portable luminaire		N/A
	Blades rounded with radius ≥ 0.5 mm and:		N/A
	- hardness less than D60 Shore		N/A
	- peripheral speed less than 15 m/s		N/A
	- input power of fan ≤ 2 W at rated voltage		N/A
4.7 (4.36)	Track-mounted luminaires		N/A
	Test in accordance with Annex A of IEC60570:2003/AMD2:2019		N/A
4.7.1 (-)	Insulation not damaged when moving, adjusting or placing on support		P
4.7.2 (-)	Wiring fixed, to avoid rubbing		P
	Carrier or clips of insulation material or with insulating lining		P
4.7.3 (-)	Luminaire does not overturn:		P
	- at an angle of 6° for indoor use		N/A
	- at an angle 15° for outdoor use		P
4.7.4 (-)	Candlestick luminaires provided with switch		N/A
	Switch in candlestick luminaires with E5 or E10 lampholders switches all lamps on and off simultaneously		N/A
	Switch part of the luminaire or within 300 mm of the luminaire if with cord		N/A

IEC 60598-2-4			
Clause	Requirement + Test	Result - Remark	Verdict
4.7.5 (-)	Voltage not exceeding 25 V for E5 lampholders		N/A
	E10 lampholder voltage:		N/A
	- not exceeding 60 V for series connection		N/A
	- not exceeding 250 V for parallel connection		N/A
	Maximum rated wattage does not exceed 100 W		N/A
4.7.6 (-)	Tails not provided for luminaires for outdoor use		P
4.7.7 (-)	Not more than two cable entries for luminaires for outdoor use		P
4.7.8 (-)	Portable luminaires for outdoor use, socket-outlet degree of protection at least same as the luminaire but not less than IPX4.		N/A
	Degree of protection maintained with or without a plug inserted into the socket-outlet.		N/A
	Class II luminaires, mains socket-outlets comply with the standard and only allow connection to Class II luminaires		N/A
	Class I luminaires, mains socket-outlets comply with the standard and only allow connection to Class I or Class II luminaires		N/A
4.7.9 (-)	Lampholders and plugs resistant to tracking for luminaires for outdoor use	See Test Table 4.16 (13.4)	N/A
	Compliance to clause 13.4		N/A

4.8 (11)	CREEPAGE DISTANCES AND CLEARANCES		N/A
4.8 (11.2.1)	Impulse withstand category (Normal category II)	Category II <input type="checkbox"/> Category III <input type="checkbox"/>	—
	Category III according Annex U		N/A
	Protected against pollution, reduced creepage and clearance according Annex P of IEC 61347-1		N/A
4.8 (11.2.2)	Creepage distances for frequency up to 30 kHz	See Test Table 4.8 (11.2) I	N/A
	Creepage distances for frequency over 30 kHz:		N/A
	- Controlgear marked with \hat{U}_{OUT} and f_{UOUT} according IEC 61347-1, clause 7.1, item w	See Test Table 4.8 (11.2) II	N/A
	- Requirements according IEC 60664-4 for controlgear not covered by IEC 61347	See Test Table 4.8 (11.2) II	N/A
4.8 (11.2.3)	Clearances for frequency up to 30 kHz	See Test Table 4.8 (11.2) I	N/A
	Clearances distances for frequency over 30 kHz:		N/A
	- Controlgear marked with U_p	See Test Table 4.8 (11.2) II	N/A
	- Requirements according IEC 60664-4 for controlgear not covered by IEC 61347	See Test Table 4.8 (11.2) II	N/A

IEC 60598-2-4			
Clause	Requirement + Test	Result - Remark	Verdict

4.9 (7)	PROVISION FOR EARTHING		N/A
4.9 (7.2.1 + 7.2.3)	Accessible metal parts	Class III	N/A
	Metal parts in contact with supporting surface		N/A
	Resistance < 0,5 Ω..... :		N/A
	Self-tapping screws used		N/A
	Thread-forming screws		N/A
	Thread-forming screw used in a groove		N/A
	Protective earth makes contact first		N/A
	Terminal blocks with integrated screwless protective earthing contacts tested according Annex V		N/A
	Protective earthing of the luminaire not via built-in control gear		N/A
4.9 (7.2.2 + 7.2.3)	Protective earthing continuity in joints, etc.		N/A
4.9 (7.2.4)	Locking of clamping means		N/A
	Compliance with 4.7.3		N/A
4.9 (7.2.5)	Earth terminal integral part of connector socket		N/A
4.9 (7.2.6)	Earth terminal adjacent to mains terminals		N/A
4.9 (7.2.7)	Electrolytic corrosion of the protective earth terminal		N/A
4.9 (7.2.8)	Material of protective earth terminal		N/A
	Contact surface bare metal		N/A
4.9 (7.2.10)	Class II luminaire for looping-in		N/A
	Double or reinforced insulation to functional earth		N/A
4.9 (7.2.11)	Protective earthing core coloured green-yellow		N/A
	Length of protective earthing conductor		N/A
4.9 (7.2.12)	PELV circuit connected to protective earth for functional purpose		N/A

4.10 (14)	SCREW TERMINALS		N/A
	Separately approved; component list..... :	(see Annex 1)	N/A
	Part of the luminaire	(see Annex 3)	N/A

4.10 (15)	SCREWLESS TERMINALS AND ELECTRICAL CONNECTIONS		N/A
	Separately approved; component list..... :	(see Annex 1)	N/A

IEC 60598-2-4			
Clause	Requirement + Test	Result - Remark	Verdict
	Part of the luminaire	(see Annex 4)	N/A
4.11 (5)	EXTERNAL AND INTERNAL WIRING		P
4.11 (5.2)	Supply connection and external wiring		N/A
4.11 (5.2.1)	Means of connection	DC Inlet	N/A
	Outdoor luminaire has not PVC insulated external wiring if not Class III or SELV/PELV circuits ≤ 25 V AC/60 V DC/25 V peak interrupted DC voltage with frequency 10Hz -200 Hz or protected from outdoor environment		N/A
4.11 (5.2.2)	Type of cable		N/A
	Nominal cross-sectional area (mm ²)		N/A
	Cables equal to IEC 60227 or IEC 60245		N/A
4.11 (5.2.3)	Type of attachment, X, Y or Z		N/A
4.11 (5.2.5)	Type Z not connected to screws		N/A
4.11 (5.2.6)	Cable entries:		N/A
	- suitable for introduction		N/A
	- adequate degree of protection		N/A
4.11 (5.2.7)	Cable entries through rigid material have rounded edges		N/A
4.11 (5.2.8)	Insulating bushings:		N/A
	- suitably fixed		N/A
	- material in bushings		N/A
	- material not likely to deteriorate		N/A
	- tubes or guards made of insulating material		N/A
4.11 (5.2.9)	Locking of screwed bushings		N/A
4.11 (5.2.10)	Cord anchorage:		N/A
	- covering protected from abrasion		N/A
	- clear how to be effective		N/A
	- no mechanical or thermal stress		N/A
	- no tying of cables into knots etc.		N/A
	- insulating material or lining		N/A
4.11 (5.2.10.1)	Cord anchorage for type X attachment:		N/A
	a) at least one part fixed		N/A
	b) types of cable		N/A

IEC 60598-2-4			
Clause	Requirement + Test	Result - Remark	Verdict
	c) no damaging of the cable		N/A
	d) whole cable can be mounted		N/A
	e) no touching of clamping screws		N/A
	f) metal screw not directly on cable		N/A
	g) replacement without special tool		N/A
	Glands not used as anchorage		N/A
	Labyrinth type anchorages		N/A
4.11 (5.2.10.2)	Adequate cord anchorage for type Y and type Z attachment		N/A
4.11 (5.2.10.3)	Tests:		N/A
	- impossible to push cable; unsafe		N/A
	- pull test: 25 times; pull (N)		N/A
	- torque test: torque (Nm)		N/A
	- displacement ≤ 2 mm		N/A
	- no movement of conductors		N/A
	- no damage of cable or cord		N/A
	- function independent of electrical connection		N/A
4.11 (5.2.10.4)	Luminaire with/ designed for use with supply cord with maximum current of 2A:		N/A
	- Ordinary Class III luminaire supplied with SELV $\leq 25V$ RMS/60V DC		N/A
	- Ordinary Class III luminaire supplied with PELV $\leq 12V$ RMS/30V DC		N/A
	- Other than ordinary Class III luminaire supplied with voltage $\leq 12V$ RMS/30V DC		N/A
	Pull test of 30 N		N/A
4.11 (5.2.11)	External wiring passing into luminaire		N/A
4.11 (5.2.12)	Looping-in terminals		N/A
4.11 (5.2.13)	Wire ends not tinned		N/A
	Wire ends tinned: no cold flow		N/A
4.11 (5.2.14)	Mains plug same protection		N/A
	Class III luminaire plug		N/A
	No unsafe compatibility		N/A

IEC 60598-2-4			
Clause	Requirement + Test	Result - Remark	Verdict
4.11 (5.2.15)	Connectors for Class III luminaires (IEC 60603 or IEC 62680)		N/A
4.11 (5.2.16)	Appliance inlets (IEC 60320)		N/A
	Installation couplers (IEC 61535)		N/A
	Appliance inlet or connector systems (IEC 61984)		N/A
4.11 (5.2.17)	No standardized interconnecting cables properly assembled		N/A
4.11 (5.2.18)	Used plug in accordance with		N/A
	- IEC 60083		N/A
	- other standard		N/A
4.11 (5.3)	Internal wiring		P
4.11 (5.3.1)	Internal wiring of suitable size and type		P
	Through wiring		N/A
	- not delivered/ mounting instruction		N/A
	- factory assembled		N/A
	- socket outlet loaded (A)		N/A
	- temperatures	(see Annex 2)	N/A
	Green-yellow for protective earth only		N/A
4.11 (5.3.1.1)	Internal wiring connected directly to fixed wiring		N/A
	Cross-sectional area (mm ²).....		N/A
	Insulation thickness (mm)		N/A
	Extra insulation added where necessary		N/A
4.11 (5.3.1.2)	Internal wiring connected to fixed wiring via internal current-limiting device		P
	Cross-sectional area (mm ²).....		P
4.11 (5.3.1.3)	Double or reinforced insulation for class II		N/A
4.11 (5.3.1.4)	Conductors without insulation		N/A
4.11 (5.3.1.5)	SELV or PELV current-carrying parts		P
4.11 (5.3.1.6)	Insulation thickness other than PVC or rubber		N/A
4.11 (5.3.2)	Sharp edges etc.		P
	No moving parts of switches etc.		P

IEC 60598-2-4			
Clause	Requirement + Test	Result - Remark	Verdict
	Joints, raising/lowering devices		N/A
	Telescopic tubes etc.		N/A
	No twisting over 360°		P
4.11 (5.3.3)	Insulating bushings:		N/A
	- suitable fixed		N/A
	- material in bushings		N/A
	- material not likely to deteriorate		N/A
	- cables with protective sheath		N/A
4.11 (5.3.4)	Joints and junctions effectively insulated		N/A
4.11 (5.3.5)	Strain on internal wiring		N/A
4.11 (5.3.6)	Wire carriers		N/A
4.11 (5.3.7)	Wire ends not tinned		N/A
	Wire ends tinned: no cold flow		P
4.11 (5.4)	Test to determine suitability of conductors having a reduced cross-sectional area		N/A
	Under test the temperature of the luminaire wiring insulation does not exceed the limits stated in Table 12.2	(see Annex 2)	N/A
	No damage to luminaire wiring after test		N/A
4.11.1 (-)	Cord anchorage of luminaire for indoor use made of glass or ceramic not fixed or integral		N/A
4.11.2 (-)	For Class I and Class II luminaires for indoor use, if:		N/A
	- mass < 1 kg (kg)		N/A
	- rated current ≤ 2,5 A (A).....		N/A
	- cable length ≤ 2 m (m)		N/A
	- the nominal cross-sectional area of copper conductor ≥ 0,5 mm ² (mm ²).....		N/A
4.11.3 (-)	Terminals, cord anchorage and inlet opening provided for luminaire for outdoor use delivered without a flexible cable or cord and a plug.		N/A
4.11.4 (-)	Non-detachable flexible cables or cords not lighter than type 245 IEC 57 for Class I and Class II luminaires for outdoor use.		N/A
4.12 (8)	PROTECTION AGAINST ELECTRIC SHOCK		N/A
4.12 (8.2.1)	Live parts not accessible		N/A
	Basic insulated parts not used on the outer surface without appropriate protection		N/A

IEC 60598-2-4			
Clause	Requirement + Test	Result - Remark	Verdict
	Basic insulated parts not accessible with standard test finger on portable, settable and adjustable luminaires		N/A
	Basic insulated parts not accessible with Ø 50 mm probe from outside, other types of luminaires		N/A
	Lamp and starterholders in portable and adjustable luminaires comply with double or reinforced insulation requirements		N/A
	Basic insulation only accessible under lamp or starter replacement		N/A
	Protection in any position		N/A
	Double-ended tungsten filament lamp		N/A
	Insulation lacquer not reliable		N/A
	Double-ended high-pressure discharge lamp		N/A
	Relevant warning according to 3.2.18 fitted to the luminaire		N/A
4.12 (8.2.2)	Portable luminaire adjusted in most unfavourable position		N/A
4.12 (8.2.3.a)	Class II luminaire:		N/A
	- basic insulated metal parts not accessible		N/A
	- required insulation from live parts in compliance with Table X.1		N/A
	- glass protective shields not used as supplementary insulation		N/A
4.12 (8.2.3.b)	Metal BC lampholder in class I luminaires connected to protective earth		N/A
4.12 (8.2.3.c)	SELV circuits with exposed current carrying parts:		N/A
	Ordinary luminaire:		N/A
	- voltage under load/ no-load AC (V)..... :		N/A
	- voltage under load/ no-load DC (V)		N/A
	- interrupted DC voltage (V)		N/A
	- touch current if applicable (mA)		N/A
	One conductive part insulated		N/A
	Other than ordinary luminaire:		N/A
	- voltage under load/ no-load AC (V)..... :		N/A
	- voltage under load/ no-load DC (V)		N/A
	- interrupted DC voltage (V)		N/A

IEC 60598-2-4			
Clause	Requirement + Test	Result - Remark	Verdict
4.12 (8.2.3.d)	PELV circuits with exposed current carrying parts:		N/A
	Ordinary luminaire:		N/A
	- voltage under load/ no-load AC (V)..... :		N/A
	- voltage under load/ no-load DC (V)		N/A
	Other than ordinary luminaire:		N/A
	- voltage under load/ no-load AC (V)..... :		N/A
	- voltage under load/ no-load DC (V)		N/A
	Pole not connected to earth insulated		N/A
	Class III luminaire only for connection to SELV or PELV		N/A
4.12 (8.2.4)	Portable luminaire has protection independent of supporting surface		N/A
4.12 (8.2.5)	Compliance with the standard test finger or relevant probe		N/A
4.12 (8.2.6)	Covers reliably secured		N/A
4.12 (8.2.7)	Luminaire other than below with capacitor > 0,5 µF not exceed 50 V 1 min after disconnection		N/A
	Portable luminaire with capacitor > 0,1 µF (0,25) not exceed 34 V 1 s after disconnection		N/A
	Other luminaires with capacitor > 0,1 µF (0,25) with plug and track adaptors not exceed 60 V 5 s after disconnection		N/A
4.12 (-)	Class I luminaire with bayonet lampholder:		N/A
	1) cap not accessible with test finger		N/A
	2) metal lampholder is earthed		N/A

4.13 (12)	ENDURANCE TEST AND THERMAL TEST		P
4.13 (-)	If IP > IP 20 relevant test of (12.4), (12.5), (12.6) and (12.7) after (9.2) but before (9.3) specified in 4.14		—
4.13 (12.2)	Selection of lamps and ballasts		—
	Lamp used according Annex B	(Lamp used see Annex 2)	—
	Controlgear if separate and not supplied	(Controlgear used see Annex 2)	—
4.13 (12.3)	Endurance test		P
	a) mounting-position	As normal use	—
	b) test temperature (°C)	35°C	—
	c) total duration (h)	240h	—
	d) supply voltage (V)		—

IEC 60598-2-4			
Clause	Requirement + Test	Result - Remark	Verdict
	d) if not equipped with controlgear, constant voltage/current (V) or (A)		—
1.13 (12.3.1d)	d) Class III luminaires powered via information technology communication cable:		—
	- voltage under normal operation (V)	5.5V	—
	- voltage under abnormal operation (V)	7.5V	—
	e) luminaire ceases to operate		—
	f) luminaire with a constant light output function		—
4.13 (12.3.2)	After endurance test:		P
	- no part unserviceable		P
	- luminaire not unsafe		P
	- no damage to track system		N/A
	- marking legible		P
	- no cracks, deformation etc.		N/A
4.13 (12.4)	Thermal test (normal operation)	(Annex 2)	P
4.13 (12.5)	Thermal test (abnormal operation)	(Annex 2)	P
4.13 (12.6)	Thermal test (failed lamp control gear condition):		N/A
4.13 (12.6.1)	Through wiring or looping-in wiring loaded by a current of (A)		—
	- case of abnormal conditions		—
	- electronic lamp control gear		N/A
	- measured winding temperature (°C): at 1,1 Un		—
	- measured mounting surface temperature (°C) at 1,1 Un		N/A
	- calculated mounting surface temperature (°C)		N/A
	- track-mounted luminaires		N/A
4.13 (12.6.2)	Temperature sensing control		N/A
	- case of abnormal conditions		—
	- thermal link		N/A
	- manual reset cut-out		N/A
	- auto reset cut-out		N/A
	- measured mounting surface temperature (°C)		N/A
	- track-mounted luminaires		N/A
4.13 (12.7)	Thermal test (failed lamp control gear in plastic luminaires):		N/A

IEC 60598-2-4			
Clause	Requirement + Test	Result - Remark	Verdict
4.13 (12.7.1)	Luminaire without temperature sensing control		N/A
4.13 (12.7.1.1)	Luminaire with fluorescent lamp ≤ 70W		N/A
	Test method 12.7.1.1 or Annex W		—
	Test according to 12.7.1.1:		N/A
	- case of abnormal conditions		—
	- Ballast failure at supply voltage (V)		—
	- Components retained in place after the test		N/A
	- Test with standard test finger after the test		N/A
	Test according to Annex W:		N/A
	- case of abnormal conditions		—
	- measured winding temperature (°C): at 1,1 Un		—
	- measured temperature of fixing point/exposed part (°C): at 1,1 Un		—
	- calculated temperature of fixing point/exposed part (°C)		—
	Ball-pressure test	See Test Table 1.15 (13.2.1)	N/A
4.13 (12.7.1.2)	Luminaire with discharge lamp, fluorescent lamp > 70W, transformer > 10 VA		N/A
	- case of abnormal conditions		—
	- measured winding temperature (°C): at 1,1 Un		—
	- measured temperature of fixing point/exposed part (°C): at 1,1 Un		—
	- calculated temperature of fixing point/exposed part (°C)		—
	Ball-pressure test	See Test Table 1.15 (13.2.1)	N/A
4.13 (12.7.1.3)	Luminaire with short circuit proof transformers ≤ 10 VA		N/A
	- case of abnormal conditions		—
	- Components retained in place after the test		N/A
	- Test with standard test finger after the test		N/A
4.13 (12.7.2)	Luminaire with temperature sensing control		N/A
	- thermal link	Yes <input type="checkbox"/> No <input type="checkbox"/>	—
	- manual reset cut-out	Yes <input type="checkbox"/> No <input type="checkbox"/>	—
	- auto reset cut-out	Yes <input type="checkbox"/> No <input type="checkbox"/>	—

IEC 60598-2-4			
Clause	Requirement + Test	Result - Remark	Verdict
	- case of abnormal conditions		—
	- highest measured temperature of fixing point/ exposed part (°C):		—
	Ball-pressure test:	See Test Table 4.15 (13.2.1)	N/A
4.13 (-)	Luminaire for indoor use tested in overturned position (overturns < 15°)	overturned	P

4.14 (9)	RESISTANCE TO DUST AND MOISTURE		P
4.14 (-)	If IP > IP 20 the order of tests as specified in clause 4.13		N/A
4.14 (9.2)	Tests for ingress of dust, solid objects and moisture:		P
	- classification according to IP.....	IP44 (See report TCT240815S007)	—
	- mounting position during test		—
	- fixing screws tightened; torque (Nm)		—
	- tests according to clauses.....		—
	- electric strength test afterwards		N/A
	a) no deposit in dust-proof luminaire		N/A
	b) no talcum in dust-tight luminaire		N/A
	c) no trace of water on current-carrying parts or on insulation where it could become a hazard		N/A
	c.1) For luminaires without drain holes – no water entry		N/A
	c.2) For luminaires with drain holes – no hazardous water entry		N/A
	d) no water in watertight, pressure watertight, high pressure and temperature water jet-proof or high pressure and cold-water jet-proof luminaire		N/A
	e) no contact with live parts (IP 2X)		N/A
	e) no entry into enclosure (IP 3X and IP 4X)		N/A
	e) no contact with live parts through drain holes and ventilation slots (IP3X and IP4X)		N/A
	f) no trace of water on part of lamp requiring protection from splashing water		N/A
	g) no damage of protective shield or glass envelope		N/A
4.14 (9.3)	Humidity test 48 h	25°C, 93%RH, 48h	P

IEC 60598-2-4			
Clause	Requirement + Test	Result - Remark	Verdict
4.15 (10)	INSULATION RESISTANCE AND ELECTRIC STRENGTH		P
4.15 (10.2.1)	Insulation resistance test		P
	Cable or cord covered by metal foil or replaced by a metal rod of mm Ø :		—
	Insulation resistance (MΩ):		—
	SELV or PELV:		P
	- between current-carrying parts of different polarity:		N/A
	- between current-carrying parts and mounting surface..... :	>100MΩ	P
	- between current-carrying parts and metal parts of the luminaire..... :	>100MΩ	P
	- between the outer surface of a flexible cord or cable where it is clamped in a cord anchorage and accessible metal parts..... :		N/A
	- Insulation bushings as described in Section 5		N/A
	Other than SELV or PELV:		N/A
	- between live parts of different polarity		N/A
	- between live parts and mounting surface		N/A
	- between live parts and metal parts		N/A
	- between live parts of different polarity through action of a switch..... :		N/A
	- between the outer surface of a flexible cord or cable where it is clamped in a cord anchorage and accessible metal parts..... :		N/A
	- Insulation bushings as described in Section 5		N/A
4.15 (10.2.2)	Electric strength test		P
	Dummy lamp		N/A
	Luminaires with ignitors after 24 h test		N/A
	Luminaires with manual ignitors		N/A
	Luminaires with ignitors provided with ballasts conforming to IEC 61347-2-9		N/A
	SELV or PELV:		P
	- between current-carrying parts of different polarity:		N/A
	- between current-carrying parts and mounting surface..... :	500V	P
	- between current-carrying parts and metal parts of the luminaire..... :	500V	P

IEC 60598-2-4			
Clause	Requirement + Test	Result - Remark	Verdict
	- between the outer surface of a flexible cord or cable where it is clamped in a cord anchorage and accessible metal parts..... :		N/A
	- Insulation bushings as described in Section 5 :		N/A
	Other than SELV/PELV:		N/A
	- between live parts of different polarity :		N/A
	- between live parts and mounting surface :		N/A
	- between live parts and metal parts :		N/A
	- between live parts of different polarity through action of a switch..... :		N/A
	- between the outer surface of a flexible cord or cable where it is clamped in a cord anchorage and accessible metal parts..... :		N/A
	- Insulation bushings as described in Section 5 :		N/A
4.15 (10.3)	Touch current (mA) :		N/A
	Protective conductor current (mA) :		N/A

4.16 (13)	RESISTANCE TO HEAT, FIRE AND TRACKING		P
4.16 (13.2.1)	Ball-pressure test :	See Test Table 4.16 (13.2.1)	P
4.16 (13.3.1)	Needle-flame test (10 s)..... :	See Test Table 4.16 (13.3.1)	P
4.16 (13.3.2)	Glow-wire test (650°C) :	See Test Table 4.16 (13.3.2)	P
4.16 (13.4)	Proof tracking test (IEC 60112)..... :	See Test Table 4.16 (13.4)	P

IEC 60598-2-4			
Clause	Requirement + Test	Result - Remark	Verdict

4.8 (11.2)	TABLE I: Creepage distances and clearances						N/A
Minimum distances (mm) for a.c. up to 30 kHz sinusoidal voltages							
Applicable part of IEC 60598-1 Table 11.1.A*, 11.1.B* and 11.2* and Table U.1*							
Distances	Insulation type **	Measured clearance	Required		Measured creepage	Required	
			clearance	*Table		creepage	*Table
Distance 1:							
Working voltage (V)							—
PTI					< 600 <input type="checkbox"/>	≥ 600 <input type="checkbox"/>	—
Pulse voltage or U_p if applicable (kV)					--		—
Supplementary information:							
Distance 2:							
Working voltage (V)							—
PTI					< 600 <input type="checkbox"/>	≥ 600 <input type="checkbox"/>	—
Pulse voltage or U_p if applicable (kV)					--		—
Supplementary information:							
Distance 3:							
Working voltage (V)							—
PTI					< 600 <input type="checkbox"/>	≥ 600 <input type="checkbox"/>	—
Pulse voltage or U_p if applicable (kV)							—
Supplementary information:							
** Insulation type: B – Basic; S – Supplementary; R – Reinforced. See also IEC 60598-1 Annex M.							

IEC 60598-2-4			
Clause	Requirement + Test	Result - Remark	Verdict

4.8 (11.2)	TABLE II: Creepage distances and clearances						N/A
	Minimum distances (mm) for a.c. higher than 30 kHz sinusoidal voltages						
	Applicable part of IEC 61347-1 Table 7 and 8* or IEC 60664-4 Table 1 and 2						
Distances	Insulation type **	Measured clearance	Required		Measured creepage	Required	
			clearance	*Table		creepage	*Table
Distance 1:							
Working voltage (V)							—
Frequency if applicable (kHz)							—
PTI					< 600 <input type="checkbox"/>	≥ 600 <input type="checkbox"/>	—
Peak value of the working voltage \hat{U}_{out} if applicable (kV)							—
Supplementary information:							
Distance 2:							
Working voltage (V)							—
Frequency if applicable (kHz)							—
PTI					< 600 <input type="checkbox"/>	≥ 600 <input type="checkbox"/>	—
Peak value of the working voltage \hat{U}_{out} if applicable (kV)							—
Supplementary information:							
Distance 3:							
Working voltage (V)							—
Frequency if applicable (kHz)							—
PTI					< 600 <input type="checkbox"/>	≥ 600 <input type="checkbox"/>	—
Peak value of the working voltage \hat{U}_{out} if applicable (kV)							—
Supplementary information:							
** Insulation type: B – Basic; S – Supplementary; R – Reinforced.							

IEC 60598-2-4			
Clause	Requirement + Test	Result - Remark	Verdict

4.16 (13.2.1)	TABLE: Ball Pressure Test of Thermoplastics			P
Allowed impression diameter (mm)		2	—	
Object/ Part No./ Material	Manufacturer/ trademark	Test temperature (°C)	Impression diameter (mm)	
PCB	--	125	1.0	
Lamp cover	--	75	1.1	
Lamp enclosure	--	75	1.1	
Supplementary information:				

4.16 (13.3.1)	TABLE: Needle-flame test (IEC 60695-11-5)				P
Object/ Part No./ Material	Manufacturer/ trademark	Duration of application of test flame (ta); (s)	Ignition of specified layer Yes/No	Duration of burning (tb) (s)	Verdict
PCB	--	10	No	0	P
Supplementary information:					

4.16 (13.3.2)	TABLE: Glow-wire test (IEC 60695-2-11)				P
Glow wire temperature		650°C		—	
Object/ Part No./ Material	Manufacturer/ trademark	Ignition of specified layer Yes/No	Duration of burning (tb) (s)	Verdict	
Lamp cover	--	No	0	P	
Lamp enclosure	--	No	0	P	
Supplementary information:					

4.16 (13.4)	TABLE: Proof tracking test (IEC 60112)				P
Test voltage PTI		175 V		—	
Object/ Part No./ Material	Manufacturer/ trademark	Withstand 50 drops without failure on three places or on three specimens			Verdict
Lamp cover	--	YES	YES	YES	YES
Lamp enclosure	--	YES	YES	YES	YES
Supplementary information:					

IEC 60598-2-4			
Clause	Requirement + Test	Result - Remark	Verdict

ANNEX 1	TABLE: Critical components information						P
Object / part No.	Code	Manufacturer/ trademark	Type / model	Technical data	Standard	Mark(s) of conformity ¹⁾	
Description:							
Plastic enclosure	B	SABIC INNOVATIVE	EXL9112(GG)(X)	V-0, 130°C	UL 94	UL E121562	
Lamp cover	B	Covestro Deutschland AG [PC Resins]	2805 + (z)(f1)	PC, V-2, 115°C	UL 746 UL 94	UL E41613	
Internal wire connected PCB	B	Hangzhou Lin'an Honghui Electronic Technology Co Ltd	1569	105°C, 300V, 24AWG, VW-1	UL 758	UL E525362	
-Alternative	B	Interchangeable	Interchangeable	105°C, 300V, 24AWG, VW-1	UL 758	UL	
Internal wire connected battery	B	Hangzhou Lin'an Honghui Electronic Technology Co Ltd	1007	80°C, 300Vac, 24AWG, VW-1	UL 758	UL E525362	
-Alternative	B	Interchangeable	Interchangeable	80°C, 300Vac, 24AWG, VW-1	UL 758	UL	
PCB	B	FUJIAN ERLING ELECTRONICS CO LTD	FB1A	V-0, 130°C	UL 796	UL E148234	
Battery	B	Changxing Fanya Smart Lighting Co., Ltd	FYL-INR18650E2600	3.6VDC, 2600mAh	IEC 62133-2: 2017 IEC 62133-2: 2017/AMD1: 2021	Report No.: SHES230801491301	
LED	B	JIANGSU PRAJNA ELECTRONIC INDUSTRIAL CO., LTD	L02A28351C06WD	3.0VDC, 60mA	IEC 62471 IEC TR 62778	Report No.: SZ2220802-35002E-SF	

Supplementary information:

¹⁾ Provided evidence ensures the agreed level of compliance. See OD-CB2039.

The codes above have the following meaning:

- A - The component is replaceable with another one, also certified, with equivalent characteristics
- B - The component is replaceable if authorised by the test house
- C - Integrated component tested together with the appliance
- D - Alternative component

IEC 60598-2-4			
Clause	Requirement + Test	Result - Remark	Verdict

ANNEX 2	TABLE: Thermal tests of Section 12		P
	Type reference	BK06-00080	—
	Lamp used	LED	—
	Lamp control gear used	--	—
	Mounting position of luminaire	As normal use	—
	Supply wattage (W)		—
	Supply current (A)		—
	Temperatures in test 1 - 4 below are corrected for ta (°C)	25°C	—
	- abnormal operating mode		—
4.13 (12.4)	- test 1: rated voltage	3.6VDC(Battery discharge)	—
	- test 2: 1,06 times rated voltage or 1,05 times rated wattage or 1,1 times constant voltage/current	1.06x5VDC=5.3VDC (Charge and discharge mode)	—
	- test 3: Load on wiring to socket-outlet, 1,06 times voltage or 1,05 times wattage		—
	Through wiring or looping-in wiring loaded by a current of A during the test		—
4.13 (12.5)	- test 4: 1,1 times rated voltage or 1,05 times rated wattage or 1,1 times constant voltage/current or 130/150% of rated input voltage	1.5X5VDC=7.5VDC	—

Temperature measurements (°C)

Part	Ambient	Cl. 12.4 – normal				Cl. 12.5 – abnor.	
		test 1	test 2	test 3	limit	test 4	limit
Switch surface	25	29.4	30.6	--	55	--	--
Internal wire connected PCB	25	32.1	33.7	--	105	--	--
Internal wire connected battery	25	32.7	34.8	--	80	--	--
Battery surface	25	31.2	33.5	--	60	--	--
PCB near U3	25	40.6	42.9	--	130	--	--
PCB near U2	25	39.4	41.5	--	130	--	--
Lamp cover	25	35.3	36.7	--	75	--	--
Plastic enclosure	25	32.1	33.3	--	75	--	--
Mounting surface	25	25.2	25.3	--	90	26.4	130
Lighted object (0,1m)	25	29.0	30.2	--	90	32.3	175

Supplementary information:

IEC 60598-2-4			
Clause	Requirement + Test	Result - Remark	Verdict

ANNEX 3	Screw terminals (part of the luminaire)		N/A
(14)	SCREW TERMINALS		N/A
(14.2)	Type of terminal..... :		—
	Rated current (A)..... :		—
(14.3.2.1)	One or more conductors		N/A
(14.3.2.2)	Special preparation		N/A
(14.3.2.3)	Terminal size		N/A
	Cross-sectional area (mm ²)..... :		—
(14.3.3)	Conductor space (mm)..... :		N/A
(14.4)	Mechanical tests		N/A
(14.4.1)	Minimum distance		N/A
(14.4.2)	Cannot slip out		N/A
(14.4.3)	Special preparation		N/A
(14.4.4)	Nominal diameter of thread (metric ISO thread) :	M	N/A
	External wiring		N/A
	No soft metal		N/A
(14.4.5)	Corrosion		N/A
(14.4.6)	Nominal diameter of thread (mm) :		N/A
	Torque (Nm) :		N/A
(14.4.7)	Between metal surfaces		N/A
	Lug terminal		N/A
	Mantle terminal		N/A
	Pull test; pull (N) :		N/A
(14.4.8)	Without undue damage		N/A

IEC 60598-2-4			
Clause	Requirement + Test	Result - Remark	Verdict

ANNEX 4	Screwless terminals (part of the luminaire)		N/A
(15)	SCREWLESS TERMINALS		N/A
(15.2)	Type of terminal..... :		—
	Rated current (A)..... :		—
(15.3.1)	Material		N/A
(15.3.2)	Clamping		N/A
(15.3.3)	Stop		N/A
(15.3.4)	Unprepared conductors		N/A
(15.3.5)	Pressure on insulating material		N/A
(15.3.6)	Clear connection method		N/A
(15.3.7)	Clamping independently		N/A
(15.3.8)	Fixed in position		N/A
(15.3.10)	Conductor size		N/A
	Type of conductor		N/A
(15.5)	Terminals and connections for internal wiring		N/A
(15.5.1)	Mechanical tests		N/A
(15.5.1.1.1)	Pull test spring-type terminals (4 N, 4 samples)		N/A
(15.5.1.1.2)	Pull test pin or tab terminals (4 N, 4 samples)		N/A
	Insertion force not exceeding 50 N		N/A
(15.5.1.2)	Permanent connections: pull-off test (20 N)		N/A
(15.5.2)	Electrical tests		N/A
	Voltage drop (mV) after 1 h (4 samples)..... :		N/A
	Voltage drop of two inseparable joints		N/A
	Number of cycles:		—
	Voltage drop (mV) after 10th alt. 25th cycle (4 samples)..... :		N/A
	Voltage drop (mV) after 50th alt. 100th cycle (4 samples)..... :		N/A
	After ageing, voltage drop (mV) after 10th alt. 25th cycle (4 samples)		N/A
	After ageing, voltage drop (mV) after 50th alt. 100th cycle (4 samples)		N/A
(15.6)	Terminals and connections for external wiring		N/A
(15.6.1)	Conductors		N/A
	Terminal size and rating		N/A

IEC 60598-2-4			
Clause	Requirement + Test	Result - Remark	Verdict
15.6.2	Mechanical tests		N/A
(15.6.2.1)	Pull test spring-type terminals or welded connections (4 samples); pull (N)		N/A
(15.6.2.2)	Pull test pin or tab terminals (4 samples); pull (N)		N/A
(15.6.3)	Electrical tests		N/A
	Tests according 15.6.3.1 + 15.6.3.2 in IEC 60598-1		N/A

(15.6.3.1) (15.6.3.2)	TABLE: Contact resistance test / Heating tests										N/A
	Voltage drop (mV) after 1 h										—
terminal	1	2	3	4	5	6	7	8	9	10	
voltage drop (mV)											
	Voltage drop of two inseparable joints										N/A
	Voltage drop after 10th alt. 25th cycle										N/A
	Max. allowed voltage drop (mV)										—
terminal	1	2	3	4	5	6	7	8	9	10	
voltage drop (mV)											
	Voltage drop after 50th alt. 100th cycle										N/A
	Max. allowed voltage drop (mV)										—
terminal	1	2	3	4	5	6	7	8	9	10	
voltage drop (mV)											
	Continued ageing: voltage drop after 10th alt. 25th cycle										N/A
	Max. allowed voltage drop (mV)										—
terminal	1	2	3	4	5	6	7	8	9	10	
voltage drop (mV)											
	Continued ageing: voltage drop after 50th alt. 100th cycle										N/A
	Max. allowed voltage drop (mV)										—
terminal	1	2	3	4	5	6	7	8	9	10	
voltage drop (mV)											
Supplementary information:											

IEC 60598-2-4			
Clause	Requirement + Test	Result - Remark	Verdict

List of test equipment used:

A completed list of used test equipment shall be provided in the Test Reports when a Customer's Testing Facility according to CTF stage 1 or CTF stage 2 procedure has been used.

Note: This page may be removed when CTF stage 1 or CTF stage 2 are not used. See also clause 4.8 in OD 2020 for more details.

Clause	Measurement / testing	Testing / measuring equipment / material used, (Equipment ID)	Range used	Last Calibration date	Calibration due date

IEC60598_2_4I - ATTACHMENT			
Clause	Requirement + Test	Result - Remark	Verdict
ATTACHMENT TO TEST REPORT IEC 60598-2-4 EUROPEAN GROUP DIFFERENCES AND NATIONAL DIFFERENCES Luminaires Part 2: Particular requirements Section 4: Portable general purpose luminaires			
Differences according to		EN 60598-2-4:2018 used in conjunction with EN IEC 60598-1:2021+A11:2022	
TRF template used		IECEE OD-2020-F2:2020, Ed. 1.1	
Attachment Form No.		EU_GD_IEC60598_2_4I_II	
Attachment Originator		IMQ S.p.A.	
Master Attachment		Dated 2022-07-01	
Copyright © 2022 IEC System for Conformity Testing and Certification of Electrical Equipment (IECEE), Geneva, Switzerland. All rights reserved.			
CENELEC COMMON MODIFICATIONS (EN)			P
4.6 (3)	MARKING		P
(3.2.12)	Delete the note 4		P
4.7 (4)	CONSTRUCTION		P
4.7 (4.11.6)	Electro-mechanical contact systems: electric strength test at 1 500 V		P
4.11 (5)	EXTERNAL AND INTERNAL WIRING		P
4.11 (5.2.2)	Cables equal to EN 50525		N/A
4.11 (5.2.2)	Delete paragraph 2		N/A
	Replace table 5.1 – Supply cord		N/A
4.11.4 (-)	For class I and class II portable luminaires for outdoor use, non-detachable flexible cables or cords not lighter than type H05RN-F		N/A
4.13 (12)	ENDURANCE TESTS AND THERMAL TESTS		P
4.13 (12.4.2c)	Thermal test (normal operation) see footnote c to table 12.2 relating to unsleeved fixed wiring		N/A

IEC60598_2_41 - ATTACHMENT

Clause	Requirement + Test	Result - Remark	Verdict
--------	--------------------	-----------------	---------

ZB	ANNEX ZB, SPECIAL NATIONAL CONDITIONS (EN)		P
(3.3)	DK: power supply cords of class I luminaires with label		N/A
(5.2.18)	DK: socket-outlets		N/A
(5.2.1)	CY, DK, FI, GB: type of plug		N/A
4.4.4 (-)	DK: luminaires for outdoor use classified as class II or class III		N/A

ZC	ANNEX ZC, NATIONAL DEVIATIONS (EN)		P
(4 & 5)	FR: Shuttered socket-outlets 10/16A		N/A
	FR: Safety requirements for high buildings (Arrêté du 30 décembre 2011 portant règlement de sécurité pour la construction des immeubles de grande hauteur et leur protection contre les risques d'incendie et de panique; Section VIII; Article GH 48, Eclairage) Glow-wire test for outer parts of luminaires:		N/A
	- 850°C for luminaires in stairways and horizontal travel paths		N/A
	- 650°C for indoor luminaires		P
	GB: Requirements according to United Kingdom Building Regulation		N/A

Test Report issued under the responsibility of:



TEST REPORT
IEC 61347-2-11
Part 2: Particular requirements
Section 11: Miscellaneous electronic circuits used with luminaires

Report Number: See 60598-2-4

Date of issue

Total number of pages

Name of Testing Laboratory
preparing the Report

Applicant's name

Address

Test specification:

Standard: IEC 61347-2-11:2001+A1:2017 used in conjunction with
IEC 61347-1:2015/AMD1:2017

Test procedure: --

Non-standard test method: N/A

Test Report Form No.....: IEC61347_2_11F

Test Report Form(s) Originator.....: Intertek Semko AB

Master TRF.....: Dated 2018-11-09

Copyright © 2018 IEC System of Conformity Assessment Schemes for Electrotechnical Equipment and Components (IECEE System). All rights reserved.

This publication may be reproduced in whole or in part for non-commercial purposes as long as the IECEE is acknowledged as copyright owner and source of the material. IECEE takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

If this Test Report Form is used by non-IECEE members, the IECEE/IEC logo and the reference to the CB Scheme procedure shall be removed.

This report is not valid as a CB Test Report unless signed by an approved CB Testing Laboratory and appended to a CB Test Certificate issued by an NCB in accordance with IECEE 02.

General disclaimer:

The test results presented in this report relate only to the object tested.

This report shall not be reproduced, except in full, without the written approval of the Issuing CB Testing Laboratory. The authenticity of this Test Report and its contents can be verified by contacting the NCB, responsible for this Test Report.

Test item description		
Trade Mark		
Manufacturer		
Model/Type reference		
Ratings		
Responsible Testing Laboratory (as applicable), testing procedure and testing location(s):		
<input type="checkbox"/> Testing Laboratory:		
Testing location/ address		
Tested by (name, function, signature)		
Approved by (name, function, signature) .. :		
<input type="checkbox"/> Testing procedure: CTF Stage 1:		
Testing location/ address		
Tested by (name, function, signature)		
Approved by (name, function, signature) .. :		
<input type="checkbox"/> Testing procedure: CTF Stage 2:		
Testing location/ address		
Tested by (name + signature)		
Witnessed by (name, function, signature) . :		
Approved by (name, function, signature) .. :		
<input type="checkbox"/> Testing procedure: CTF Stage 3:		
<input type="checkbox"/> Testing procedure: CTF Stage 4:		
Testing location/ address		
Tested by (name, function, signature)		
Witnessed by (name, function, signature) . :		
Approved by (name, function, signature) .. :		
Supervised by (name, function, signature) :		

List of Attachments (including a total number of pages in each attachment):

Summary of testing:

Tests performed (name of test and test clause):

Testing location:

Summary of compliance with National Differences:

List of countries addressed:

The product fulfils the requirements of EN 61347-2-11:2001/A1:2019, EN 61347-1:2015/A1:2021

Copy of marking plate

The artwork below may be only a draft. The use of certification marks on a product must be authorized by the respective NCBS that own these marks.

See Customer products for the labels



Test item particulars	
Classification of installation and use	
Supply Connection	
Possible test case verdicts:	
- test case does not apply to the test object: N/A	
- test object does meet the requirement: P (Pass)	
- test object does not meet the requirement: F (Fail)	
Testing	
Date of receipt of test item	
Date (s) of performance of tests	
General remarks:	
<p>"(See Enclosure #)" refers to additional information appended to the report. "(See appended table)" refers to a table appended to the report.</p> <p>Throughout this report a <input type="checkbox"/> comma / <input type="checkbox"/> point is used as the decimal separator.</p> <p>Clause numbers between brackets refer to clauses in IEC 61347-1</p>	
Manufacturer's Declaration per sub-clause 4.2.5 of IEC 61347-1:	
The application for obtaining a CB Test Certificate includes more than one factory location and a declaration from the Manufacturer stating that the sample(s) submitted for evaluation is (are) representative of the products from each factory has been provided.....	<input type="checkbox"/> Yes <input type="checkbox"/> Not applicable
When differences exist; they shall be identified in the General product information section.	
Name and address of factory (ies)	
General product information:	

IEC 61347-2-11			
Clause	Requirement + Test	Result - Remark	Verdict

4 (4)	GENERAL REQUIREMENTS		P
- (4)	<u>Insulation materials</u> for double or reinforced insulation according requirements in Annex N of IEC 61347-1	(see Annex N)	N/A
- (4)	Compliance of <u>independent controlgear enclosure</u> with IEC 60598-1		N/A
- (4)	<u>Built-in magnetic ballast</u> with double or reinforced insulation comply with Annex I of IEC 61347-1		N/A
- (4)	<u>Built-in electronic controlgear</u> with double or reinforced insulation comply with Annex O of IEC 61347-1	(see Annex O)	N/A
- (4)	<u>SELV controlgear</u> comply with Annex L of IEC 61347-1	(see Annex L)	N/A

6 (6)	CLASSIFICATION			P		
	Built-in controlgear	Yes	<input type="checkbox"/>	No	<input checked="" type="checkbox"/>	—
	Independent controlgear	Yes	<input type="checkbox"/>	No	<input checked="" type="checkbox"/>	—
	Integral controlgear	Yes	<input checked="" type="checkbox"/>	No	<input type="checkbox"/>	—

7 (7)	MARKING		N/A
7.1 (7.1)	Mandatory markings		N/A
	a) mark of origin		N/A
	b) model number or type reference		N/A
	d) correlation between interchangeable parts and controlgear marked		N/A
	e) rated supply voltage (V)		N/A
	supply frequency (Hz)		N/A
	supply current (A)		N/A
	f) earthing symbol, if applicable		N/A
	k) wiring diagram		N/A
	l) value of t_c		N/A
	s) SELV symbol		N/A
7.1 (-)	- control terminals identified, if applicable		N/A
	- t_a alternative to t_c if independent		N/A
7.1 (7.2)	Marking durable and legible		N/A
	Rubbing 15 s water, 15 s petroleum; marking legible		N/A

IEC 61347-2-11			
Clause	Requirement + Test	Result - Remark	Verdict

7.2 (7.1)	Information to be provided, if applicable		N/A
	h) declaration of protection against accidental contact		N/A
	i) cross-section of conductors (mm ²)		N/A
	j) number, type and wattage of lamp(s)		N/A
7.1 (7.2)	Marking durable and legible		N/A
	Rubbing 15 s water, 15 s petroleum; marking legible		N/A

8 (10)	PROTECTION AGAINST ACCIDENTAL CONTACT WITH LIVE PARTS		N/A
- (10.1)	Controlgear protected against accidental contact with live parts		N/A
- (A2)	Voltage measured with 50 kΩ	(see Annex A)	N/A
- (A3)	Voltage > 35 V peak or > 60 V d.c.	(see Annex A)	N/A
- (10.1)	Lacquer or enamel not used for protection or insulation		N/A
	Adequate mechanical strength on parts providing protection		N/A
- (10.2)	Capacitors > 0,5 μF: voltage after 1 min (V): < 50 V		N/A
- (10.3)	Controlgear providing SELV		N/A
	Accessible conductive parts are insulated from live parts by double or reinforced insulation in SELV controlgear		N/A
	No connection between output circuit and the body or protective earthing circuit		N/A
	No possibility of connection between output circuit and the body or protective earthing circuit through other conductive parts		N/A
	SELV outputs separated by at least basic insulation		N/A
	ELV conductive parts insulated as live parts		N/A
	Tests according Annex L of IEC 61347-1	(see Annex L)	N/A
- (10.4)	Accessible conductive parts in SELV circuits		N/A
	Output voltage under load ≤ 25 V r.m.s. or ≤ 60 V d.c.		N/A

IEC 61347-2-11			
Clause	Requirement + Test	Result - Remark	Verdict
	If output voltage > 25 V r.m.s. or > 60 V d.c.; No load output ≤ 35 V peak or ≤ 60 V d.c and touch current does not exceed 0,7 mA (peak) or 2 mA d.c.:		N/A
	One conductive part is insulated if output voltage or current exceeding the values above and withstand test voltage 500 V		N/A
	Double or reinforced insulation bridged by appropriate and at least two resistors or two Y2 capacitors or one Y1 capacitor		N/A
	Y1 or Y2 capacitors comply with IEC 60384-14		N/A
	Resistors comply with test (a) in 14.1 of IEC 60065		N/A

9 (8)	TERMINALS		N/A
- (8.1)	Integral terminals		N/A
	Screw terminals according section 14 of IEC 60598-1	(see Annex 2)	N/A
	Screwless terminals according section 15 of IEC 60598-1	(see Annex 3)	N/A
- (8.2)	Terminals other than integral terminals		N/A
	Comply with relevant IEC standard	(see Annex 1)	N/A
	Suit the conditions		N/A
	Satisfy additional relevant requirements of this standard		N/A

10 (9)	PROVISION FOR EARTHING		N/A
- (9.1)	Provisions for protective earthing		N/A
	Terminal complying with clause 8		N/A
	Locked against loosening and not possible to loosen by hand		N/A
	Not possible to loosen clamping means unintentionally on screwless terminals		N/A
	All parts of material minimizing the danger of electrolytic corrosion		N/A
	Made of brass or equivalent material		N/A
	Contact surface bare metal		N/A
	Test according 7.2.3 of IEC 60598-1		N/A
- (9.2)	Provision for functional earthing		N/A

IEC 61347-2-11			
Clause	Requirement + Test	Result - Remark	Verdict
	Comply with clause 8 and 9.1		N/A
	Functional earth insulated from live parts by double or reinforced insulation		N/A
- (9.3)	Lamp controlgear with conductors for protective earthing by tracks on printed circuit board		N/A
	Test with a current of 25 A between earthing terminal or earthing contact and each of the accessible metal parts; measured resistance (Ω) at ≥ 10 A according 7.2.3 of IEC 60598-1: $< 0,5 \Omega$		N/A
- (9.4)	Earthing of built-in lamp controlgear		N/A
	Earth by means of fixing to earthed metal of luminaire in compliance of 7.2 of IEC 60598-1		N/A
	Earthing terminal only for earthing the built-in controlgear		N/A
- (9.5)	Earthing via independent controlgear		N/A
- (9.5.1)	Earth connection to other equipment		N/A
	Looping or through connection, conductor min. 1,5 mm ² and of copper or equivalent		N/A
	Protective earthing wires in line with 5.3.1.1 and clause 7 of IEC 60598-1		N/A
- (9.5.2)	Earthing of the lamp compartments powered via the independent lamp controlgear		N/A
	Test with a current of 25 A between input and output earth terminals; measured resistance (Ω) between earthing terminal or earthing contact and each of the accessible metal parts at ≥ 10 A according 7.2.3 of IEC 60598-1: $< 0,5 \Omega$		N/A
	Output earthing terminal marked as in 7.1 t) of IEC 61347-1		N/A

11 (11)	MOISTURE RESISTANCE AND INSULATION		P
- (11)	After storage 48 h at 91-95% relative humidity and 20-30 °C measuring of insulation resistance:		P
	For basic insulation $\geq 2 \text{ M}\Omega$	$>100 \text{ M}\Omega$	P
	For double or reinforced insulation $\geq 4 \text{ M}\Omega$		N/A
- (11)	Between primary and secondary circuits in controlgear providing SELV, values in Annex L in IEC 61347-1		N/A

IEC 61347-2-11			
Clause	Requirement + Test	Result - Remark	Verdict
12 (12)	ELECTRIC STRENGTH		P
- (12)	Immediately after clause 11 electric strength test for 1 min		P
	Basic insulation for SELV, test voltage 500 V		P
	Working voltage ≤ 50 V, test voltage 500 V		N/A
	Working voltage > 50 V ≤ 1000 V, test voltage (V):		N/A
	Basic insulation, $2U + 1000$ V		N/A
	Supplementary insulation, $2U + 1000$ V		N/A
	Double or reinforced insulation, $4U + 2000$ V		N/A
	No flashover or breakdown		P
	Solid or thin sheet insulation for double or reinforced insulation fulfil the requirements in Annex N in IEC 61347-1		N/A

14 (14)	FAULT CONDITIONS		P
- (14.1)	When operated under fault conditions the controlgear:		P
	- does not emit flames or molten material		P
	- does not produce flammable gases		P
	- protection against accidental contact not impaired		N/A
	Thermally protected controlgear does not exceed the marked temperature value		N/A
	Fault conditions: capacitors, resistors or inductors without proof of compliance with relevant specifications have been short-circuited or disconnected	(see appended table)	P
- (14.2)	Short-circuit of creepage distances and clearances if less than specified in clause 16 in Part 1 (after any reduction in 14.2 - 14.5)	(see appended table)	P
- (14.3)	Short-circuit or interruption of semiconductor devices	(see appended table)	N/A
- (14.4)	Short-circuit across insulation consisting of lacquer, enamel or textile	(see appended table)	P
- (14.5)	Short-circuit across electrolytic capacitors	(see appended table)	P
- (14.6)	After the tests has been carried out on three samples:		P
	The insulation resistance ≥ 1 M Ω	>100 M Ω	P
	No flammable gases		P
	No accessible parts have become live		P

IEC 61347-2-11			
Clause	Requirement + Test	Result - Remark	Verdict
	During the tests, a five-layer tissue paper, where the test specimen is wrapped, does not ignite		P
- (14.7)	Relevant fault condition tests with high-power a.c. supply		—

15 (15)	CONSTRUCTION		P
- (15.1)	Wood, cotton, silk, paper and similar fibrous material		P
	Wood, cotton, silk, paper and similar fibrous material not used as insulation		P
- (15.2)	Printed circuits		P
	Printed circuits used as internal connections complies with clause 14		P
- (15.3)	Plugs and socket-outlets used in SELV or ELV circuits		N/A
	No dangerous compatibility between output socket-outlet and a plug for socket-outlets for input circuit in relation to installation rules, voltages and frequencies		N/A
	Plugs and socket-outlets for SELV comply with IEC 60906-3 and IEC 60884-2-4		N/A
	Plugs and socket-outlets for SELV ≤ 3 A, ≤ 25 V r.m.s. or ≤ 60 V d.c. and ≤ 72 W comply with IEC 60906-3 and IEC 60884-2-4 or:		N/A
	- plugs not able to enter socket-outlets of other standardised system		N/A
	- socket-outlets not admit plugs of other standardised system		N/A
	- socket-outlets without protective earth		N/A
- (15.4)	Insulation between circuits and accessible parts		P
- (15.4.2)	SELV circuits		P
	Source used to supply SELV circuits:		N/A
	- safety isolating transformer in accordance with relevant part 2 of IEC 61558		N/A
	- controlgear providing SELV in accordance with relevant part 2 of IEC 61347		P
	- another source		N/A
	Voltage in the circuit not higher than ELV		N/A
	SELV circuits insulated from LV by double or reinforced insulation		N/A
	SELV circuits insulated from non SELV circuits by double or reinforced insulation		N/A

IEC 61347-2-11			
Clause	Requirement + Test	Result - Remark	Verdict
	SELV circuits insulated from FELV circuits by supplementary insulation		N/A
	SELV circuits insulated from other SELV circuits by basic insulation		N/A
	SELV circuits insulated from accessible conductive parts according Table 6 in 15.4.5		N/A
- (15.4.3)	FELV circuits		N/A
	Source used to supply FELV circuits:		N/A
	- separating transformer in accordance with relevant part 2 of IEC 61558		N/A
	- separating controlgear providing basic insulation between input and output circuits in accordance with relevant part 2 of IEC 61347		N/A
	- another source		N/A
	- source in circuits separated by the LV supply by basic insulation		N/A
	Voltage in the circuit not higher than ELV		N/A
	FELV circuits insulated from LV supply by at least basic insulation		N/A
	FELV circuits insulated from other FELV circuits if functional purpose		N/A
	FELV circuits insulated from accessible conductive parts according Table 6 in 15.4.5		N/A
	Plugs and socket-outlets for FELV system comply with:		N/A
	- plugs not able to enter socket-outlets of other voltage systems		N/A
	- socket-outlets not admit plugs of other voltage systems		N/A
	- socket-outlets have a protective conductor contact		N/A
- (15.4.4)	Other circuits		N/A
	Insulation between circuits other than SELV or FELV and accessible conductive parts in according Table 6 in 15.4.5.		N/A
- (15.4.5)	Insulation between circuits and accessible conductive parts		N/A
	Accessible conductive parts insulated from active parts of electric circuits by insulating according Table 6		N/A
	Requirements for Class II construction with equipotential bonding for protection against indirect contact with live parts:		N/A

IEC 61347-2-11			
Clause	Requirement + Test	Result - Remark	Verdict
	- all conductive parts are connected together		N/A
	- conductive parts are reliably connected together according test of IEC 60598-1 cl. 7.2.3		N/A
	- conductive parts comply with requirements of Annex A in case of insulation fault		N/A

16 (16)	CREEPAGE DISTANCES AND CLEARANCES		N/A
- (16)	Creepage distances and clearances according to 16.2 and 16.3		N/A
	Controlgears providing SELV comply with additional requirements in Annex L	(see Annex L)	N/A
	Insulating lining of metallic enclosures		N/A
	Controlgear protected against pollution comply with Annex P	(see Annex P)	N/A
- (16.2)	Creepage distances		N/A
- (16.2.2)	Minimum creepage distances for working voltages		N/A
	Creepage distances according to Table 7	(see appended table)	N/A
- (16.2.3)	Creepage distances for working voltages with frequencies above 30 kHz		N/A
	Creepage distances according to Table 8	(see appended table)	N/A
- (16.3)	Clearances		N/A
- (16.3.2)	Clearances for working voltages		N/A
	Clearances distances according to Table 9	(see appended table)	N/A
- (16.3.3)	Clearances for ignition voltages and working voltages with higher frequencies		N/A
	Clearances distances for basic or supplementary insulation according to Table 10	(see appended table)	N/A
	Clearances distances for reinforced insulation according to Table 11	(see appended table)	N/A

17 (17)	SCREWS, CURRENT-CARRYING PARTS AND CONNECTIONS		P
- (17)	Screws, current-carrying parts and connections in compliance with IEC 60598-1 (clause numbers between parentheses refer to IEC 60598-1)		P
(4.11)	Electrical connections		P
(4.11.1)	Contact pressure		P
(4.11.2)	Screws:		N/A
	- self-tapping screws		N/A
	- thread-cutting screws		N/A
(4.11.3)	Screw locking:		N/A

IEC 61347-2-11			
Clause	Requirement + Test	Result - Remark	Verdict
	- spring washer		N/A
	- rivets		N/A
(4.11.4)	Material of current-carrying parts		P
(4.11.5)	No contact to wood or mounting surface		P
(4.11.6)	Electro-mechanical contact systems		N/A
(4.12)	Mechanical connections and glands		N/A
(4.12.1)	Screws not made of soft metal		N/A
	Screws of insulating material		N/A
	Torque test: torque (Nm); part		N/A
	Torque test: torque (Nm); part		N/A
	Torque test: torque (Nm); part		N/A
(4.12.2)	Screws with diameter < 3 mm screwed into metal		N/A
(4.12.4)	Locked connections:		N/A
	- fixed arms; torque (Nm).....		N/A
	- lampholder; torque (Nm).....		N/A
	- push-button switches; torque 0,8 Nm		N/A
(4.12.5)	Screwed glands; force (Nm)		N/A
18 (18)	RESISTANCE TO HEAT, FIRE AND TRACKING		P
- (18.1)	Ball-pressure test	See Test Table 18 (18.1)	N/A
- (18.2)	Test of printed boards	See Test Table 18 (18.2)	P
- (18.3)	Glow-wire test	See Test Table 18 (18.3)	N/A
- (18.4)	Needle flame test	See Test Table 18 (18.4)	N/A
- (18.5)	Tracking test	See Test Table 18 (18.5)	N/A
19 (19)	RESISTANCE TO CORROSION		N/A
	- test according 4.18.1 of IEC 60598-1		N/A
	- adequate varnish on the outer surface		N/A
20 (-)	ANNEXES		P
	Comply with appropriate annexes of IEC 61347-1	(see Annexes)	P

IEC 61347-2-11			
Clause	Requirement + Test	Result - Remark	Verdict
14	TABLE: tests of fault conditions		P
Part	Simulated fault		Hazard
DGN-MZ-CDB-DM-10B-V4			
R4	Short circuit, Unit shutdown, recoverable.		YES/NO
C3	Short circuit, Unit shutdown, recoverable.		YES/NO
U3 pin(3, 5)	Short circuit, Unit shutdown, recoverable.		YES/NO
DGN-MZ-DY-DM-10B-V5			
C1	Short circuit, Unit shutdown, recoverable.		YES/NO
U1 pin(1, 3)	Short circuit, Unit shutdown, recoverable.		YES/NO
U2 pin(1, 2)	Short circuit, Unit shutdown, recoverable.		YES/NO
RS2	Short circuit, Unit shutdown, recoverable.		YES/NO
Output	Short circuit, Unit shutdown, recoverable.		YES/NO

IEC 61347-2-11			
Clause	Requirement + Test	Result - Remark	Verdict

16 (16)	TABLE: creepage distance and clearance (mm)							N/A
Applicable part of IEC 61347-1 Table 7 – 11*								
Distances	Insulation type **	Measured clearance	Required		Measured creepage	Required		
			clearance	*Table		creepage	*Table	
Distance 1:								
Working voltage (V)							—	
Frequency if applicable (kHz)							—	
PTI			< 600 <input type="checkbox"/>		≥ 600 <input type="checkbox"/>		—	
Peak value of the working voltage \hat{U}_{out} if applicable (kV)							—	
Pulse voltage if applicable (kV)							—	
Supplementary information:								
Distance 2:								
Working voltage (V)							—	
Frequency if applicable (kHz)							—	
PTI			< 600 <input type="checkbox"/>		≥ 600 <input type="checkbox"/>		—	
Peak value of the working voltage \hat{U}_{out} if applicable (kV)							—	
Pulse voltage if applicable (kV)							—	
Supplementary information:								
Distance 3:								
Working voltage (V)							—	
Frequency if applicable (kHz)							—	
PTI			< 600 <input type="checkbox"/>		≥ 600 <input type="checkbox"/>		—	
Peak value of the working voltage \hat{U}_{out} if applicable (kV)							—	
Pulse voltage if applicable (kV)							—	
Supplementary information:								

** Insulation type: B – Basic; S – Supplementary; R – Reinforced

IEC 61347-2-11			
Clause	Requirement + Test	Result - Remark	Verdict

18 (18.1)	TABLE: Ball Pressure Test			N/A
Allowed impression diameter (mm)		2mm		—
Object/ Part No./ Material	Manufacturer/ trademark	Test temperature (°C)	Impression diameter (mm)	
See 60598				
Supplementary information:				

18 (18.2)	TABLE: Test of printed boards				P
Object/ Part No./ Material	Manufacturer/ trademark	Duration of application of test flame (s)	Ignition of specified layer Yes/No	Duration of burning (s)	Verdict
PCB	--	10	No	0	P
Supplementary information:					

18 (18.3)	TABLE: Glow-wire test			N/A
Glow wire temperature.....		650°C		—
Object/ Part No./ Material	Manufacturer/ trademark	Ignition of specified layer Yes/No	Duration of burning (s)	Verdict
Supplementary information:				

IEC 61347-2-11			
Clause	Requirement + Test	Result - Remark	Verdict

18 (18.4)	TABLE: Needle-flame test				N/A
Object/ Part No./ Material	Manufacturer/ trademark	Duration of application of test flame (s)	Ignition of specified layer Yes/No	Duration of burning (s)	Verdict
See 60598					
Supplementary information:					

18 (18.5)	TABLE: Proof tracking test				N/A
Object/ Part No./ Material	Manufacturer/ trademark	Withstand 50 drops without failure on three places or on three specimens		Verdict	
Test voltage PTI		175 V		—	
Supplementary information:					

IEC 61347-2-11			
Clause	Requirement + Test	Result - Remark	Verdict

(A)	ANNEX A - TEST TO ESTABLISH WHETHER A CONDUCTIVE PART IS A LIVE PART WHICH MAY CAUSE AN ELECTRIC SHOCK		N/A
(A.1)	Comply with A.2 or A.3		N/A
(A.2)	Voltage ≤ 35 V peak or ≤ 60 V d.c		N/A
(A.3)	If voltage measured according Clause A.2 exceeds the limit value; touch current does not exceed 0,7 mA (peak) or 2 mA d.c.		N/A

(C)	ANNEX C – PARTICULAR REQUIREMENTS FOR ELECTRONIC LAMP CONTROLGEAR WITH MEANS OF PROTECTION AGAINST OVERHEATING		N/A
(C3)	GENERAL REQUIREMENTS		N/A
(C3.1)	Thermal protection means integral with the convertor, protected against mechanical damage		N/A
	Renewable only by means of a tool		N/A
	If function depending on polarity, for cord-connected equipment protection means in both leads		N/A
	Thermal links comply with IEC 60691		N/A
	Electrical controls comply with IEC 60730-2-3		N/A
(C3.2)	No risk of fire by breaking (clause C7)		N/A
(C5)	CLASSIFICATION		N/A
	a) automatic resetting type		—
	b) manual resetting type		—
	c) non-renewable, non-resetting type		—
	d) renewable, non-resetting type		—
	e) other type of thermal protection; description .. :		—
(C6)	MARKING		N/A
(C6.1)	Symbol for temperature declared thermally protected ballasts		N/A
(C6.2)	Declaration of the type of protection provided		N/A
(C7)	LIMITATION OF HEATING		N/A
(C7.1)	Preselection test:		N/A
	Test sample placed for at least 12 h in an oven having temperature ($t_c - 5$) K		N/A
	No operation of the protection device		N/A

IEC 61347-2-11			
Clause	Requirement + Test	Result - Remark	Verdict

(C7.2)	Functioning of protection means:		N/A
	Normal operation of the sample in a test enclosure according to Annex D at an ambient temperature such that ($t_c +0; -5$) °C is obtained		N/A
	No operation of the protection device		N/A
	Introducing of the most onerous test condition determined during test of clause 14.2 to 14.5		N/A
	Output of windings connected to the mains supply short-circuited, and other part of the controlgear operated under normal conditions		N/A
	Increasing of the current through the windings continuously until operation of the protection means		N/A
	Continuous measuring of the highest surface temperature		N/A
	Ballasts according to C5 a) or C5 e) operated until stable conditions are achieved		N/A
	Automatic-resetting thermal protectors working 3 times		N/A
	Ballasts according to C5 b) working 6 times		N/A
	Ballasts according to C5 c) and C5) d) working once		N/A
	Highest temperature does not exceed the marked value		N/A
	Any overshoot of 10% over the marked value within 15 min		N/A
	After 15 min value not exceed marked value		N/A

(D)	ANNEX D – REQUIREMENTS FOR CARRY OUT THE HEATING TESTS OF THERMALLY PROTECTED LAMP CONTROLGEAR		N/A
	Tests in C7 performed in accordance with Annex D, if applicable		N/A

(F)	ANNEX F - DRAUGHT-PROOF ENCLOSURE		N/A
	Draught-proof enclosure in accordance with the description		N/A
	Dimensions of the enclosure		N/A
	Other design; description		N/A

IEC 61347-2-11			
Clause	Requirement + Test	Result - Remark	Verdict
(H)	ANNEX H - TESTS		P
	All tests performed in accordance with the advice given in Annex H, if applicable		P
(I)	ANNEX I – ADDITIONAL REQUIREMENTS FOR BUILT-IN MAGNETIC BALLASTS WITH DOUBLE OR REINFORCED INSULATION		N/A
(I.6)	Symbol on ballasts with double or reinforced insulation		N/A
	Symbol explained in manufacturers catalogue		N/A
(I.9)	No protective earthing terminal		N/A
(I.12)	Devices for limiting the temperature bridged		—
	After the test according clause 13		N/A
	At least six of seven ballast start the lamp and the current not exceed 115%		N/A
	Insulation resistance not less than 4 MΩ between winding and case for all ballasts		N/A
	All ballasts withstand electric strength test reduced to 35% of values in Table 1 of IEC 61347-1		N/A
(I.15)	Built-in ballasts with double or reinforced insulation comply with corresponding values of creepage and clearances in IEC 60598-1		N/A
(L)	ANNEX L - PARTICULAR ADDITIONAL REQUIREMENTS FOR CONTROLGEARS PROVIDING SELV		N/A
(L.3)	Classification		N/A
	Class I	Yes <input type="checkbox"/> No <input type="checkbox"/>	—
	Class II	Yes <input type="checkbox"/> No <input type="checkbox"/>	—
	Class III	Yes <input type="checkbox"/> No <input type="checkbox"/>	—
	non-inherently short circuit proof controlgear	Yes <input type="checkbox"/> No <input checked="" type="checkbox"/>	—
	inherently short circuit proof controlgear	Yes <input type="checkbox"/> No <input checked="" type="checkbox"/>	—
	fail safe controlgear	Yes <input type="checkbox"/> No <input type="checkbox"/>	—
	non-short-circuit proof controlgear	Yes <input type="checkbox"/> No <input type="checkbox"/>	—
(L.4)	Marking		N/A
	Adequate symbols are used		N/A
(L.5)	Protection against electric shock		N/A
	Comply with clause 9.2 of IEC 61558-1		N/A

IEC 61347-2-11			
Clause	Requirement + Test	Result - Remark	Verdict
(L.6)	Heating		N/A
	No excessive temperatures in normal use		N/A
	Value if capacitor t_c marked		—
	Winding insulation classified as Class		—
	Comply with tests of clause 14 of IEC 61558-1 with adjustments		N/A
(L.7)	Short-circuit and overload protection		N/A
	Comply with tests of clause 15 of IEC 61558-1 with adjustments		N/A
(L.8)	Insulation resistance and electric strength		N/A
(L.8.1)	Conditioned 48 h between 91 % and 95 %		N/A
(L.8.2)	Insulation resistance		N/A
	Between input- and output circuits not less than 5 M Ω		N/A
	Between metal parts of class II convertors which are separated from live parts by basic insulation only and the body not less than 5 M Ω		N/A
	Between metal foil in contact with the inner and outer surfaces of enclosures of insulating material not less than 2 M Ω		N/A
(L.8.3)	Electric strength		N/A
	1) Between live parts of input circuits and live parts of output circuits		N/A
	2) Over basic or supplementary insulation between:		N/A
	a) live parts having different polarity		N/A
	b) live parts and body if intended to be connected to protective earth		N/A
	c) accessible metal parts and a metal rod of the same diameter as the flexible cable or cord		N/A
	d) live parts and an intermediate metal part		N/A
	e) intermediate metal parts and the body		N/A
	f) each input circuit and all other input circuits ...		N/A
	3) Over reinforced insulation between the body and live parts		N/A
(L.9)	Construction		N/A
(L.9.1)	Transformer comply with 19.12 of IEC 61558-1 and 19 of IEC 61558-2-6		N/A
	HF transformer comply with 19 of IEC 61558-2-16		N/A

IEC 61347-2-11			
Clause	Requirement + Test	Result - Remark	Verdict

(L.10)	Components		N/A
	Protective devices comply with 20.6 – 20.11 of IEC 61558-1		N/A
(L.11)	Creepage distances, clearances and distances through insulation		N/A
	Creepage distances and clearances not less than in Clause 16		N/A
	Distance through insulation according Table L.5 in IEC 61347-1		N/A
	1) Basic distance through insulation		N/A
	Required distance (mm)		—
	Measured (mm)		N/A
	Supplementary information		—
	2) Supplementary distance through insulation		N/A
	Required distance (mm)		—
	Measured (mm)		N/A
	Supplementary information		—
	3) Reinforced distance through insulation		N/A
	Required distance (mm)		—
	Measured (mm)		N/A
	Supplementary information		—

(N)	ANNEX N - REQUIREMENTS FOR INSULATION MATERIALS USED FOR DOUBLE OR REINFORCED INSULATION		N/A
(N.4)	General requirements		N/A
(N.4.1)	Material comply with IEC 60085 and IEC 60216 series		N/A
(N.4.2)	Solid insulation		N/A
	Electric strength test at least 5 kV or 1,35 x test voltage in Table N.1		N/A
	If not classified according IEC 60085 and IEC 60216 series: Electric strength test increased 10 % to 5,5 kV or 1,5 x test voltage in Table N.1		N/A
(N.4.3)	Thin sheet insulation		N/A
(N.4.3.1)	Thickness and composition of thin sheet insulation		N/A
	- Inside the ballast and not subjected to handling or abrasion during the production and during maintenance		N/A

IEC 61347-2-11			
Clause	Requirement + Test	Result - Remark	Verdict
	- Non-separated layers: Min. 3 layers and fulfil mandrel test of 150N		N/A
	- Separated layers: Min. 2 layers and each layer fulfil mandrel test of 50N		N/A
	- Separated layers (alternative): Min. 3 layers and 2/3 of the layers fulfil mandrel test of 100N		N/A
(N.4.3.2)	Mandrel test (electric strength test during mechanical stress)		N/A
	Electric strength test after mandrel test:		N/A
	- Non-separated layers: min. 5 kV or 1,35 x test voltage in Table N.1		N/A
	- 2/3 of min. 3 separated layers: min. 5 kV or 1,25 x test voltage in Table N.1		N/A
	- one of 2 separated layers: min. 5 kV or 1,25 x test voltage in Table N.1		N/A
	No flashover or breakdown occurred		N/A

(O)	ANNEX O - ADDITIONAL REQUIREMENTS FOR BUILT-IN ELECTRONIC CONTROLGEAR WITH DOUBLE OR REINFORCED INSULATION		N/A
(O.6)	Marking		N/A
	Marking according clause 7 (7)	See clause 7	N/A
	Special symbol		N/A
	Meaning of the special symbol explained in catalogue		N/A
(O.7)	Protection against accidental contact with live parts		N/A
	Requirements of clause 8 (10)	See clause 8	N/A
	Test finger not possible to make contact with basic insulated metal parts		N/A
(O.8)	Terminals		N/A
	Clause 9 (8)	See clause 9	N/A
(O.9)	Provision for earthing		N/A
	Functional earthing terminals comply with clause 9 of part 1		N/A
	No protective earthing terminal		N/A
(O.10)	Moisture resistance and insulation		N/A
	Clause 11 (11)	See clause 11	N/A
(O.11)	Electric strength		N/A
	Clause 12 (12)	See clause 12	N/A

IEC 61347-2-11			
Clause	Requirement + Test	Result - Remark	Verdict
(O.13)	Fault conditions		N/A
	Clause - (14)	See clause 14	N/A
	End of test, between live part and accessible metal parts or external parts of insulating material in contact with the supporting surface comply with dielectric strength test reduced to 35 % of values according Table 3 in part 1		N/A
	Insulation resistance according to Cl.10 between live part and accessible metal parts or external parts of insulating material in contact with the supporting surface not less than 4 MΩ		N/A
(O.14)	Construction		N/A
	Clause 17 (15)	See clause 17	N/A
	Accessible metal parts insulated from live parts by double or reinforced insulation		N/A
	Live part insulated from supporting surface in contact with external faces by double or reinforced insulation		N/A
(O.15)	Creepage distances and clearances		N/A
	Clause 18 (16)	See clause 18	N/A
	Comply with corresponding values for luminaries in IEC 60598-1		N/A
(O.16)	Screws, current-carrying parts and connections		N/A
	Clause 19 (17)	See clause 19	N/A
(O.17)	Resistance to heat and fire		N/A
	Clause 20 (18)	See clause 20	N/A
(O.18)	Resistance to corrosion		N/A
	Clause 21 (19)	See clause 21	N/A

(P)	ANNEX P - Creepage distances and clearances and distance through isolation (DTI) for lamp controlgear which are protected against pollution by the use of coating or potting		N/A
(P.1)	General		N/A
	P.2 applies if creepage distances less than the minimum in Table 7 and 8		N/A
	P.3 applies if clearance less than the minimum in Table 9, 10 and 11		N/A
(P.2)	Creepage distances		N/A
(P.2.2)	Minimum creepage distances for working voltages and rated voltages with frequencies up to 30 kHz (Table P.1)		N/A

IEC 61347-2-11			
Clause	Requirement + Test	Result - Remark	Verdict
	Basic or supplementary insulation:		N/A
	Required creepage		—
	Measured		N/A
	Supplementary information		—
	Reinforced insulation:		N/A
	Required creepage		—
	Measured		N/A
	Supplementary information		—
(P.2.3)	Creepage distances for working voltages with frequencies above 30 kHz (Table P.2)		N/A
	Voltage \hat{U}_{out} kV		—
	Frequency		—
	Required distance		—
	Measured		N/A
	Supplementary information		—
(P.2.4)	Compliance with the required creepage distances		N/A
(P.2.4.1)	Compliance in accordance with 16.3.3 and test according P.2.4.2		N/A
(P.2.4.3)	Electrical tests after conditioning		N/A
(P.2.4.3.1)	Insulation resistance and electric strength according Clause 11 and 12		N/A
(P.3)	Distance through isolation		N/A
(P.3.4)	Electrical tests after conditioning		N/A
(P.3.4.1)	Insulation resistance and electric strength according Clause 11 and 12		N/A
(P.3.4.2)	Impulse voltage dielectrical test		N/A
	Basic or supplementary insulation:		N/A
	Working/rated voltage		—
	Impulse voltage		N/A
	Supplementary information		—
	Reinforced insulation:		N/A
	Working/rated voltage		—
	Impulse voltage		N/A
	Supplementary information		—

IEC 61347-2-11			
Clause	Requirement + Test	Result - Remark	Verdict

ANNEX 2	Screw terminals (part of the controlgear)	N/A
(14)	SCREW TERMINALS (IEC 60598-1)	N/A
(14.2)	Type of terminal	—
	Rated current (A)	—
(14.3.2.1)	One or more conductors	N/A
(14.3.2.2)	Special preparation	N/A
(14.3.2.3)	Terminal size	N/A
	Cross-sectional area (mm ²)	—
(14.3.3)	Conductor space (mm)	N/A
(14.4)	Mechanical tests	N/A
(14.4.1)	Minimum distance	N/A
(14.4.2)	Cannot slip out	N/A
(14.4.3)	Special preparation	N/A
(14.4.4)	Nominal diameter of thread (metric ISO thread).....	M
	External wiring	N/A
	No soft metal	N/A
(14.4.5)	Corrosion	N/A
(14.4.6)	Nominal diameter of thread (mm)	N/A
	Torque (Nm).....	N/A
(14.4.7)	Between metal surfaces	N/A
	Lug terminal	N/A
	Mantle terminal	N/A
	Pull test; pull (N).....	N/A
(14.4.8)	Without undue damage	N/A

IEC 61347-2-11			
Clause	Requirement + Test	Result - Remark	Verdict

ANNEX 3	Screwless terminals (part of the controlgear)		N/A
(15)	SCREWLESS TERMINALS (IEC 60598-1)		N/A
(15.2)	Type of terminal..... :		—
	Rated current (A)..... :		—
(15.3.1)	Material		N/A
(15.3.2)	Clamping		N/A
(15.3.3)	Stop		N/A
(15.3.4)	Unprepared conductors		N/A
(15.3.5)	Pressure on insulating material		N/A
(15.3.6)	Clear connection method		N/A
(15.3.7)	Clamping independently		N/A
(15.3.8)	Fixed in position		N/A
(15.3.10)	Conductor size		N/A
	Type of conductor		N/A
(15.5)	Terminals and connections for internal wiring		N/A
(15.5.1)	Mechanical tests		N/A
(15.5.1.1.1)	Pull test spring-type terminals (4 N, 4 samples)		N/A
(15.5.1.1.2)	Pull test pin or tab terminals (4 N, 4 samples)		N/A
	Insertion force not exceeding 50 N		N/A
(15.5.1.2)	Permanent connections: pull-off test (20 N)		N/A
(15.5.2)	Electrical tests		N/A
	Voltage drop (mV) after 1 h (4 samples)..... :		N/A
	Voltage drop of two inseparable joints		N/A
	Number of cycles:		—
	Voltage drop (mV) after 10th alt. 25th cycle (4 samples)..... :		N/A
	Voltage drop (mV) after 50th alt. 100th cycle (4 samples)..... :		N/A
	After ageing, voltage drop (mV) after 10th alt. 25th cycle (4 samples)		N/A
	After ageing, voltage drop (mV) after 50th alt. 100th cycle (4 samples)		N/A
(15.6)	Terminals and connections for external wiring		N/A
(15.6.1)	Conductors		N/A

IEC 61347-2-11			
Clause	Requirement + Test	Result - Remark	Verdict

	Terminal size and rating		N/A
15.6.2	Mechanical tests		N/A
(15.6.2.1)	Pull test spring-type terminals or welded connections (4 samples); pull (N)		N/A
(15.6.2.2)	Pull test pin or tab terminals (4 samples); pull (N)		N/A
(15.6.3)	Electrical tests		N/A
	Tests according 15.6.3.1 + 15.6.3.2 in IEC 60598-1		N/A

(15.6.3.1) (15.6.3.2)	TABLE: Contact resistance test / Heating tests										N/A
	Voltage drop (mV) after 1 h										—
terminal	1	2	3	4	5	6	7	8	9	10	
voltage drop (mV)											
	Voltage drop of two inseparable joints										N/A
	Voltage drop after 10th alt. 25th cycle										N/A
	Max. allowed voltage drop (mV)										—
terminal	1	2	3	4	5	6	7	8	9	10	
voltage drop (mV)											
	Voltage drop after 50th alt. 100th cycle										N/A
	Max. allowed voltage drop (mV)										—
terminal	1	2	3	4	5	6	7	8	9	10	
voltage drop (mV)											
	Continued ageing: voltage drop after 10th alt. 25th cycle										N/A
	Max. allowed voltage drop (mV)										—
terminal	1	2	3	4	5	6	7	8	9	10	
voltage drop (mV)											
	Continued ageing: voltage drop after 50th alt. 100th cycle										N/A
	Max. allowed voltage drop (mV)										—
terminal	1	2	3	4	5	6	7	8	9	10	
voltage drop (mV)											
Supplementary information:											

IEC 61347-2-11			
Clause	Requirement + Test	Result - Remark	Verdict

List of test equipment used:

A completed list of used test equipment shall be provided in the Test Reports when a Manufacturer Testing Laboratory according to CTF stage 1 or CTF stage 2 procedure has been used.

Other forms with a different layout but containing corresponding information are also acceptable.

Note: This page may be removed when CTF stage 1 CTF stage 2 are not used. See also clause 4.8 in OD 2020 for more details.

Clause	Measurement / testing	Testing / measuring equipment / material used, (Equipment ID)	Range used	Last Calibration date	Calibration due date

Test Report issued under the responsibility of:




TEST REPORT IEC 62031 LED modules for general lighting – Safety specifications	
Report Number	See 60598-2-4
Date of issue	
Total number of pages	
Name of Testing Laboratory preparing the Report	
Applicant's name	
Address	
Test specification:	
Standard	IEC 62031:2018
Test procedure	CB Scheme
Non-standard test method	N/A
Test Report Form No.	
Test Report Form(s) Originator	
Master TRF	
Copyright © 2018 IEC System of Conformity Assessment Schemes for Electrotechnical Equipment and Components (IECEE System). All rights reserved.	
This publication may be reproduced in whole or in part for non-commercial purposes as long as the IECEE is acknowledged as copyright owner and source of the material. IECEE takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.	
If this Test Report Form is used by non-IECEE members, the IECEE/IEC logo and the reference to the CB Scheme procedure shall be removed.	
This report is not valid as a CB Test Report unless signed by an approved CB Testing Laboratory and appended to a CB Test Certificate issued by an NCB in accordance with IECEE 02.	
General disclaimer:	
The test results presented in this report relate only to the object tested. This report shall not be reproduced, except in full, without the written approval of the Issuing CB Testing Laboratory. The authenticity of this Test Report and its contents can be verified by contacting the NCB, responsible for this Test Report.	

Test item description..... :		
Trade Mark..... :		
Manufacturer..... :		
Model/Type reference..... :		
Ratings..... :		
Responsible Testing Laboratory (as applicable), testing procedure and testing location(s):		
<input type="checkbox"/> CB Testing Laboratory:		
Testing location/ address..... :		
Tested by (name, function, signature)..... :		
Approved by (name, function, signature).... :		
Testing procedure: CTF Stage 1:		
Testing location/ address..... :		
Tested by (name, function, signature)..... :		
Approved by (name, function, signature).... :		
Testing procedure: CTF Stage 2:		
Testing location/ address..... :		
Tested by (name + signature)..... :		
Witnessed by (name, function, signature) . :		
Approved by (name, function, signature).... :		
Testing procedure: CTF Stage 3:		
Testing procedure: CTF Stage 4:		
Testing location/ address..... :		
Tested by (name, function, signature)..... :		
Witnessed by (name, function, signature) . :		
Approved by (name, function, signature).... :		
Supervised by (name, function, signature) :		

List of Attachments (including a total number of pages in each attachment):	
Summary of testing:	
Tests performed (name of test and test clause):	Testing location:
Summary of compliance with National Differences:	
List of countries addressed	
<input checked="" type="checkbox"/> The product fulfils the requirements of EN IEC 62031:2020+A11:2021	

Copy of marking plate:

The artwork below may be only a draft. The use of certification marks on a product must be authorized by the respective NCBs that own these marks.

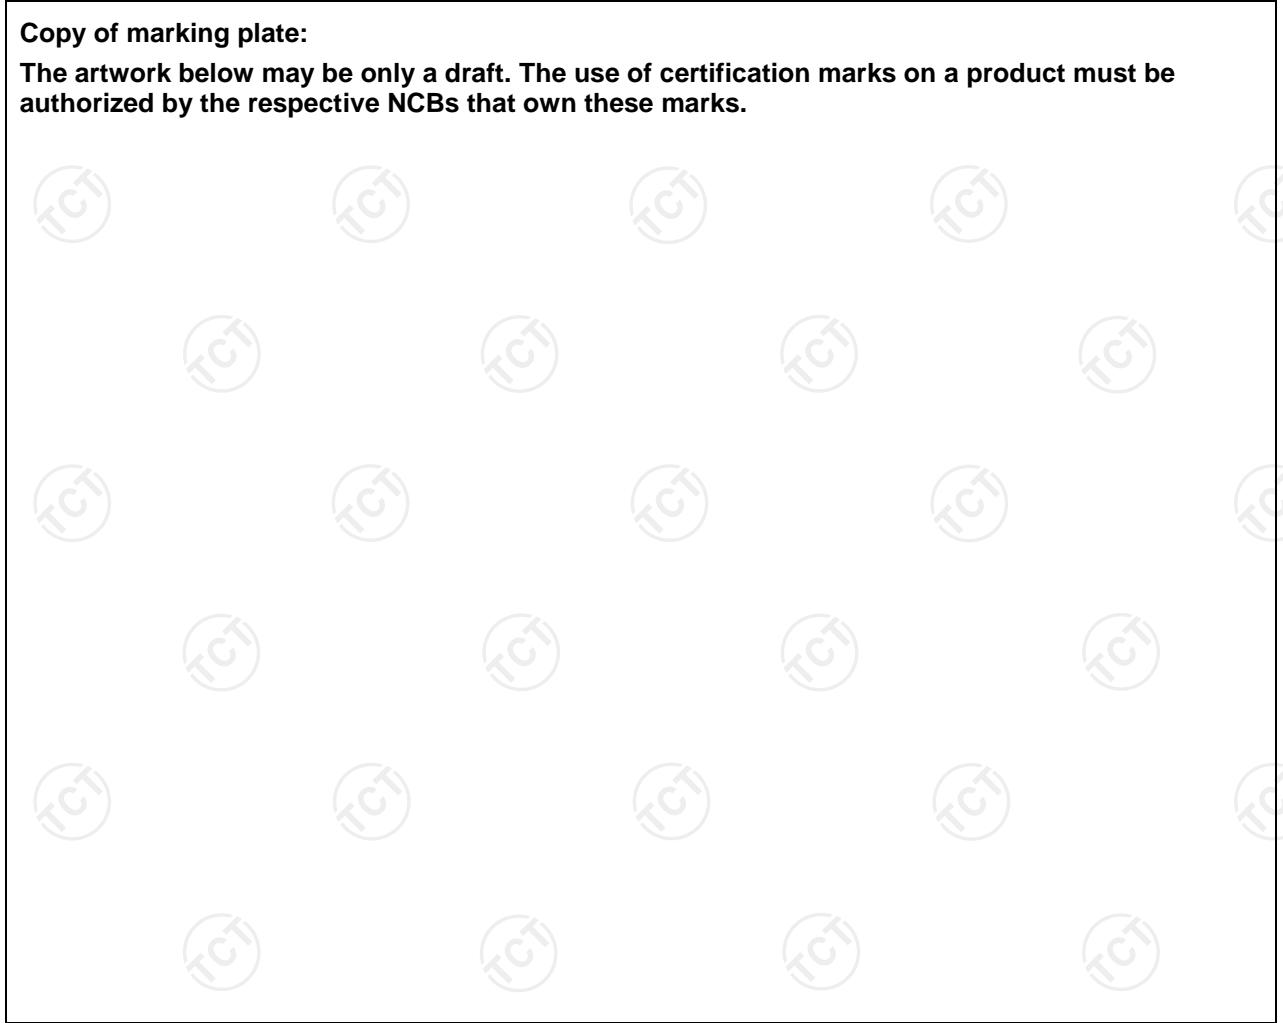

Test item particulars:	
Classification of installation and use:	
Supply Connection	
.....:	
Possible test case verdicts:	
- test case does not apply to the test object..... : N/A	
- test object does meet the requirement..... : P (Pass)	
- test object does not meet the requirement..... : F (Fail)	
Testing:	
Date of receipt of test item	
Date (s) of performance of tests	
.....:	
General remarks:	
"(See Enclosure #)" refers to additional information appended to the report. "(See appended table)" refers to a table appended to the report.	
Throughout this report a <input type="checkbox"/> comma / <input type="checkbox"/> point is used as the decimal separator.	
Clause numbers between brackets refer to clauses in IEC 61347-1	
Manufacturer's Declaration per sub-clause 4.2.5 of IEC 61347-1:	
The application for obtaining a CB Test Certificate includes more than one factory location and a declaration from the Manufacturer stating that the sample(s) submitted for evaluation is (are) representative of the products from each factory has been provided	<input type="checkbox"/> Yes <input type="checkbox"/> Not applicable
When differences exist; they shall be identified in the General product information section.	
Name and address of factory (ies)	
.....	
General product information:	
.....	

IEC 62031			
Clause	Requirement + Test	Result - Remark	Verdict
4	GENERAL REQUIREMENTS		P
4.2	Classification		—
	Built-in module : Yes <input type="checkbox"/> No <input checked="" type="checkbox"/>		—
	Independent module..... : Yes <input type="checkbox"/> No <input checked="" type="checkbox"/>		—
	Integral module : Yes <input checked="" type="checkbox"/> No <input type="checkbox"/>		—
4.6	Independent modules comply with requirements in IEC 60598-1:2014/AMD1:2017		N/A
4.8	Modules with integrated controlgear providing SELV comply with requirements according to IEC 61347-1:2015/AMD1:2017 clause L.5 to L.11.	(see Annex 1)	N/A
6	MARKING		N/A
7	TERMINALS		N/A
7.1	Integral terminals		N/A
	Screw terminals comply with section 14 of IEC 60598-1	(see Annex 3)	N/A
	Screwless terminals comply with section 15 of IEC 60598-1	(see Annex 4)	N/A
7.2	Terminals other than integral terminals		N/A
	Separately approved; component list	(see Annex 2)	N/A
	Ratings suit the conditions		N/A
	Satisfy additional relevant requirements of this standard		N/A
8 (9)	EARTHING		N/A
- (9.1)	Provisions for protective earthing		N/A
	Terminal complying with clause 8		N/A
	Locked against loosening and not possible to loosen by hand		N/A
	Not possible to loosen clamping means unintentionally on screwless terminals		N/A
	Earthing via means of fixing		N/A
	Earthing terminal only used for the earthing of the control gear		N/A
	All parts of material minimizing the danger of electrolytic corrosion		N/A
	Made of brass or equivalent material		N/A
	Contact surface bare metal		N/A

IEC 62031			
Clause	Requirement + Test	Result - Remark	Verdict
	Test according 7.2.3 of IEC 60598-1		N/A
- (9.2)	Provision for functional earthing		N/A
	Comply with clause 8 and 9.1		N/A
	Functional earth insulated from live parts by double or reinforced insulation		N/A
- (9.3)	Lamp controlgear with conductors for protective earthing by tracks on printed circuit board		N/A
	Test with a current of 25 A between earthing terminal and each of the accessible metal parts; measured resistance (Ω) at ≥ 10 A according 7.2.3 of IEC 60598-1: $< 0,5 \Omega$		N/A
- (9.4)	Earthing of built-in lamp controlgear		N/A
	Earth by means of fixing to earthed metal of luminaire in compliance of 7.2 of IEC 60598-1		N/A
	Earthing terminal only for earthing the built-in controlgear		N/A
- (9.5)	Earthing via independent controlgear		N/A
- (9.5.1)	Earth connection to other equipment		N/A
	Looping or through connection, conductor min. 1,5 mm ² and of copper or equivalent		N/A
	Protective earthing wires in line with 5.3.1.1 and clause 7		N/A
- (9.5.2)	Earthing of the lamp compartments powered via the independent lamp controlgear		N/A
	Test with a current of 25 A between input and output earth terminals; measured resistance (Ω) between earthing terminal and each of the accessible metal parts at ≥ 10 A according 7.2.3 of IEC 60598-1: $< 0,5 \Omega$		N/A
	Output earthing terminal marked as in 7.1 t) of IEC 61347-1		N/A
9 (10)	PROTECTION AGAINST ACCIDENTAL CONTACT WITH LIVE PARTS		N/A
10 (11)	MOISTURE RESISTANCE AND INSULATION		P
	After storage 48 h at 91-95% relative humidity and 20-30 °C measuring of insulation resistance with d.c. 500 V (M Ω):		P
	For basic insulation ≥ 2 M Ω	>100 M Ω	P
	For double or reinforced insulation ≥ 4 M Ω		N/A
	Between primary and secondary circuits in controlgear providing SELV, values in Annex L in IEC 61347-1		N/A

IEC 62031			
Clause	Requirement + Test	Result - Remark	Verdict

11 (12)	ELECTRIC STRENGTH		P
	Immediately after clause 11 electric strength test for 1 min		P
	Basic insulation for SELV, test voltage 500 V		P
	Working voltage ≤ 50 V, test voltage 500 V		N/A
	Working voltage > 50 V ≤ 1000 V, test voltage (V):		N/A
	Basic insulation, $2U + 1000$ V		N/A
	Supplementary insulation, $2U + 1000$ V		N/A
	Double or reinforced insulation, $4U + 2000$ V		N/A
	No flashover or breakdown		P
	Solid or thin sheet insulation for double or reinforced insulation fulfil the requirements in Annex N in IEC 61347-1		N/A

12 (14)	FAULT CONDITIONS		P
- (14.1)	When operated under fault conditions the controlgear:		P
	- does not emit flames or molten material		P
	- does not produce flammable gases		P
	- protection against accidental contact not impaired		P
	Thermally protected controlgear does not exceed the marked temperature value		N/A
	Fault conditions: capacitors, resistors or inductors without proof of compliance with relevant specifications have been short-circuited or disconnected	(see appended table)	P
- (14.2)	Short-circuit of creepage distances and clearances if less than specified in clause 16 in Part 1 (after any reduction in 14.2 - 14.5)	(see appended table)	N/A
- (14.3)	Short-circuit or interruption of semiconductor devices	(see appended table)	P
- (14.4)	Short-circuit across insulation consisting of lacquer, enamel or textile	(see appended table)	P
- (14.5)	Short-circuit across electrolytic capacitors	(see appended table)	N/A
	Short-circuit or interruption of SPDs	(see appended table)	N/A
- (14.6)	After the tests has been carried out on three samples:		P
	The insulation resistance ≥ 1 M Ω	>100 M Ω	P
	No flammable gases		P
	No accessible parts have become live		P

IEC 62031			
Clause	Requirement + Test	Result - Remark	Verdict
	During the tests, a five-layer tissue paper, where the test specimen is wrapped, does not ignite		P
- (14.7)	Relevant fault condition tests with high-power a.c. supply and in turn to a d.c. supply		—
12.2	Overpower condition		P
	Module withstands overpower condition >15 min.		P
	Module with automatic protective device or power limiter, test performed 15 min. at limit.		N/A
	No fire, smoke or flammable gas is produced		P
	Molten material does not ignite tissue paper, spread below the module		P
14 (15)	CONSTRUCTION		P
- (15.1)	Wood, cotton, silk, paper and similar fibrous material		P
	Wood, cotton, silk, paper and similar fibrous material not used as insulation		P
- (15.2)	Printed circuits		N/A
	Printed circuits used as internal connections complies with clause 14		N/A
15 (16)	CREEPAGE DISTANCES AND CLEARANCES		N/A
- (16.1)	General		N/A
	Creepage distances and clearances according to 16.2 and 16.3		N/A
	Controlgears providing SELV comply with additional requirements in Annex L		N/A
	Insulating lining of metallic enclosures		N/A
	Controlgear protected against pollution comply with Annex P		N/A
- (16.2)	Creepage distances		N/A
- (16.2.2)	Minimum creepage distances for working voltages		N/A
	Creepage distances according to Table 7	(see appended table)	N/A
- (16.2.3)	Creepage distances for working voltages with frequencies above 30 kHz		N/A
	Creepage distances according to Table 8	(see appended table)	N/A
- (16.3)	Clearances		N/A
- (16.3.2)	Clearances for working voltages		N/A
	Clearances distances according to Table 9	(see appended table)	N/A
- (16.3.3)	Clearances for ignition voltages and working voltages with higher frequencies		N/A

IEC 62031			
Clause	Requirement + Test	Result - Remark	Verdict
	Clearances distances for basic or supplementary insulation according to Table 10		N/A
	Clearances distances for reinforced insulation according to Table 11		N/A
16 (17)	SCREWS, CURRENT-CARRYING PARTS AND CONNECTIONS		P
	Screws, current-carrying parts and connections in compliance with IEC 60598-1 (clause numbers between parentheses refer to IEC 60598-1)		—
(4.11)	Electrical connections		P
(4.11.1)	Contact pressure		P
(4.11.2)	Screws:		N/A
	- self-tapping screws		N/A
	- thread-cutting screws		N/A
(4.11.3)	Screw locking:		N/A
	- spring washer		N/A
	- rivets		N/A
(4.11.4)	Material of current-carrying parts		P
(4.11.5)	No contact to wood or mounting surface		N/A
(4.11.6)	Electro-mechanical contact systems		N/A
(4.12)	Mechanical connections and glands		N/A
(4.12.1)	Screws not made of soft metal		N/A
	Screws of insulating material		N/A
	Torque test: torque (Nm); part.....:		N/A
	Torque test: torque (Nm); part.....:		N/A
	Torque test: torque (Nm); part.....:		N/A
(4.12.2)	Screws with diameter < 3 mm screwed into metal		N/A
(4.12.4)	Locked connections:		N/A
	- fixed arms; torque (Nm)		N/A
	- lampholder; torque (Nm)		N/A
	- push-button switches; torque 0,8 Nm		N/A
(4.12.5)	Screwed glands; force (Nm).....:		N/A
17 (18)	RESISTANCE TO HEAT, FIRE AND TRACKING		N/A
- (18.1)	Ball-pressure test	See Test Table 17 (18.1)	N/A
- (18.2)	Test of printed boards	See Test Table 17 (18.2)	N/A
- (18.3)	Glow-wire test (650°C)	See Test Table 17 (18.3)	N/A

IEC 62031			
Clause	Requirement + Test	Result - Remark	Verdict
- (18.4)	Needle-flame test (10 s)	See Test Table 17 (18.4)	N/A
- (18.5)	Proof tracking test	See Test Table 17 (18.5)	N/A
18	RESISTANCE TO CORROSION		N/A
	Comply with requirements according 4.18 of IEC 60598-1		N/A
20	HEAT MANAGEMENT		N/A
20.1	General		N/A
	Fulfil clause 20 if replaceable LED module and when heat conducting thermal interface is needed.		N/A
20.2	Thermal interface material		N/A
	Thermal interface material delivered with the module if necessary		N/A
20.3	Heat protection		N/A
	Not impair safety when operated under poor heat-conduction conditions according Annex D		N/A
22	PHOTOBIOLOGICAL SAFETY		P
22.1	UV radiation		N/A
	Luminous radiation not exceed 2mW/klm		N/A
22.2	Blue light hazard		P
	Assessed according to IEC TR 62778		P
22.3	Infrared radiation		N/A
	Requirements for infrared radiation when required		N/A
A	ANNEX A - TESTS		P
	All tests performed in accordance with the advice given in Annex H of IEC 61347-1, if applicable		P
12 (14)	TABLE: tests of fault conditions		P
Part	Simulated fault		Hazard
DGN-MZ-CDB-DM-10B-V4			
R5	Short-circuited, Unit shutdown immediately, recoverable.		YES/NO
C3	Short-circuited, Unit shutdown immediately, recoverable.		YES/NO
U3 pin(3, 4)	Short-circuited, Unit shutdown immediately, recoverable.		YES/NO
DGN-MZ-DY-DM-10B-V5			

IEC 62031			
Clause	Requirement + Test	Result - Remark	Verdict
C1	Short-circuited, Unit shutdown immediately, recoverable.		YES/NO
U1 pin(1, 2)	Short-circuited, Unit shutdown immediately, recoverable.		YES/NO
U2 pin(1, 8)	Short-circuited, Unit shutdown immediately, recoverable.		YES/NO
RS1	Short-circuited, Unit shutdown immediately, recoverable.		YES/NO

15 (16)	TABLE: clearance and creepage distance measurements (mm)						N/A
Applicable part of IEC 61347-1 Table 7 – 11*							
Distances	Insulation type **	Measured clearance	Required		Measured creepage	Required	
			clearance	*Table		creepage	*Table
Distance 1:							
Working voltage (V)							—
Frequency if applicable (kHz)							—
PTI.....					< 600 <input type="checkbox"/> ≥ 600 <input type="checkbox"/>		—
Peak value of the working voltage \hat{U}_{out} if applicable (kV)							—
Pulse voltage if applicable (kV)							—
Supplementary information:							
Distance 2:							
Working voltage (V)							—
Frequency if applicable (kHz)							—
PTI.....					< 600 <input type="checkbox"/> ≥ 600 <input type="checkbox"/>		—
Peak value of the working voltage \hat{U}_{out} if applicable (kV)							—
Pulse voltage if applicable (kV)							—
Supplementary information:							
Distance 3:							
Working voltage (V)							—
Frequency if applicable (kHz)							—
PTI.....					< 600 <input type="checkbox"/> ≥ 600 <input type="checkbox"/>		—
Peak value of the working voltage \hat{U}_{out} if applicable (kV)							—
Pulse voltage if applicable (kV)							—
Supplementary information:							

** Insulation type: B – Basic; S – Supplementary; R – Reinforced

IEC 62031			
Clause	Requirement + Test	Result - Remark	Verdict

17 (18.1)	TABLE: Ball Pressure Test of Thermoplastics			N/A
Allowed impression diameter (mm)		2	—	
Object/ Part No./ Material	Manufacturer/ trademark	Test temperature (°C)	Impression diameter (mm)	
Supplementary information:				

17 (18.2)	TABLE: Test of printed boards				N/A
Object/ Part No./ Material	Manufacturer/ trademark	Duration of application of test flame (s)	Ignition of specified layer Yes/No	Duration of burning (s)	Verdict
Supplementary information:					

17 (18.3)	TABLE: Glow-wire test				N/A
Glow wire temperature		650°C		—	
Object/ Part No./ Material	Manufacturer/ trademark	Duration of application of test flame (ta); (s)	Ignition of specified layer Yes/No	Duration of burning (tb) (s)	Verdict
Any flame or glowing of the sample extinguished within 30 s of withdrawing the glow-wire, and any burning or molten drop did not ignite the underlying parts (Yes/No)					
Supplementary information:					

17 (18.4)	TABLE: Needle-flame test				N/A
Object/ Part No./ Material	Manufacturer/ trademark	Duration of application of test flame (ta); (s)	Ignition of specified layer Yes/No	Duration of burning (tb) (s)	Verdict
Supplementary information:					

IEC 62031			
Clause	Requirement + Test	Result - Remark	Verdict

17 (18.5)	TABLE: Proof tracking test			N/A
Test voltage PTI	175 V			—
Object/ Part No./ Material	Manufacturer/ trademark	Withstand 50 drops without failure on three places or on three specimens		Verdict
Supplementary information:				

(A)	ANNEX A - TEST TO ESTABLISH WHETHER A CONDUCTIVE PART IS A LIVE PART WHICH MAY CAUSE AN ELECTRIC SHOCK			N/A
(A.1)	Comply with A.2 or A.3			N/A
(A.2)				N/A
				N/A
				N/A

IEC 62031			
Clause	Requirement + Test	Result - Remark	Verdict
ANNEX 1	LED MODULES WITH INTEGRAL CONTROLGEAR PROVIDING SELV		N/A
(L.5)	Protection against electric shock		N/A
	Comply with 9.2 of IEC 61558-1		N/A
(L.6)	Heating		N/A
	No excessive temperatures in normal use		N/A
	Value if capacitor tc marked		—
	Winding insulation classified as Class		—
	Comply with tests of clause 14 of IEC 61558-1 with adjustments		N/A
(L.7)	Short-circuit and overload protection		N/A
	Comply with tests of clause 15 of IEC 61558-1 with adjustments		N/A
(L.8)	Insulation resistance and electric strength		N/A
(L.8.1)	Conditioned 48 h between 91 % and 95 %		N/A
(L.8.2)	Insulation resistance		N/A
	Between input- and output circuits not less than 5 MΩ		N/A
	Between metal parts of class II convertors which are separated from live parts by basic insulation only and the body not less than 5 MΩ		N/A
	Between metal foil in contact with the inner and outer surfaces of enclosures of insulating material not less than 2 MΩ		N/A
(L.8.3)	Electric strength		N/A
	1) Between live parts of input circuits and live parts of output circuits		N/A
	2) Over basic or supplementary insulation between:		N/A
	a) live parts having different polarity		N/A
	b) live parts and body if intended to be connected to protective earth		N/A
	c) accessible metal parts and a metal rod of the same diameter as the flexible cable or cord		N/A
	d) live parts and an intermediate metal part		N/A
	e) intermediate metal parts and the body		N/A
	f) each input circuit and all other input circuits		N/A
	3) Over reinforced insulation between the body and live parts		N/A
(L.9)	Construction		N/A

IEC 62031			
Clause	Requirement + Test	Result - Remark	Verdict
(L.9.1)	Transformer comply with 19.12 of IEC 61558-1 and 19 of IEC 61558-2-6		N/A
	HF transformer comply with 19 of IEC 61558-2-16		N/A
(L.10)	Components		N/A
	Protective devices comply with 20.6 – 20.11 of IEC 61558-1		N/A
(L.11)	Creepage distances, clearances and distances through insulation		N/A
	Creepage distances and clearances not less than in Clause 16		N/A
	Distance through insulation according Table L.5 in IEC 61347-1		N/A
	1) Basic distance through insulation		N/A
	Required distance (mm)		—
	Measured (mm)		N/A
	Supplementary information		—
	2) Supplementary distance through insulation		N/A
	Required distance (mm)		—
	Measured (mm)		N/A
	Supplementary information		—
	3) Reinforced distance through insulation		N/A
	Required distance (mm)		—
	Measured (mm)		N/A
	Supplementary information		—

IEC 62031			
Clause	Requirement + Test	Result - Remark	Verdict

ANNEX 3	Screw terminals (part of the luminaire)		N/A
(14)	SCREW TERMINALS		N/A
(14.2)	Type of terminal.....:		—
	Rated current (A).....:		—
(14.3.2.1)	One or more conductors		N/A
(14.3.2.2)	Special preparation		N/A
(14.3.2.3)	Terminal size		N/A
	Cross-sectional area (mm ²).....:		—
(14.3.3)	Conductor space (mm).....:		N/A
(14.4)	Mechanical tests		N/A
(14.4.1)	Minimum distance		N/A
(14.4.2)	Cannot slip out		N/A
(14.4.3)	Special preparation		N/A
(14.4.4)	Nominal diameter of thread (metric ISO thread)	M	N/A
	External wiring		N/A
	No soft metal		N/A
(14.4.5)	Corrosion		N/A
(14.4.6)	Nominal diameter of thread (mm)		N/A
	Torque (Nm)		N/A
(14.4.7)	Between metal surfaces		N/A
	Lug terminal		N/A
	Mantle terminal		N/A
	Pull test; pull (N)		N/A
(14.4.8)	Without undue damage		N/A

IEC 62031			
Clause	Requirement + Test	Result - Remark	Verdict

ANNEX 4	Screwless terminals (part of the luminaire)		N/A
(15)	SCREWLESS TERMINALS		N/A
(15.2)	Type of terminal..... :		—
	Rated current (A)..... :		—
(15.3.1)	Material		N/A
(15.3.2)	Clamping		N/A
(15.3.3)	Stop		N/A
(15.3.4)	Unprepared conductors		N/A
(15.3.5)	Pressure on insulating material		N/A
(15.3.6)	Clear connection method		N/A
(15.3.7)	Clamping independently		N/A
(15.3.8)	Fixed in position		N/A
(15.3.10)	Conductor size		N/A
	Type of conductor		N/A
(15.5.1)	Terminals internal wiring		N/A
(15.5.1.1)	Pull test spring-type terminals (4 N, 4 samples)		N/A
(15.5.1.2)	Pull test pin or tab terminals (4 N, 4 samples)		N/A
	Insertion force not exceeding 50 N		N/A
(15.5.1.2)	Permanent connections: pull-off test (20 N)		N/A
(15.5.2)	Electrical tests		N/A
	Voltage drop (mV) after 1 h (4 samples)..... :		N/A
	Voltage drop of two inseparable joints		N/A
	Number of cycles:		—
	Voltage drop (mV) after 10th alt. 25th cycle (4 samples)..... :		N/A
	Voltage drop (mV) after 50th alt. 100th cycle (4 samples)..... :		N/A
	After ageing, voltage drop (mV) after 10th alt. 25th cycle (4 samples)		N/A
	After ageing, voltage drop (mV) after 50th alt. 100th cycle (4 samples)		N/A
(15.6)	Terminals and connections for external wiring		N/A
(15.6.1)	Conductors		N/A
	Terminal size and rating		N/A
(15.6.2)	Mechanical tests		N/A

IEC 62031			
Clause	Requirement + Test	Result - Remark	Verdict
(15.6.2.1)	Pull test spring-type terminals or welded connections (4 samples); pull (N)		N/A
(15.6.2.2)	Pull test pin or tab terminals (4 samples); pull (N)		N/A
(15.6.3)	Electrical tests		N/A
	Tests according 15.6.3.1 + 15.6.3.2 in IEC 60598-1		N/A

(15.6.3.1) (15.6.3.2)	TABLE: Contact resistance test / Heating tests										N/A
	Voltage drop (mV) after 1 h										—
terminal	1	2	3	4	5	6	7	8	9	10	
voltage drop (mV)											
	Voltage drop of two inseparable joints										
	Voltage drop after 10th alt. 25th cycle										N/A
	Max. allowed voltage drop (mV)										—
terminal	1	2	3	4	5	6	7	8	9	10	
voltage drop (mV)											
	Voltage drop after 50th alt. 100th cycle										
	Max. allowed voltage drop (mV)										—
terminal	1	2	3	4	5	6	7	8	9	10	
voltage drop (mV)											
	Continued ageing: voltage drop after 10th alt. 25th cycle										N/A
	Max. allowed voltage drop (mV)										—
terminal	1	2	3	4	5	6	7	8	9	10	
voltage drop (mV)											
	Continued ageing: voltage drop after 50th alt. 100th cycle										N/A
	Max. allowed voltage drop (mV)										—
terminal	1	2	3	4	5	6	7	8	9	10	
voltage drop (mV)											
Supplementary information:											

IEC 62031			
Clause	Requirement + Test	Result - Remark	Verdict

List of test equipment used:

A completed list of used test equipment shall be provided in the Test Reports when a Manufacturer Testing Laboratory according to CTF stage 1 or CTF stage 2 procedure has been used. Other forms with a different layout but containing corresponding information are also acceptable. Note: This page may be removed when CTF stage 1 CTF stage 2 are not used. See also clause 4.8 in OD 2020 for more details.

Clause	Measurement / testing	Testing / measuring equipment / material used, (Equipment ID)	Range used	Last Calibration date	Calibration due date

IEC62031F - ATTACHMENT			
Clause	Requirement + Test	Result - Remark	Verdict
ATTACHMENT TO TEST REPORT IEC 62031:2018 EUROPEAN GROUP DIFFERENCES AND NATIONAL DIFFERENCES (LED modules for general lighting - Safety specifications)			
Differences according to: EN IEC 62031:2020+A11:2021			
TRF template used.....: IECEE OD-2020-F2:2022, Ed. 1.2			
Attachment Form No.: EU_GD_IEC62031F			
Attachment Originator.....: UL Solutions (Demko)			
Master Attachment: Dated 2022-09-30			
Copyright © 2022 IEC System for Conformity Testing and Certification of Electrical Equipment (IECEE), Geneva, Switzerland. All rights reserved.			
	CENELEC COMMON MODIFICATIONS (EN)		P
	No Common modifications		P
ZA	ANNEX ZA, NORMATIVE REFERENCES TO INTERNATIONAL PUBLICATIONS WITH THEIR CORRESPONDING EUROPEAN PUBLICATIONS		P
ZZ	ANNEX ZZ, RELATIONSHIP BETWEEN THIS EUROPEAN STANDARD AND THE SAFETY OBJECTIVES OF DIRECTIVE 2014/35/EU [2014 OJ L96] AIMED TO BE COVERED		N/A

Photo 1- External view



Photo 2- External view



Photo 3- External view

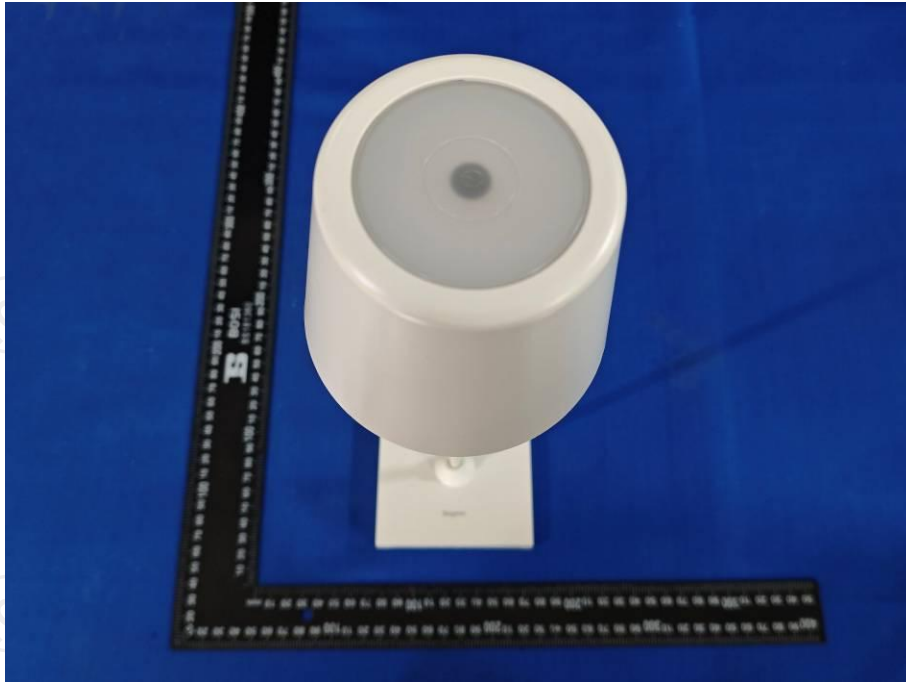


Photo 4- External view



Photo 5- External view

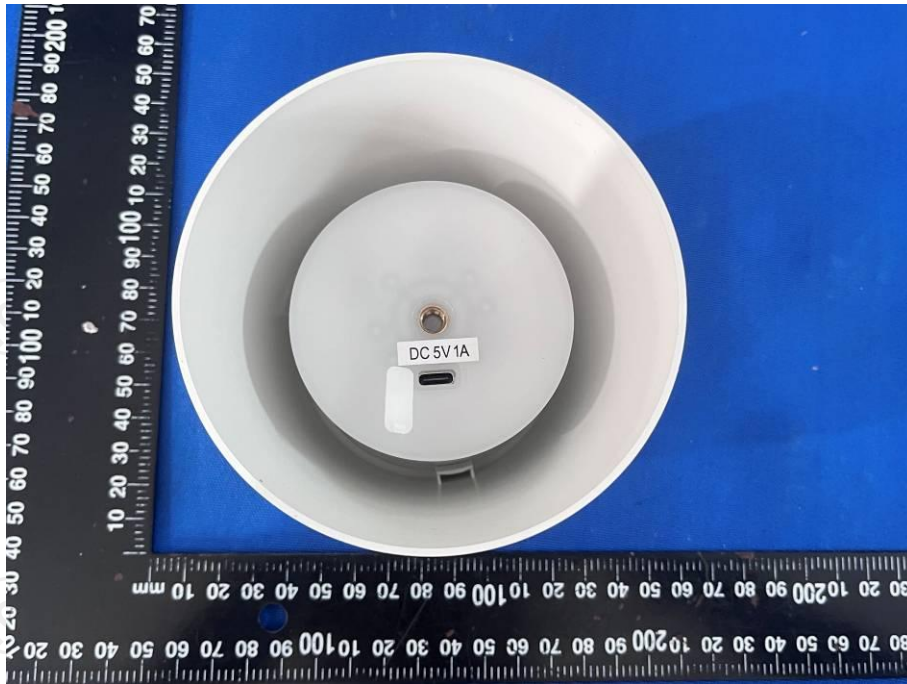


Photo 6- Internal view

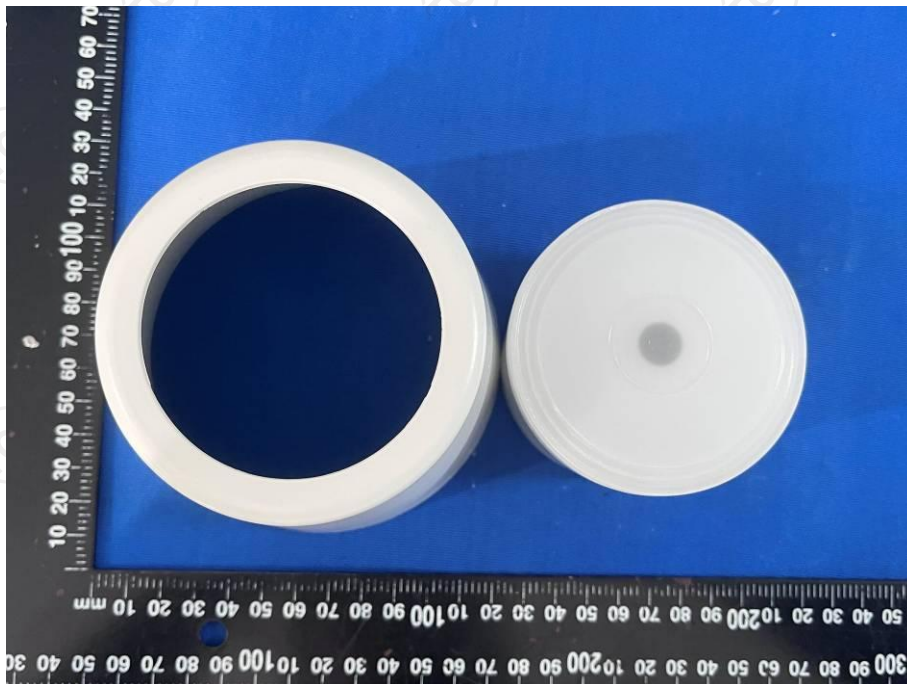


Photo 7- Internal view

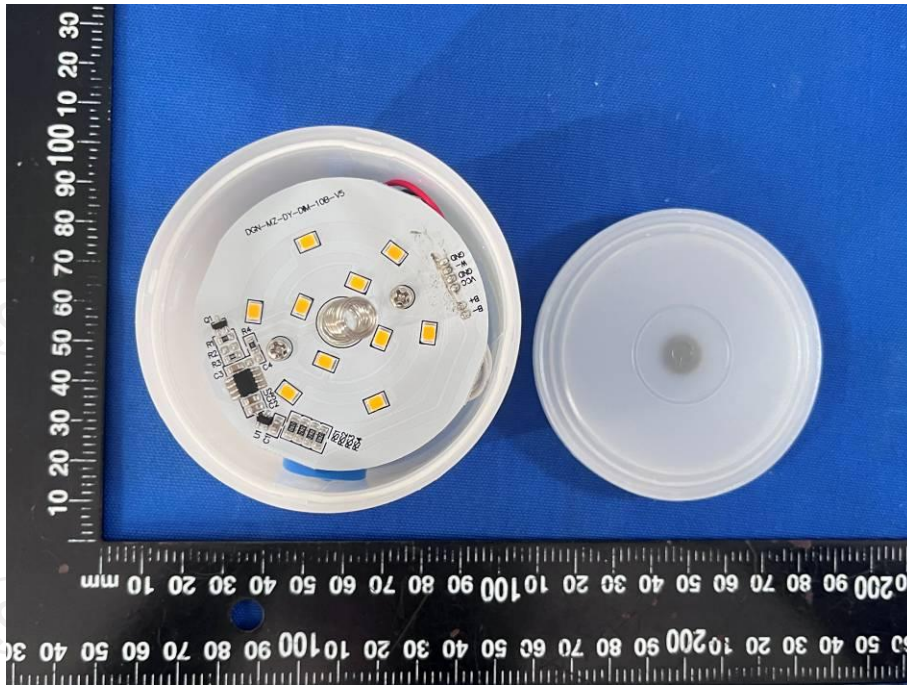


Photo 8- Internal view

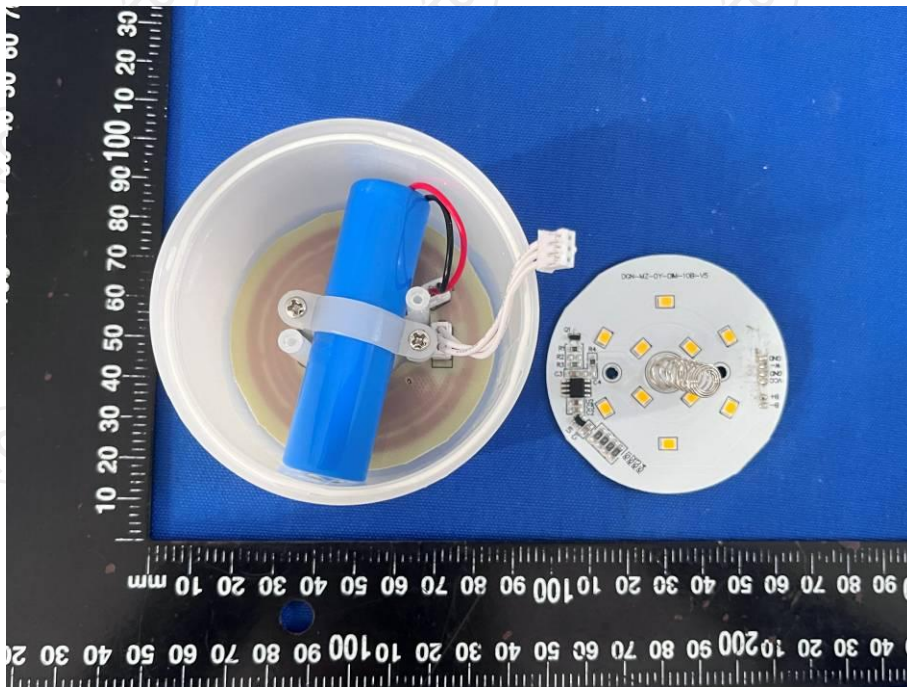


Photo 9- Internal view

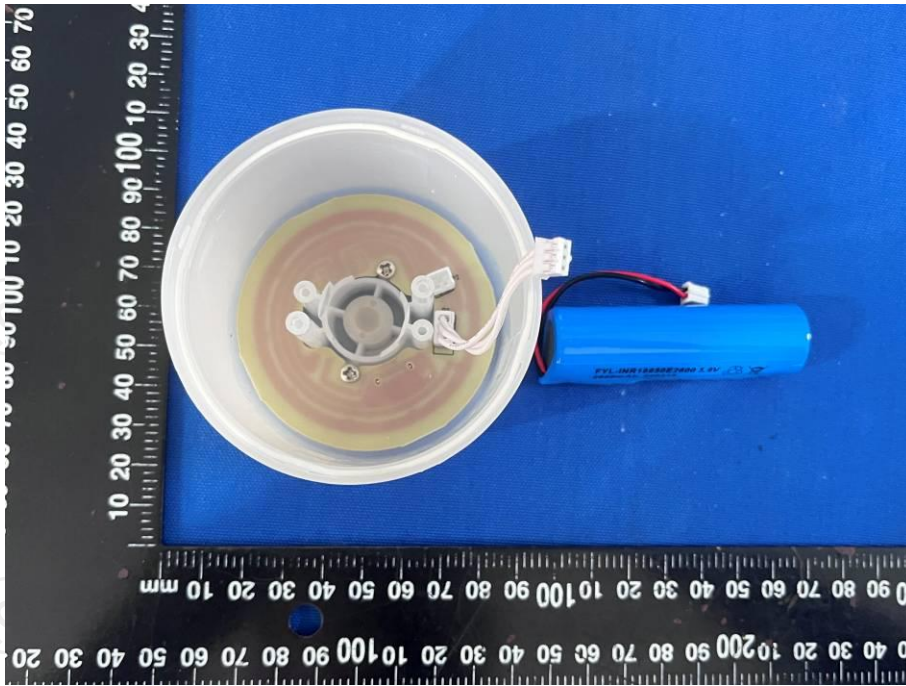


Photo 10- Internal view



Photo 11- Internal view

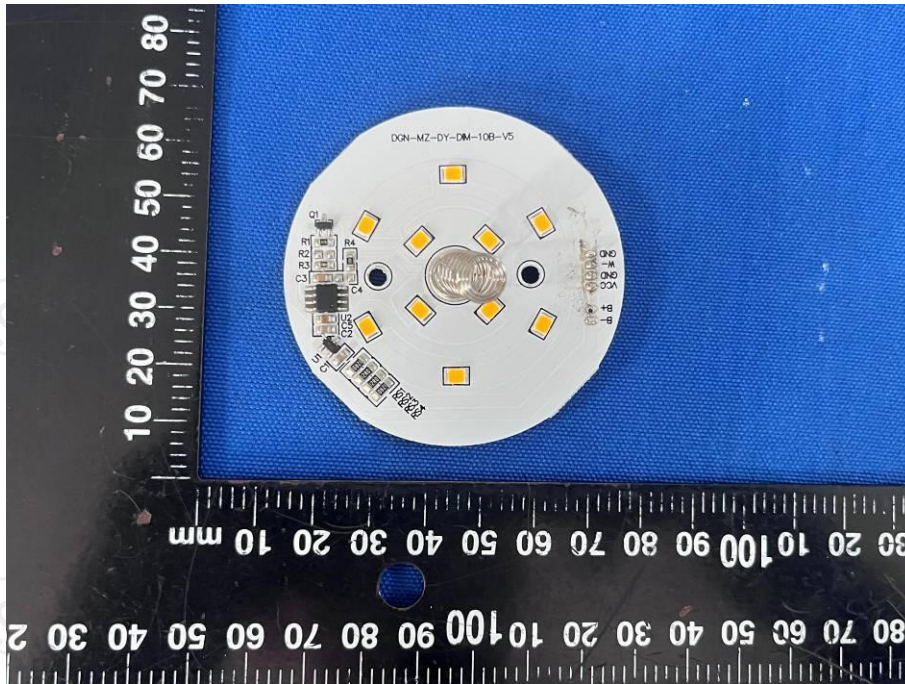


Photo 12- Internal view

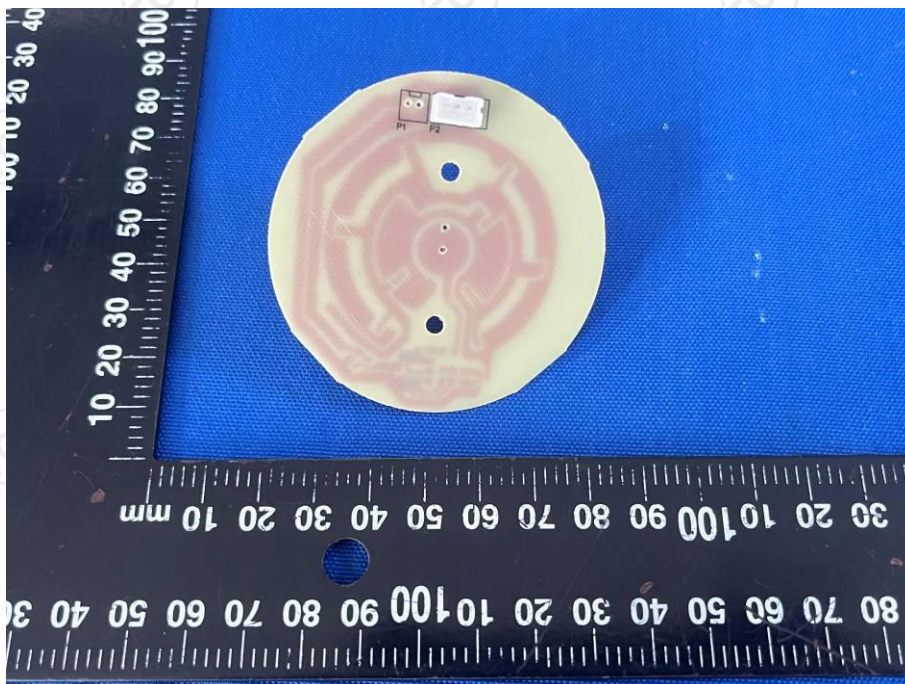


Photo 13- Internal view


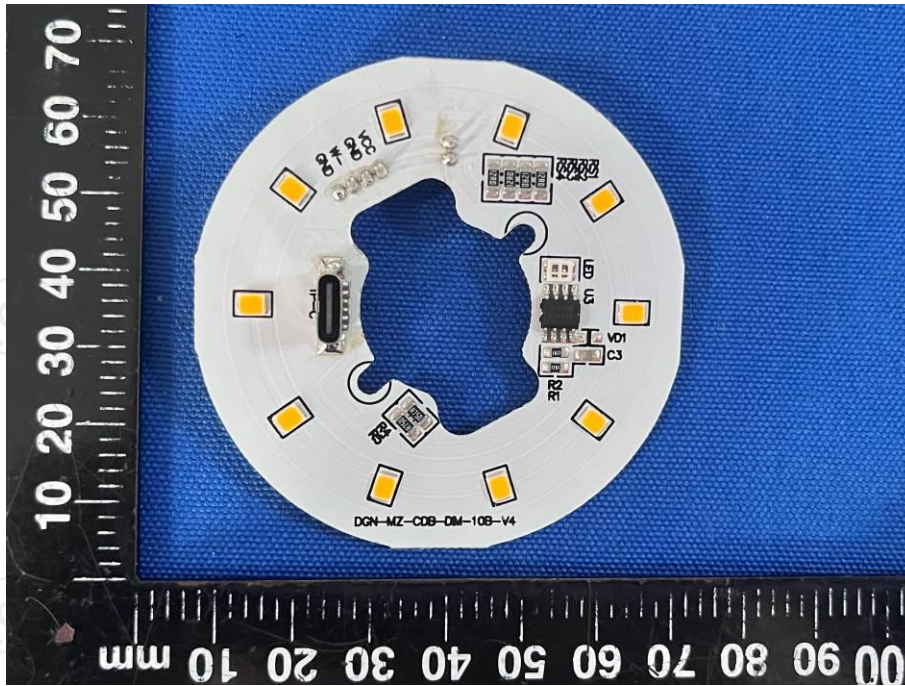


Photo 14- Internal view

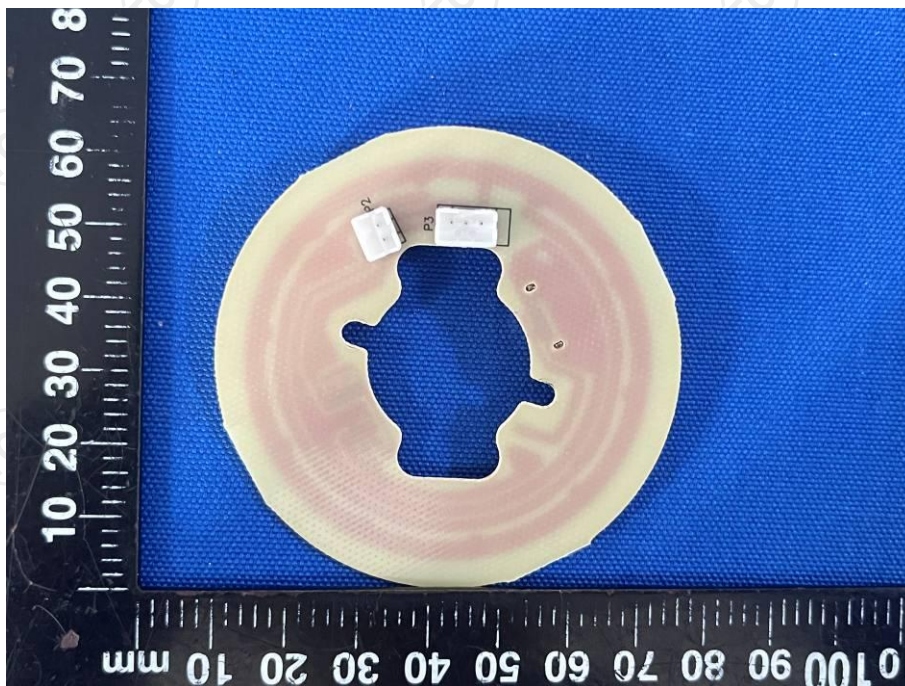

---End of attachment---