

**BRAYTRON S.R.L****CE LVD REPORT**

Prepared For:	BRAYTRON S.R.L B.DUL IULIU MANIU, NR.616, CORP B, ETAJ 1 SECTOR 6, 061129,BUCHAREST,ROMANIA
Product Name:	CEILING FIXTURE
Trade Name:	BRAYTRON
Main Test Model:	BH04-00301
Additional Model:	See Annex B
Prepared By :	BST Testing (Shenzhen) Co., Ltd.
	No.7, New Era Industrial Zone, Guantian, Bao'an District, Shenzhen, Guangdong, China
Test Date:	Nov. 08, 2021 - Nov. 17, 2021
Date of Report :	Nov. 17, 2021
Report No.:	BSTXD211121036201SR

**TEST REPORT****EN 60598-2-1****Luminaires****Part 2: Particular requirements****Section One – Fixed general purpose luminaires**

Testing Laboratory Name	BST Testing (Shenzhen) Co., Ltd.
Address	No.7, New Era Industrial Zone, Guantian, Bao'an District, Shenzhen, Guangdong, China
Testing location	BST Testing (Shenzhen) Co., Ltd.
Applicant's Name	BRAYTRON S.R.L
Address	B.DUL IULIU MANIU, NR.616, CORP B, ETAJ 1 SECTOR 6, 061129, BUCHAREST, ROMANIA
Manufacturer	DEMGRUP INTERNATIONAL LIGHTING LIMITED
Address	UNIT D 16/F, ONE CAPITAL PLACE, 18 LUARD ROAD, WAN CHAI, HONG KONG
Test specification	
Standard.....	EN IEC 60598-2-1:2021 EN IEC 60598-1:2021
Trade Name.....	BRAYTRON
Procedure deviation	N/A
Non-standard test method	N/A
Test item description	CEILING FIXTURE
Model and/or type reference ...	See page 1
Rating(s).....	220-240V~, 50/60Hz, 35W
Test case verdicts	
Test case does not apply to the test object :	N/A
Test item does meet the requirement	P(ass)
Test item does not meet the requirement .. :	F(ail)

**General remarks**

This report shall not be reproduced except in full without the written approval of the testing laboratory.

The test results presented in this report relate only to the item(s) tested.

"(see remark #)" refers to a remark appended to the report.

"(see Annex #)" refers to an annex appended to the report.

Clause numbers between brackets refer to clauses in EN 60598-1.

Throughout this report a comma is used as the decimal separator.

General product information:

The series products have the same circuit diagram, PCB layout and functionality. The differences are the model name, so, we select BH04-00301 to test.

Copy of marking plate:

Prepared by :

Rain Zhang

Engineer

Reviewer :

Mei S.

Supervisor

Approved & Authorized Signer :





EN 60598-2-1			
Cl.	Requirement – Test	Result	Verdict
1.1 (0)	SCOPE		P
1.1 (0.1)	More sections applicable.....:	Yes [☒] No [☐]	—
1.4 (2)	CLASSIFICATION		P
1.4 (2.2)	Type of protection.....:	Class I	—
1.4 (2.3)	Degree of protection.....:	IP20	—
1.4 (2.4)	Luminaire only suitable for non-combustible materials	No	—
	Luminaire suitable for normally flammable surfaces.....:	Yes	—
	Luminaire suitable to be covered by insulating material.....:	No	—
1.4 (2.5)	Luminaire for normal use	Yes	—
	Luminaire for rough service	No	—
1.5 (3)	MARKING		P
1.5 (3.2)	Marking on luminaires		P
	Position of the marking	On the enclosure	P
	Format of symbols/text		P
1.5 (3.3)	Additional information		P
	Language of instructions	English	P
1.5 (3.3.1)	Combination luminaires		N
1.5 (3.3.2)	Nominal frequency in Hz	50/60Hz	P
1.5 (3.3.3)	Operating temperature		P
1.5 (3.3.4)	Symbol or warning notice		N
1.5 (3.3.5)	Wiring diagram		N
1.5 (3.3.6)	Special conditions		N
1.5 (3.3.7)	Metal halid lamp luminaire – warning	Not metal halide lamp	N
1.5 (3.3.8)	Limitation for semi-luminaires	Not semi-luminaires	N
1.5 (3.3.9)	Power factor and supply current		P
1.5 (3.3.10)	Suitability for use indoors		P
1.5 (3.3.11)	Luminaires with remote control	remote control	P
1.5 (3.3.12)	Clip-mounted luminaire – warning		P
1.5 (3.3.13)	Specifications of protective shields	No protective shields	N



EN 60598-2-1			
Cl.	Requirement – Test	Result	Verdict
1.5 (3.3.14)	Symbol for nature of supply	~	P
1.5 (3.3.15)	Rated current of socket outlet		N
1.5 (3.3.16)	Rough service luminaire	Ordinary luminaire	N
1.5 (3.3.17)	Mounting instruction for type Y, type Z and some type X attachments	Type Y	P
1.5 (3.3.18)	Non-ordinary luminaires with PVC cable	Ordinary luminaire	N
1.5(3.3.19)	Protective conductor current in instruction if applicable		N
1.5(3.3.20)	Provided with information if not intended to be mounted within arms reach		P
1.5 (3.3.101)	Terminal block is not supplied with luminaire		P
1.5 (3.4)	Test with water	15s with water	P
	Test with hexane	15s with hexane	P
	Legible after test	The marking is legible	P
	Label attached	The marking not be easily removable and shows no curling	P

1.6 (4)	CONSTRUCTION		P
1.6 (4.2)	Components replaceable without difficulty		P
1.6 (4.3)	Wireways smooth and free from sharp edges		P
1.6 (4.4)	Lampholders		P
1.6 (4.4.1)	Integral lampholder		P
1.6 (4.4.2)	Wiring connection		P
1.6 (4.4.3)	Lampholder for end-to-end mounting		N
1.6 (4.4.4)	Positioning		P
1.6 (4.4.5)	Peak pulse voltage		N
1.6 (4.4.6)	Centre contact		N
1.6 (4.4.7)	Rough service luminaires	Ordinary luminaires	N
1.6 (4.4.8)	Lamp connectors	lamp connector provided	P
1.6 (4.4.9)	Caps and bases correctly used		P
1.6 (4.5)	Starter holders		N
	Starter holder in luminaires other than class II		N
	Starter holder class II construction		N
1.6 (4.6)	Terminal blocks		P



EN 60598-2-1			
Cl.	Requirement – Test	Result	Verdict
	Tails		P
	Unsecured blocks		N
1.6 (4.7)	Terminals and supply connections		P
1.6 (4.7.1)	Contact to metal parts		N
1.6 (4.7.2)	Test 8 mm live conductor		N
	Test 8 mm earth conductor		N
1.6 (4.7.3)	Terminals for supply conductors		N
1.6 (4.7.4)	Terminals other than supply connection		N
1.6 (4.7.5)	Heat-resistant wiring/sleeves		N
1.6 (4.7.6)	Multi-pole plug		N
1.6 (4.8)	Switches:		P
	- adequate rating		P
	- adequate fixing		P
	- polarized supply		N
1.6 (4.9)	Insulating lining and sleeves		P
1.6 (4.9.1)	Retainment		P
	Method of fixing..... :		P
1.6 (4.9.2)	Insulated linings and sleeves		P
	a) & c) Insulation resistance and electric strength		P
	b) Ageing test. Temperature (°C) :		P
1.6 (4.10)	Insulation of Class II luminaires		P
1.6 (4.10.1)	No contact, mounting surface - accessible metal parts - wiring of basic insulation		P
	Safe installation fixed luminaires		P
	Capacitors		N
	Interference suppression capacitors according to IEC 60384-14		P
1.6 (4.10.2)	Assembly gaps:		P
	- not coincidental		P
	- no straight access with test probe		P
1.6 (4.10.3)	Retainment of insulation:		P
	- fixed	Cannot remove easily	P
	- unable to be replaced; luminaire inoperative		P
	- sleeves retained in position		P
	- lining in lampholder		N
1.6 (4.11)	Electrical connections		P



EN 60598-2-1			
Cl.	Requirement – Test	Result	Verdict
1.6 (4.11.1)	Contact pressure	Not transmitted through insulating material	P
1.6 (4.11.2)	Screws:		N
	- self-tapping screws		N
	- thread-cutting screws		N
	- at least two self-tapping screws		N
1.6 (4.11.3)	Screw locking:		N
	- spring washer		N
	- rivets		N
1.6 (4.11.4)	Material of current-carrying parts		P
1.6 (4.11.5)	No contact to wood	No wood material in the luminaire	P
1.6 (4.11.6)	Electro-mechanical contact systems	No such systems	N
1.6 (4.12)	Mechanical connections and glands		P
1.6 (4.12.1)	Screws not made of soft metal		P
	Screws of insulating material		N
	Torque test: torque (Nm); part..... :		N
	Torque test: torque (Nm); part..... :		N
	Torque test: torque (Nm); part..... :		N
1.6 (4.12.2)	Screws with diameter < 3 mm screwed into metal		N
1.6 (4.12.4)	Locked connections:		N
	- fixed arms; torque (Nm)..... :		N
	- lampholder; torque (Nm)..... :		N
	- push-button switches; torque 0,8 Nm..... :		N
1.6 (4.12.5)	Screwed glands; force (N)..... :	No screwed gland	N
1.6 (4.13)	Mechanical strength		P
1.6 (4.13.1)	Impact tests:		P
	- fragile parts; energy (Nm)..... :	0.2 Nm	P
	- other parts; energy (Nm)..... :	0.35 Nm	P
	1) live parts	Not access	P
	2) linings		P



EN 60598-2-1			
Cl.	Requirement – Test	Result	Verdict
	3) protection	Continue to afford the degree of protection against ingress of dust, solid objects and moisture	P
	4) covers	No break	P
1.6 (4.13.3)	Straight test finger	Can't touch with live part with 30N	P
1.6 (4.13.4)	Rough service luminaires		N
	a) fixed		N
	b) hand-held		N
	c) delivered with a stand		N
	d) for temporary installations and suitable for mounting on a stand		N
1.6 (4.13.6)	Tumbling barrel		N
1.6 (4.14)	Suspensions and adjusting devices		N
1.6 (4.14.1)	Mechanical load:		N
	A) four times the weight		N
	B) torque 2,5 Nm		N
	C) bracket arm; bending moment (Nm).....:		N
	D) load track-mounted luminaires		N
	E) clip-mounted luminaires, glass-shelve. Thickness (mm)		N
	metal rod. Diameter (mm)		N
1.6 (4.14.2)	Load to flexible cables		N
	Mass (kg).....:		N
	Stress in conductors (N/mm ²).....:		N
	Semi-luminaires – mass (kg)		N
	Semi-luminaires – bending moment (Nm).....:		N
1.6 (4.14.3)	Adjusting devices:		N
	- flexing test; number of cycles.....:		N
	- strands broken		N
	- electric strength test afterwards		N
1.6 (4.14.4)	Telescopic tubes: cords not fixed to tube; no strain on conductors	No telescopic tubes	N
1.6 (4.14.5)	Guide pulleys	No guide pulleys	N



EN 60598-2-1			
Cl.	Requirement – Test	Result	Verdict
1.6 (4.14.6)	Strain on socket-outlets	No socket-outlet	N
1.6 (4.15)	Flammable materials:		P
	- glow-wire test 650 °C		P
	- spacing $\geq$ 30 mm		N
	- screen withstanding test of 13.3.1		N
	- screen dimensions		N
	- no fiercely burning material		P
	- thermal protection		N
	- electronic circuits exempted		N
1.6 (4.15.2)	Luminaires made of thermoplastic material with lamp control gear		N
	a) construction		N
	b) temperature sensing control		N
	c) surface temperature		N
1.6 (4.16)	Luminaires for mounting on normally flammable surfaces		P
	No lamp control gear	(compliance with Section 12)	N
1.6 (4.16.1)	Electronic lamp control gear		P
	Lamp control gear spacing:		N
	- spacing 35 mm		N
	- spacing 10 mm		N
1.6 (4.16.2)	Thermal protection:		N
	- in lamp control gear		N
	- external		N
	- fixed position		N
	- temperature marked lamp control gear		N
1.6 (4.16.3)	The test of 12.6.	(see 12.6)	N
1.6 (4.17)	Drain holes	Ordinary luminaire	N
	Clearance at least 5 mm		N
1.6 (4.18)	Resistance to corrosion:		P
1.6 (4.18.1)	- rust- resistance	Ordinary luminaire	N
1.6 (4.18.2)	- season cracking in copper		P
1.6 (4.18.3)	- corrosion of aluminium		N
1.6 (4.19)	Ignitors compatible with ballast	No ignitors	N



EN 60598-2-1			
Cl.	Requirement – Test	Result	Verdict
1.6 (4.20)	Rough service vibration..... :	Ordinary luminaire	N
1.6 (4.21)	Protective shield:		N
1.6 (4.21.1)	Shield fitted		N
1.6 (4.21.2)	Particles from a shattering lamp not impair safety		N
1.6 (4.21.3)	No direct path		N
1.6 (4.21.4)	Impact test on shield		N
	Glow-wire test on lamp compartment		N
1.6 (4.22)	Attachments to lamps	No attachments	N
1.6 (4.23)	Semi-luminaires comply class II		N
1.6 (4.24)	UV radiation		N
1.6 (4.25)	No sharp point or edges	No sharp points or edges	P
1.6 (4.26)	Short-circuit protection:		P
1.6 (4.26.1)	Uninsulated accessible SELV parts		P
1.6 (4.26.2)	Short-circuit test		P
1.6 (4.26.3)	Test chain according to Figure 29		P

1.7 (11)	CREEPAGE DISTANCES AND CLEARANCES		P
	Working voltage (V)..... :	220-240Vac	—
	Voltage form	Sinusoidal	—
	PTI	< 600V	—
	Rated pulse voltage (kV)		—
	(1) Current-carrying parts of different polarity: cr (mm); cl (mm)..... :	Cr >2.5mm, Cl>1.5mm	P
	(2) Current-carrying parts and accessible parts: cr (mm); cl (mm)..... :	Cr >5.0mm, Cl>3.0mm	P
	(3) Parts becoming live due to breakdown of basic insulation and metal parts: cr (mm); cl (mm)..... :		N
	(4) Outer surface of cable where it is clamped and metal parts: cr (mm); cl (mm)..... :		N
	(5) Current-carrying parts of switches and metal parts, after removal of insulation: cr (mm); cl (mm)..... :		N
	(6) Current-carrying parts and supporting surface: cr (mm); cl (mm)..... :	Cr >5.0mm, Cl>3.0mm	P



EN 60598-2-1			
Cl.	Requirement – Test	Result	Verdict
1.8 (7)	PROVISION FOR EARTHING		N
1.8 (7.2.1 + 7.2.3)	Accessible metal parts		N
	Metal parts in contact with supporting surface		N
	Resistance < 0,5 Ω		N
	Self-tapping screws used		N
	Thread-forming screws		N
	Connector earthing first		N
1.8 (7.2.2 + 7.2.3)	Earth continuity in joints etc.		N
1.8 (7.2.4)	Locking of clamping means		N
	Compliance with 4.7.3		N
1.8 (7.2.5)	Earth terminal integral part of connector socket		N
1.8 (7.2.6)	Earth terminal adjacent to mains terminals		N
1.8 (7.2.7)	Electrolytic corrosion of the earth terminal		N
1.8 (7.2.8)	Material of earth terminal		N
	Contact surface bare metal		N
1.8 (7.2.10)	Class II luminaire for looping-in		N
1.8 (7.2.11)	Earthing core coloured green-yellow		N
	Length of earth conductor		N
1.9 (14)	SCREW TERMINALS		N
	Separately approved; component list		N
	Part of the luminaire		N
1.9 (15)	SCREWLESS TERMINALS		N
	Separately approved; component list		N
	Part of the luminaire		N
1.10 (5)	EXTERNAL AND INTERNAL WIRING		P
1.10 (5.2)	Supply connection and external wiring		P
1.10 (5.2.1)	Means of connection.....: Wire leader		P
1.10 (5.2.2)	Type of cable.....:		P
	Nominal cross-sectional area (mm ²).....:		P



EN 60598-2-1			
Cl.	Requirement – Test	Result	Verdict
1.10 (5.2.3)	Type of attachment, X, Y or Z	Type Y	P
1.10 (5.2.5)	Type Z not connected to screws		N
1.10 (5.2.6)	Cable entries:		P
	- suitable for introduction		P
	- adequate degree of protection		P
1.10 (5.2.7)	Cable entries through rigid material have rounded edges		P
1.10 (5.2.8)	Insulating bushings:		N
	- suitably fixed		N
	- material in bushings		N
	- tubes or guards made of insulating material		N
1.10 (5.2.9)	Locking of screwed bushings		P
1.10 (5.2.10)	Cord anchorage:		N
	- covering protected from abrasion		N
	- clear how to be effective		N
	- no mechanical or thermal stress		N
	- no tying of cables into knots etc.		N
	- insulating material or lining		N
1.10 (5.2.10.1)	Cord anchorage for type X attachment:		N
	a) at least one part fixed		N
	b) types of cable		N
	c) no damaging of the cable		N
	d) whole cable can be mounted		N
	e) no touching of clamping screws		N
	f) metal screw not directly on cable		N
	g) replacement without special tool		N
	Glands not used as anchorage		N
	Labyrinth type anchorages		N
1.10 (5.2.10.2)	Adequate cord anchorage for type Y and type Z attachment	type Y	P
1.10 (5.2.10.3)	Tests:		N
	- impossible to push cable; unsafe		N



EN 60598-2-1			
Cl.	Requirement – Test	Result	Verdict
	- pull test: 25 times; pull (N).....:		N
	- torque test: torque (Nm).....:		N
	- displacement ≤ 2 mm		N
	- no movement of conductors		N
	- no damage of cable or cord		N
1.10 (5.2.11)	External wiring passing into luminaire		P
1.10 (5.2.12)	Looping-in terminals		N
1.10 (5.2.13)	Wire ends not tinned		P
	Wire ends tinned: no cold flow		P
1.10 (5.2.14)	Mains plug same protection		N
	Class III luminaire plug		N
1.10 (5.2.16)	Appliance inlets (IEC 60320)	No appliance inlet	N
	Appliance couplers of class II type		N
1.10 (5.2.17)	No standardized interconnecting cables properly assembled		N
1.10 (5.2.18)	Used plug in accordance with		N
	-IEC 60083		N
	-Other standard		N
1.10 (5.3)	Internal wiring		N
1.10 (5.3.1)	Internal wiring of suitable size and type		N
	Through wiring		N
	- not delivered/ mounting instruction		N
	- factory assembled		N
	- socket outlet loaded (A).....:		N
	- temperatures.....:		P
	Green- yellow for earth only		N
1.10 (5.3.1.1)	Internal wiring connected directly to fixed wiring		N
	Cross-sectional area (mm ²).....:		N
	Insulation thickness		N
	Extra insulation added where necessary		N
1.10 (5.3.1.2)	Internal wiring connected to fixed wiring via internal current-limiting device		N



EN 60598-2-1			
Cl.	Requirement – Test	Result	Verdict
	Adequate cross-sectional area and insulation thickness		N
1.10 (5.3.1.3)	Double or reinforced insulation for class II		N
1.10 (5.3.1.4)	Conductors without insulation	No such conductors	N
1.10 (5.3.1.5)	SELV current-carrying parts		N
1.10 (5.3.1.6)	Insulation thickness other than PVC or rubber		N
1.10 (5.3.2)	Sharp edges etc.		N
	No moving parts of switches etc.	No such part	N
	Joints, raising/lowering devices		N
	Telescopic tubes etc.	No such device	N
	No twisting over 360°		N
1.10 (5.3.3)	Openings		N
	Bushings not removable		N
	Bushings in sharp openings		N
	Cables with protective sheath		N
1.10 (5.3.4)	Joints and junctions effectively insulated		N
1.10 (5.3.5)	Strain on internal wiring		N
1.10 (5.3.6)	Wire carriers		N
1.10 (5.3.7)	Wire ends may be tinned		N
	Wire ends tinned: no cold flow		N

1.11 (8)	PROTECTION AGAINST ELECTRIC SHOCK		P
1.11 (8.2.1)	Live parts not accessible	No access of live part in normal use	P
	Basic insulated parts not used on the outer surface without appropriate protection		P
	Protection in any position		P
	Double-ended tungsten filament lamp		N
	Insulation lacquer not reliable	No insulation lacquer	N
	Double-ended high pressure discharge lamp		N
1.11 (8.2.2)	Portable luminaire adjusted in most unfavourable position		N



EN 60598-2-1			
Cl.	Requirement – Test	Result	Verdict
1.11 (8.2.3)	Class II luminaire:		N
	- basic insulated metal parts not accessible during starter or lamp replacement		N
	- basic insulation not accessible other than during starter or lamp replacement		P
	- glass protective shields not used as supplementary insulation		P
	Class I luminaire with BC lampholder		N
1.11 (8.2.4)	Portable luminaire:		N
	- protection independent of supporting surface		N
	- terminal block completely covered		N
1.11 (8.2.5)	Compliance with the standard test finger or relevant probe		P
1.11 (8.2.6)	Covers reliably secured		P
1.11 (8.2.7)	Discharging of capacitors $\geq 0,5 \mu\text{F}$		P
	Portable plug connected luminaire with capacitor		N
	Other plug connected luminaire with capacitor		N
	Discharge device on or within capacitor		P
	Discharge device mounted separately		N

1.12 (12)	ENDURANCE TEST AND THERMAL TEST		P
1.12 (12.3)	Endurance test:		P
	- mounting- position.....:	Normal position	—
	- test temperature (°C).....:	35°C	—
	- total duration (h).....:	168h	—
	- supply voltage: Un factor; calculated voltage (V).....:	240x1.1=264V	—
	- lamp used.....:		—
1.12 (12.3.2)	After endurance test:		P
	- no part unserviceable		P
	- luminaire not unsafe		P
	- no damage to track system		N
	- marking legible	Marking still legible and shows no curling	P
	- no cracks, deformation etc.		P
1.12 (12.4)	Thermal test (normal operation)	(see Annex 2)	P



EN 60598-2-1			
Cl.	Requirement – Test	Result	Verdict
1.12 (12.5)	Thermal test (abnormal operation)	(see Annex 2)	P
1.12 (12.6)	Thermal test (failed lamp control gear condition):		P
1.12 (12.6.1)	- case of abnormal conditions..... :		—
	- electronic lamp control gear		P
	- measured winding temperature (°C) at 1,1 Un. :		—
	- measured mounting surface temperature (°C) at 1,1 Un..... :		P
	- calculated mounting surface temperature (°C). :		P
	- track-mounted luminaires		N
1.12 (12.6.2)	Temperature sensing control		N
	- case of abnormal conditions..... :		—
	- thermal link		N
	- manual reset cut-out		N
	- auto reset cut-out		N
	- measured mounting surface temperature (°C) :		N
	- track-mounted luminaires		N
1.12 (12.7)	Thermal test (failed lamp control gear in plastic luminaires):		N
	- case of abnormal conditions..... :		—
1.12 (12.7.1)	- measured winding temperature (°C) at 1,1 Un. :		—
	- measured temperature of fixing point/ exposed part (°C) at 1,1 Un..... :		N
	- calculated temperature of fixing point/ exposed part (°C)..... :		N
1.12 (12.7.2)	Temperature sensing control		N
	- thermal link		N
	- manual reset cut-out		N
	- auto reset cut-out		N
	- measured temperature of fixing point/ exposed part (°C) :		N
1.13 (9)	RESISTANCE TO DUST, SOLID OBJECTS AND MOISTURE		P
1.13 (9.2)	Tests for ingress of dust, solid objects and moisture:		P
	- classification according to IP..... :		—
	- mounting position during test..... :		—
	- fixing screws tightened; torque (Nm)..... :		—



EN 60598-2-1			
Cl.	Requirement – Test	Result	Verdict
	- tests according to clauses..... :		—
	- electric strength test afterwards		P
	a) no deposit in dust-proof luminaire		N
	b) no talcum in dust-tight luminaire		N
	c) no trace of water on current-carrying parts or where it could become a hazard		N
	d) i) For luminaires without drain holes – no water entry		N
	d) ii) For luminaires with drain holes – no hazardous water entry		N
	e) no water in watertight luminaire		N
	f) no contact with live parts (IP 2X)		N
	f) no entry into enclosure (IP 3X and IP 4X)		N
	f) no contact with live parts (IP 3X and IP 4X)		N
1.13 (9.3)	Humidity test 48 h	R.H.:95% T: 35°C	P
1.14 (10)	INSULATION RESISTANCE AND ELECTRIC STRENGTH		P
1.14 (10.2.1)	Insulation resistance test		P
	Insulation resistance (MΩ):		--
	SELV:		N
	- between current-carrying parts of different polarity..... :		N
	- between current-carrying parts and mounting surface..... :		N
	- between current-carrying parts and metal parts of the luminaire..... :		N
	Other than SELV:		P
	- between live parts of different polarity..... :	>2MΩ	P
	- between live parts and mounting surface..... :	>4MΩ	P
	- between live parts and enclosure..... :	>4MΩ	P
	- between live parts of different polarity through action of a switch..... :	No switch	N
1.14 (10.2.2)	Electric strength test		P
	Dummy lamp		N
	Luminaires with ignitors after 24 h test		N
	Luminaires with manual ignitors		N



EN 60598-2-1			
Cl.	Requirement – Test	Result	Verdict
	Test voltage (V):		P
	SELV:		N
	- between current-carrying parts of different polarity..... :		N
	- between current-carrying parts and mounting surface..... :		N
	- between current-carrying parts and metal parts of the luminaire..... :		N
	Other than SELV:		P
	- between live parts of different polarity..... :	1480V	P
	- between live parts and mounting surface..... :	1480V	P
	- between live parts and enclosure..... :	1480V	P
	- between live parts of different polarity through action of a switch..... :		N
1.14 (10.3.1)	Leakage current (mA)..... :	0.025mA < 1.0mA	P
1.15 (13)	RESISTANCE TO HEAT, FIRE AND TRACKING		P
1.15 (13.2.1)	Ball-pressure test:		P
	- part tested; temperature (°C)..... :		N
1.15 (13.3.1)	Needle flame test (10 s):		P
	- part tested..... :		N
1.15 (13.3.2)	Glow wire test (650°C):		N
	- part tested..... :		N
1.15 (13.4.1)	Tracking test: part tested..... :		N
	COMMON MODIFICATIONS		N
(3.3.101 + 5.2.1)	For luminaires connected by tails, information about terminal block		N
(5.2.2)	Cables equal to HD 21 S2 or HD 22 S2		N
(5.2.15)	Colour code low voltage		N
ZB	ANNEX ZB, SPECIAL NATIONAL CONDITIONS		N
(2.2)	Class 0 not accepted		N
(3.3)	DK: power supply cord with label		N
	IT: warning label on Class 0 luminaire		N



EN 60598-2-1			
Cl.	Requirement – Test	Result	Verdict
(4.5.1)	DK: socket-outlets		N
(4.5.1)	FR: socket-outlets		N
(5.2.1)	DK, FI, SE, GB: type of plug		N

ZC	ANNEX ZC, NATIONAL DEVIATIONS		N
(13.3)	DK: Needle flame test or glow-wire test 750°C for luminaires in access routes		N
(13.3)	GB: Requirements according to United Kingdom Building Regulation		N
(13.3.2)	FR: Glow-wire test 850°C alt. 750°C for luminaires in premises open to public and workers		N

ANNEX 1: components					P
object/part No.	manufacturer/ trademark	type/model	technical data	standard	mark(s) of conformity
TERMINAL BLOCKS	JiangXi Kimbetter Electrical Co.Ltd	PA8	AC450V,17A	VDE 0613	VDE*/40025416
SOCKET	Foshan Nanhai Huangfeng LIGHTING ELECTRIC TACTORY	HF505	AC250V/4A	VDE 0616	VDE*/40031653

	ANNEX 2: temperature measurements, thermal tests of Section 12		P
	Type reference..... :	See page 2	—
	Lamp used..... :	LED	—
	Lamp control gear used..... :	Electrical control gear	—
	Mounting position of luminaire..... :	Normal position	—
	Supply wattage (W)..... :	45W	—
	Supply current (A)..... :	0.18A	—
	Calculated power factor..... :	--	—
	Table: measured temperatures corrected for ta = 25 °C:		P
	- abnormal operating mode..... :	--	—
	- test 1: rated voltage..... :	--	—
	- test 2: 1,06 times rated voltage or 1,05 times rated wattage..... :	240V x1.06=254.4V	—
	- test 3: Load on wiring to socket-outlet, 1,06 times voltage or 1,05 times wattage..... :	--	—
	- test 4: 1,1 times rated voltage or 1,05 times rated wattage..... :	--	—



EN 60598-2-1						
Cl.	Requirement – Test			Result		Verdict
temperature (°C) of part		clause 12.4 - normal			clause 12.5 - abnormal	
	test 1	test 2	test 3	limits	test 4	limit
Enclosure		51.5		90		
Internal wiring		53.7		105		
Ambient		25.6		--		
	ANNEX 3: screw terminals (part of the luminaire)					N
(14)	SCREW TERMINALS					N
(14.2)	Type of terminal..... :					—
	Rated current (A)..... :					—
(14.3.2.1)	One or more conductors					N
(14.3.2.2)	Special preparation					N
(14.3.2.3)	Terminal size					N
	Cross-sectional area (mm²).....:					N
(14.3.3)	Conductor space (mm)..... :					N
(14.4)	Mechanical tests					N
(14.4.1)	Minimum distance					N
(14.4.2)	Cannot slip out					N
(14.4.3)	Special preparation					N
(14.4.4)	Nominal diameter of thread (metric ISO thread)...:					N
	External wiring					N
	No soft metal					N
(14.4.5)	Corrosion					N
(14.4.6)	Nominal diameter of thread (mm)..... :					N
	Torque (Nm)..... :					N
(14.4.7)	Between metal surfaces					N
	Lug terminal					N
	Mantle terminal					N
	Pull test; pull (N).....:					N
(14.4.8)	Without undue damage					N
	ANNEX 4: SCREWLESS TERMINALS (PART OF THE LUMINAIRE)					N
(15)	SCREWLESS TERMINALS					N
(15.2)	Type of terminal..... :					—
	Rated current (A)..... :					—
(15.3.1)	Material					N
(15.3.2)	Clamping					N



EN 60598-2-1			
Cl.	Requirement – Test	Result	Verdict
(15.3.3)	Stop		N
(15.3.4)	Unprepared conductors		N
(15.3.5)	Pressure on insulating material		N
(15.3.6)	Clear connection method		N
(15.3.7)	Clamping independently		N
(15.3.8)	Fixed in position		N
(15.3.10)	Conductor size		N
	Type of conductor		N
(15.5.1)	Terminals internal wiring		N
(15.5.1.1)	Pull test spring-type terminals (4 N, 4 samples)		N
(15.5.1.2)	Pull test pin or tab terminals (4 N, 4 samples)		N
	Insertion force not exceeding 50 N		N
(15.5.2)	Permanent connections: pull-off test (20 N)		N
(15.6)	Electrical tests		N
	Voltage drop (mV) after 1 h (4 samples).....:		N
	Voltage drop of two inseparable joints		N
	Number of cycles.....:		—
	Voltage drop (mV) after 10th alt. 25th cycle (4 samples).....:		N
	Voltage drop (mV) after 50th alt. 100th cycle (4 samples).....:		N
	After ageing, voltage drop (mV) after 10th alt. 25th cycle (4 samples).....:		N
	After ageing, voltage drop (mV) after 50th alt. 100th cycle (4 samples).....:		N
(15.7)	Terminals external wiring		N
	Terminal size and rating		N
(15.8.1)	Pull test spring-type terminals (4 samples); pull (N)		N
	Pull test pin or tab terminals (4 samples); pull (N)		N
(15.9)	Contact resistance test		N
	Voltage drop (mV) after 1 h		N



Add: No.7, New Era Industrial Zone, Guantian, Bao'an District, Shenzhen, Guangdong, China
Certificate Search: <http://www.bst-lab.com>, Tel: 400-962-6168, E-mail: christina@bst-lab.com



ANNEX A:

Photo-documentation

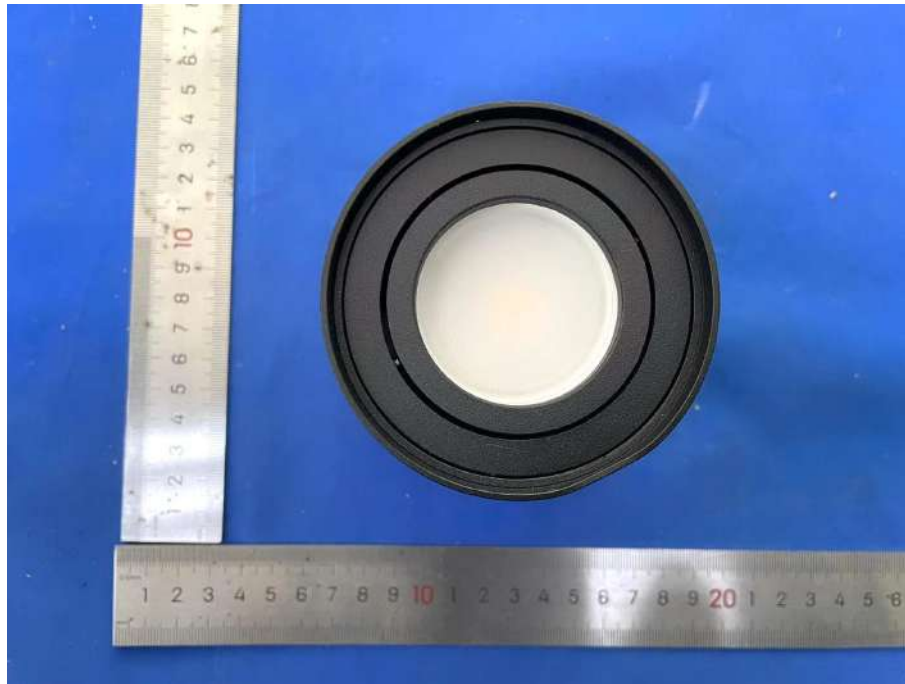


Photo 1 General Appearance of EUT



Photo 2 General Appearance of EUT

End of the report

**Annex B****Additional Model :**

BH03-001XX, BH03-002XX, BH03-003XX, BH03-004XX, BH03-005XX, BH03-006XX, BH03-007XX, BH03-008XX, BH03-009XX, BH03-010XX, BH03-011XX, BH03-012XX, BH03-013XX, BH03-014XX, BH03-015XX, BH03-016XX, BH03-017XX, BH03-018XX, BH03-019XX, BH03-020XX, BH03-021XX, BH03-022XX, BH03-023XX, BH03-024XX, BH03-025XX, BH03-026XX, BH03-027XX, BH03-028XX, BH03-029XX, BH03-030XX, BH03-031XX, BH03-032XX, BH03-033XX, BH03-034XX, BH03-035XX, BH03-036XX, BH03-037XX, BH03-038XX, BH03-039XX, BH03-040XX, BH03-041XX, BH03-042XX, BH03-043XX, BH03-044XX, BH03-045XX, BH03-046XX, BH03-047XX, BH03-048XX, BH03-049XX, BH03-050XX, BH03-051XX, BH03-052XX, BH03-053XX, BH03-054XX, BH03-056XX, BH03-057XX, BH03-058XX, BH03-059XX, BH03-060XX, BH03-061XX, BH03-062XX, BH03-063XX, BH03-064XX, BH03-065XX, BH03-066XX, BH03-067XX, BH03-068XX, BH03-069XX, BH03-070XX, BH03-071XX, BH03-072XX, BH03-073XX, BH03-074XX, BH03-075XX, BH03-076XX, BH03-077XX, BH03-078XX, BH03-079XX, BH03-080XX, BH03-081XX, BH03-082XX, BH03-083XX, BH03-084XX, BH03-085XX, BH03-086XX, BH03-087XX, BH03-088XX, BH03-089XX, BH03-090XX, BH03-091XX, BH03-092XX, BH03-093XX, BH03-094XX, BH03-095XX, BH03-096XX, BH03-097XX, BH03-098XX, BH03-099XX, BH04-001XX, BH04-002XX, BH04-003XX, BH04-004XX, BH04-005XX, BH04-006XX, BH04-007XX, BH04-008XX, BH04-009XX, BH04-010XX, BH04-011XX, BH04-012XX, BH04-013XX, BH04-014XX, BH04-015XX, BH04-016XX, BH04-017XX, BH04-018XX, BH04-019XX, BH04-020XX, BH04-021XX, BH04-022XX, BH04-023XX, BH04-024XX, BH04-025XX, BH04-026XX, BH04-027XX, BH04-028XX, BH04-029XX, BH04-030XX, BH04-031XX, BH04-032XX, BH04-033XX, BH04-034XX, BH04-035XX, BH04-036XX, BH04-037XX, BH04-038XX, BH04-039XX, BH04-040XX, BH04-041XX, BH04-042XX, BH04-043XX, BH04-044XX, BH04-045XX, BH04-046XX, BH04-047XX, BH04-048XX, BH04-049XX, BH04-050XX, BH04-051XX, BH04-052XX, BH04-053XX, BH04-054XX, BH04-056XX, BH04-057XX, BH04-058XX, BH04-059XX, BH04-060XX, BH04-061XX, BH04-062XX, BH04-063XX, BH04-064XX, BH04-065XX, BH04-066XX, BH04-067XX, BH04-068XX, BH04-069XX, BH04-070XX, BH04-071XX, BH04-072XX, BH04-073XX, BH04-074XX, BH04-075XX, BH04-076XX, BH04-077XX, BH04-078XX, BH04-079XX, BH04-080XX, BH04-081XX, BH04-082XX, BH04-083XX, BH04-084XX, BH04-085XX, BH04-086XX, BH04-087XX, BH04-088XX, BH04-089XX, BH04-090XX, BH04-091XX, BH04-092XX, BH04-093XX, BH04-094XX, BH04-095XX, BH04-096XX, BH04-097XX, BH04-098XX, BH04-099XX, BH05-001XX, BH05-002XX, BH05-003XX, BH05-004XX, BH05-005XX, BH05-006XX, BH05-007XX, BH05-008XX, BH05-009XX, BH05-010XX, BH05-011XX, BH05-012XX, BH05-013XX, BH05-014XX, BH05-015XX, BH05-016XX, BH05-017XX, BH05-018XX, BH05-019XX, BH05-020XX, BH05-021XX, BH05-022XX, BH05-023XX, BH05-024XX, BH05-025XX, BH05-026XX, BH05-027XX, BH05-028XX, BH05-029XX, BH05-030XX, BH05-031XX, BH05-032XX, BH05-033XX, BH05-034XX, BH05-035XX, BH05-036XX, BH05-037XX, BH05-038XX, BH05-039XX, BH05-040XX, BH05-041XX, BH05-042XX, BH05-043XX, BH05-044XX, BH05-045XX, BH05-046XX, BH05-047XX, BH05-048XX, BH05-049XX, BH05-050XX, BH05-051XX, BH05-052XX, BH05-053XX, BH05-054XX, BH05-056XX, BH05-057XX, BH05-058XX, BH05-059XX, BH05-060XX, BH05-061XX, BH05-062XX, BH05-063XX, BH05-064XX, BH05-065XX, BH05-066XX, BH05-067XX, BH05-068XX, BH05-069XX, BH05-070XX, BH05-071XX, BH05-072XX, BH05-073XX, BH05-074XX, BH05-075XX, BH05-076XX, BH05-077XX, BH05-078XX, BH05-079XX, BH05-080XX, BH05-081XX, BH05-082XX, BH05-083XX, BH05-084XX, BH05-085XX, BH05-086XX, BH05-087XX, BH05-088XX, BH05-089XX, BH05-090XX, BH05-091XX, BH05-092XX, BH05-093XX, BH05-094XX, BH05-095XX, BH05-096XX, BH05-097XX, BH05-098XX, BH05-099XX, BH04-106XX, BH04-301XX, BH04-303XX, BH04-506XX, BH04-606XX (X=0,1,2,3,4,5,6,7,8,9)